

For new designs refer to V23105.



T85 series

High Sensitivity, DIP PC Board Relay

File E45026

File LR35579

Features

- Ultra sensitive DC coils through 48 volts.
- Switches up to 2 amps.
- Standard DIP configuration mates with 16-pin socket.
- Bifurcated contacts in a 2 Form C arrangement.
- 1,500 volt surge strength – meets FCC Part 68.
- Well suited for application in telecommunications equipment, audio equipment and business machines.
- Immersion cleanable, plastic sealed case.
- Ultrasonic cleaning is not advised.

Contact Data @ 20°C

Contact Style	Series 4	Series 5
Arrangement:	Bifurcated 2 Form C (DPDT)	Bifurcated 2 Form C (DPDT)
Material: Stationary:	Gold overlay silver-palladium alloy	Gold overlay silver-nickel alloy
Movable:	Silver-palladium alloy	Gold overlay silver-nickel alloy
Initial Contact Resistance:	100 milliohms, max. @ 100mA, 6VDC	100 milliohms, max. @ 100mA, 6VDC
Ratings: Max. Switched Current:	1.25A, AC or DC	2A, AC or DC
Max. Switched Voltage:	60VDC, 120VAC	150VDC, 125VAC
Max. Switched Power:	24W or 60VA	30W or 62.5VA
Max. Carry Current:	2A, AC or DC	2A, AC or DC
Min. Switched Current:	10µA, AC or DC	10µA, AC or DC
Min. Switched Voltage:	50µV, AC or DC	50µV, AC or DC
Min. Switched Power:	25µW, AC or DC	25µW, AC or DC
Expected Mechanical Life:	20 million ops.	10 million ops.
Expected Electrical Life:	500,000 operations @ 1A, 24VDC, res. 200,000 operations @ .5A, 120VAC, res.	100,000 operations @ 2A, 30VDC 200,000 operations @ .4A, 120VAC

Initial Dielectric Strength

Between Open Contacts: 500V rms, 50/60 Hz., for 1 minute.

Between Poles: 1,000V rms, 50/60 Hz., for 1 minute.
1,500V rms surge per FCC Part 68.

Between Coil and Contacts: 1,000V rms, 50/60 Hz., for 1 minute.
1,500V rms surge per FCC Part 68.

Initial Insulation Resistance

Between Mutually Insulated Conductors: 10⁹ ohms @ 500VDC.

Coil Data @ 20°C

Voltage: 4.5 through 48VDC.

Nominal Power: See Coil Data table.

Maximum Coil Power: 725 milliwatts, for contact style series 4.
800 milliwatts, for contact style series 5.

Temperature Rise: 110°C per watt, typical.

Duty Cycle: Continuous.

Coil Data @ 20°C - For Contact Style Series 4

Nominal Voltage (VDC)	Resistance ±10% (Ohms)	Nominal Coil Power (mW)
4.5	135	150
5	167	150
6	240	150
9	540	150
12	960	150
24	2,880	200
48	7,680	300

Coil Data @ 20°C - For Contact Style Series 5

Nominal Voltage (VDC)	Resistance ±10% (Ohms)	Nominal Coil Power (mW)
4.5	36	560
5	45	560
6	66	550
9	140	580
12	280	510
24	1,070	540
48	4,000	580

Operate Data @ 20°C

Must Operate Voltage: 70% of nominal voltage or less.

Must Release Voltage: 5% of nominal voltage or more.

Operate Time (Excluding Bounce)†: 6 ms, max.

Release Time (Excluding Bounce)†: 3 ms, max.

Operate Bounce: 3 ms, max.

Release Bounce: 4 ms, max.

† At or from Nominal Coil Voltage.

Environmental Data

Temperature Range: -30°C to +80°C, for contact style series 4.
-40°C to +60°C, for contact style series 5.

Vibration, Operational: 10g, 10-55 Hz.

Shock, Operational: 10g for 11 ms, 1/2 sine wave.

Shock, Non-destructive: 100g for 6 ms, 1/2 sine wave.

Mechanical Data

Termination: DIP compatible, printed circuit terminals.

Enclosure: Sealed PBT plastic case.

Weight: 0.16 oz. (4.5g) approximately.

Ordering Information


Typical Part Number ▶	T85	N	11	D	11	4	-12
1. Basic Series: T85 = Ultra sensitive, DIP PC board relay.							
2. Enclosure: N = Sealed plastic case.							
3. Contact Arrangement: 11 = 2 Form C (DPDT)							
4. Coil Input: D = DC voltage.							
5. Terminals: 11 = Printed circuit terminals.							
6. Contact Style and Material: 4 = Bifurcated, silver-palladium (gold overlay on stationary), 1.25A max. 5 = Bifurcated, silver-nickel (gold overlay on stationary and moveable), 2A max.							
7. Coil Voltage:							
04 = 4.5VDC	06 = 6VDC	12 = 12VDC	48 = 48VDC				
05 = 5VDC	09 = 9VDC	24 = 24VDC					

For new designs refer to V23105.


Stock Items – The following items are normally maintained in stock for immediate delivery.

T85N11D114-05	T85N11D114-48	T85N11D115-24
T85N11D114-12	T85N11D115-05	
T85N11D114-24	T85N11D115-12	

Outline Dimensions

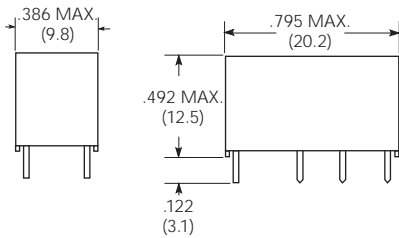

Wiring Diagrams (Bottom Views)



PC Board Layout (Bottom View)

