

| Parameter                            | Rating | Units              |
|--------------------------------------|--------|--------------------|
| Blocking Voltage                     | 600    | $V_P$              |
| Load Current, $T_A=25^\circ\text{C}$ | 3.5    | $A_{\text{rms}}$   |
| With $5^\circ\text{C/W}$ Heat Sink   |        |                    |
| No Heat Sink                         | 1.4    |                    |
| On-resistance                        | 0.75   | $\Omega$           |
| $R_{\theta\text{JC}}$                | 0.3    | $^\circ\text{C/W}$ |


### Features

- Compact ISOPLUS-264 Power Package
- Low Thermal Resistance ( $0.3^\circ\text{C/W}$ )
- $3.5A_{\text{rms}}$  Load Current with  $5^\circ\text{C/W}$  Heat Sink
- Electrically Non-conductive Thermal Pad for Heat Sink Applications
- Low Drive Power Requirements
- Arc-Free With No Snubbing Circuits
- $2500V_{\text{rms}}$  Input/Output Isolation
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable

### Applications

- Industrial Controls
- Motor Control
- Robotics
- Medical Equipment—Patient/Equipment Isolation
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- Transportation Equipment
- Aerospace/Defense

### Pin Configuration



### Description

Clare and IXYS have combined to bring OptoMOS® technology, reliability and compact size to a new family of high power Solid State Relays.

As part of this family, the CPC1979 single pole normally open (1-Form-A) Solid State Power Relay is rated for up to  $3.5A_{\text{rms}}$  continuous load current with a  $5^\circ\text{C/W}$  heat sink.

The CPC1979 employs optically coupled MOSFET technology to provide  $2500V_{\text{rms}}$  of input to output isolation. The output is constructed with efficient MOSFET switches and photovoltaic die that use Clare's patented OptoMOS architecture while the input, a highly efficient GaAIAs infrared LED provides the optically coupled control. The combination of low on-resistance and high load current handling capability makes this relay suitable for a variety of high performance switching applications.

The unique ISOPLUS-264 package pioneered by IXYS allows Solid State Relays to achieve the highest load current and power ratings. This package features a unique IXYS process where the silicon chips are soft soldered onto the Direct Copper Bond (DCB) substrate instead of the traditional copper leadframe. The DCB ceramic, the same substrate used in high power modules, not only provides  $2500V_{\text{rms}}$  isolation but also very low thermal resistance ( $0.3^\circ\text{C/W}$ ).


### Approvals

- UL 508 Recognized Component: File # E69938

### Ordering Information

| Part Number | Description               |
|-------------|---------------------------|
| CPC1979J    | ISOPLUS-264 (25 per tube) |

### Switching Characteristics of Normally Open (Form A) Devices



## Absolute Maximum Ratings

| Parameter                         | Ratings     | Units            |
|-----------------------------------|-------------|------------------|
| Blocking Voltage                  | 600         | V <sub>P</sub>   |
| Reverse Input Voltage             | 5           | V                |
| Input Control Current             | 100         | mA               |
| Peak (10ms)                       | 1           | A                |
| Input Power Dissipation           | 150         | mW               |
| Isolation voltage Input to Output | 2500        | V <sub>rms</sub> |
| Operational Temperature           | -40 to +85  | °C               |
| Storage Temperature               | -40 to +125 | °C               |

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

Electrical absolute maximum ratings are at 25°C

## Electrical Characteristics

| Parameter  | Conditions                                | Symbol             | Min | Typ  | Max  | Units            |
|--|---|--------------------|-----|------|------|------------------|
| <b>Output Characteristics</b> <span style="float: right;"><b>T<sub>A</sub>=25°C</b></span> |   |                    |     |      |      |                  |
| Load Current <sup>1</sup>  |   |                    |     |      |      |                  |
| Peak   | t ≤ 10ms                                  | I <sub>L</sub>     | -   | -    | 20   | A <sub>p</sub>   |
| Continuous   | No Heat Sink                              |                    |     |      | 1.4  | A <sub>rms</sub> |
| Continuous   | T <sub>C</sub> =25°C                      | 14.5               |     |      |      |                  |
| Continuous   | T <sub>C</sub> =99°C                      | I <sub>L(99)</sub> | 1.7 |      |      |                  |
| On-Resistance <sup>2</sup>   | I <sub>F</sub> =10mA, I <sub>L</sub> =1A  | R <sub>ON</sub>    | -   | 0.59 | 0.75 | Ω                |
| Off-State Leakage Current  | V <sub>L</sub> =600V                      | I <sub>LEAK</sub>  | -   | -    | 1    | μA               |
| Switching Speeds   |   |                    |     |      |      |                  |
| Turn-On  | I <sub>F</sub> =20mA, V <sub>L</sub> =10V | T <sub>ON</sub>    | -   | 8    | 25   | ms               |
| Turn-Off   |   | T <sub>OFF</sub>   | -   | 0.2  | 5    |                  |
| Output Capacitance   | V=25V, f=1MHz                             | C <sub>OUT</sub>   | -   | 700  | -    | pF               |
| <b>Input Characteristics</b> <span style="float: right;"><b>T<sub>A</sub>=25°C</b></span>  |   |                    |     |      |      |                  |
| Input Control Current <sup>3</sup>   | I <sub>L</sub> =1A                        | I <sub>F</sub>     | -   | -    | 10   | mA               |
| Input Dropout Current  | -   | I <sub>F</sub>     | 0.6 | -    | -    | mA               |
| Input Voltage Drop   | I <sub>F</sub> =5mA                       | V <sub>F</sub>     | 0.9 | 1.2  | 1.4  | V                |
| Reverse Input Current  | V <sub>R</sub> =5V                        | I <sub>R</sub>     | -   | -    | 10   | μA               |
| <b>Common Characteristics</b> <span style="float: right;"><b>T<sub>A</sub>=25°C</b></span> |   |                    |     |      |      |                  |
| Capacitance Input to Output  | -   | C <sub>IO</sub>    | -   | 1    | -    | pF               |

<sup>1</sup> Higher load currents are possible with proper heat sinking.

<sup>2</sup> Measurement taken within 1 second of on time.

<sup>3</sup> For applications requiring high temperature operation (greater than 60°C) an LED drive current of 20mA is recommended.

## Thermal Characteristics

| Parameter                                | Conditions | Symbol          | Min | Typ | Max | Units |
|--|------------|-----------------|-----|-----|-----|-------|
| Thermal Resistance (junction to case)    | -          | $R_{\theta JC}$ | -   | -   | 0.3 | °C/W  |
| Thermal Resistance (junction to ambient) | free air   | $R_{\theta JA}$ | -   | 33  | -   | °C/W  |
| Junction Temperature (operation)         | -          | $T_J$           | -40 | -   | 100 | °C    |

## Thermal Management

Device high current characterization was performed using Kunze heat sink KU 1-159, phase change thermal interface material KU-ALC 5, and transistor clip KU 4-499/1. This combination provided an approximate junction-to-ambient thermal resistance of 12.5°C/W.

## Heat Sink Calculation

Higher load currents are possible by using lower thermal resistance heat sink combinations.

### Heat Sink Rating

$$R_{\theta CA} = \frac{(T_J - T_A) I_{L(99)}^2}{I_L^2 \cdot P_{D(99)}} - R_{\theta JC}$$

$T_J$  = Junction Temperature (°C),  $T_J \leq 100^\circ\text{C}$  \*

$T_A$  = Ambient Temperature (°C)

$I_{L(99)}$  = Load Current with Case Temperature @ 99°C ( $A_{DC}$ )

$I_L$  = Desired Operating Load Current ( $A_{DC}$ ),  $I_L \leq I_{L(MAX)}$













$R_{\theta JC}$  = Thermal Resistance, Junction to Case (°C/W) = 0.3°C/W

$R_{\theta CA}$  = Thermal Resistance of Heat Sink & Thermal Interface Material, Case to Ambient (°C/W)

$P_{D(99)}$  = Maximum power dissipation with case temperature held at 99°C = 3.33W

\* Elevated junction temperature reduces semiconductor lifetime.

PERFORMANCE DATA\*

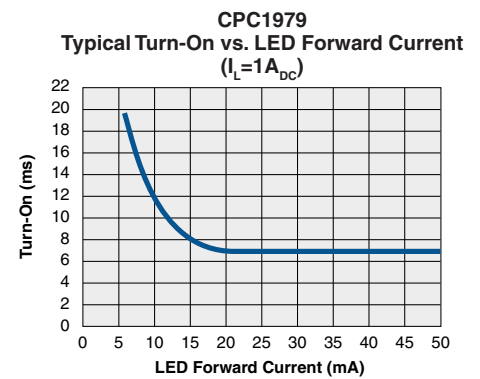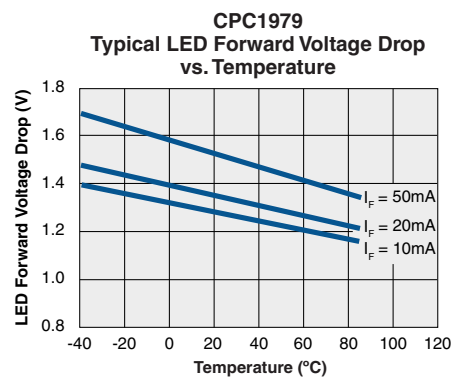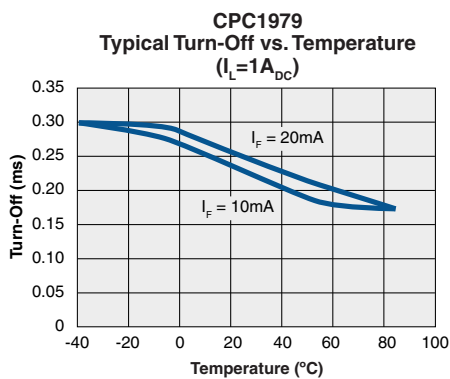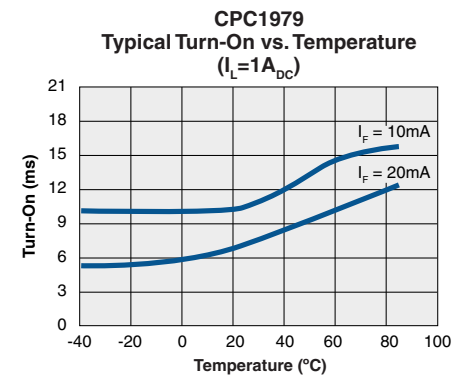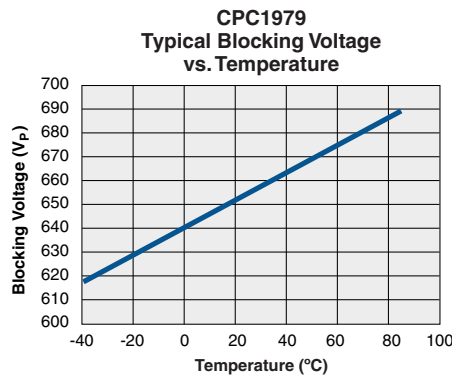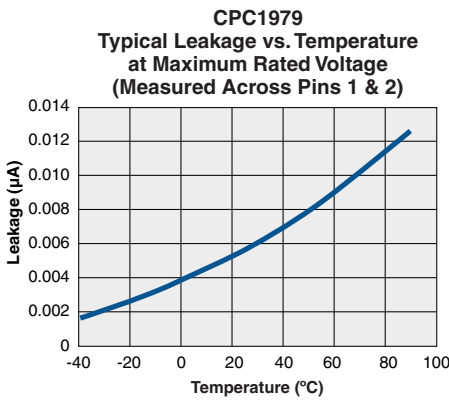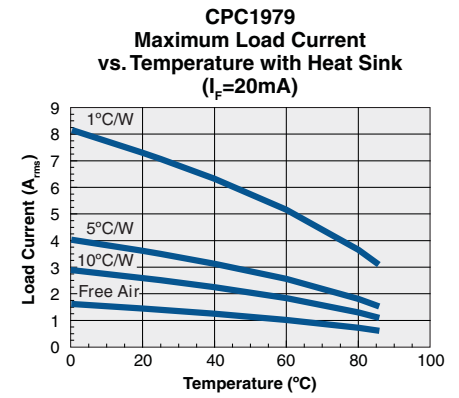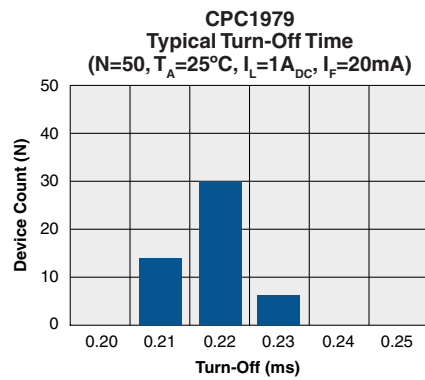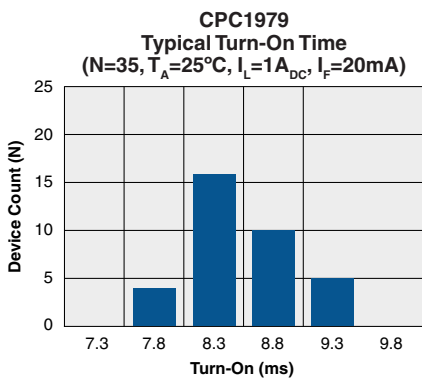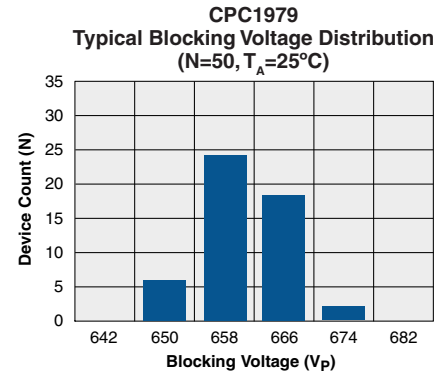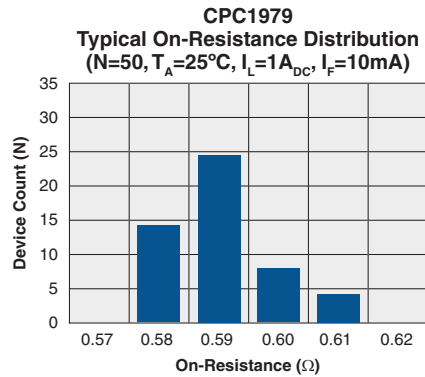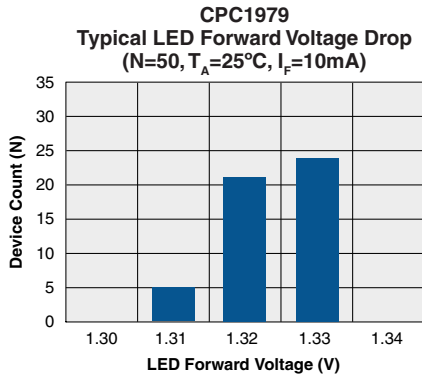


Unless otherwise specified, all performance data was acquired without the use of a heat sink.


\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

**PERFORMANCE DATA\***


**CPC1979**  
Typical Turn-Off vs. LED Forward Current  
( $I_L = 1A_{DC}$ )

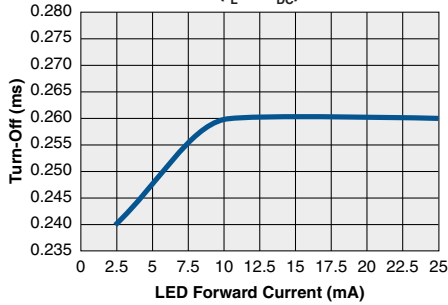


**CPC1979**  
Typical On-Resistance vs. Temperature  
( $I_L = \text{max rated}$ )

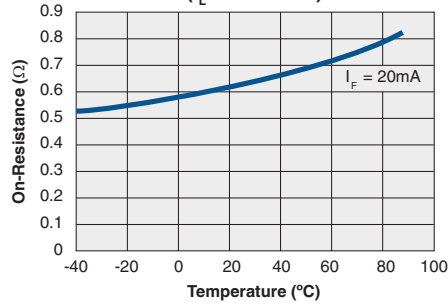


**CPC1979**  
Typical  $I_F$  for Switch Operation  
vs. Temperature  
( $I_L = 1A_{DC}$ )

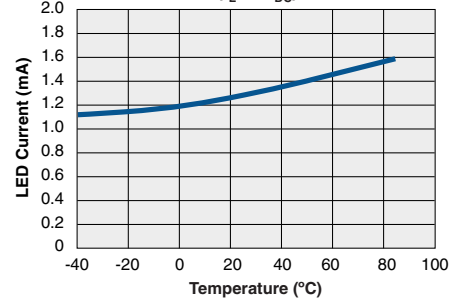

**CPC1979**  
Typical Load Current vs. Load Voltage  
( $T_A = 25^\circ\text{C}$ ,  $I_F = 10\text{mA}$ )

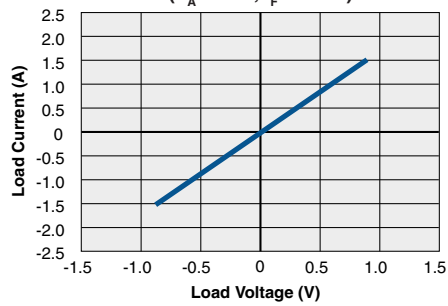

**CPC1979**  
Energy Rating Curve  
(Free Air, No Heat Sink)

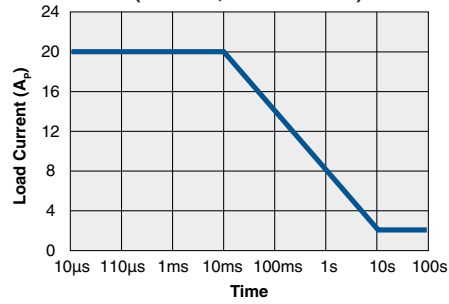

Unless otherwise specified, all performance data was acquired without the use of a heat sink.

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## MANUFACTURING INFORMATION

### Soldering

For proper assembly, the component must be processed in accordance with the current revision of IPC/JEDEC standard J-STD-020. Failure to follow the recommended guidelines may cause permanent damage to the device resulting in impaired performance and/or a reduced lifetime expectancy.


### Washing

Clare does not recommend ultrasonic cleaning or the use of chlorinated solvents.



## MECHANICAL DIMENSIONS:

### ISOPLUS-264 Package

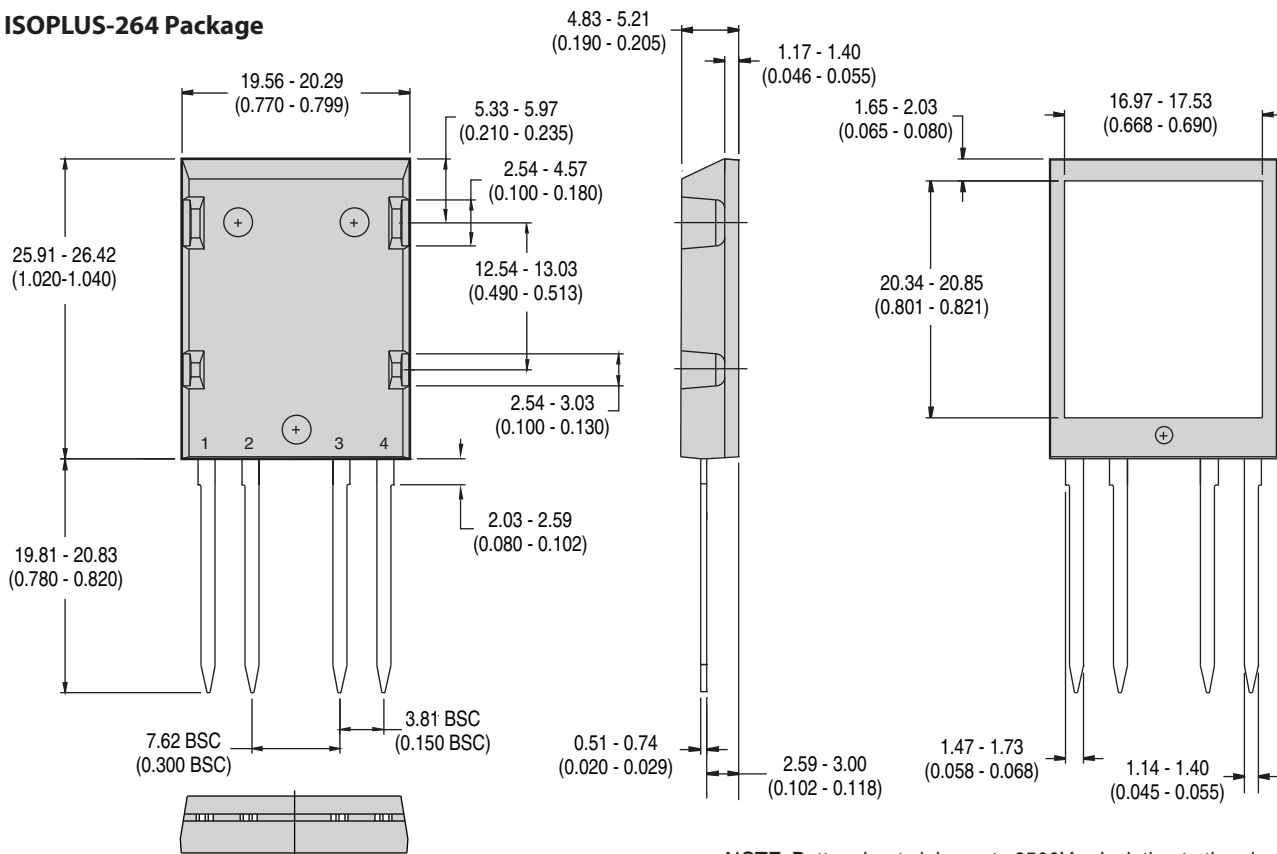

NOTE: Bottom heat sink meets 2500V<sub>rms</sub> isolation to the pins.

DIMENSIONS  
MIN - MAX mm  
(MIN - MAX inches)

### For additional information please visit our website at: [www.clare.com](http://www.clare.com)

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.

Specification: DS-CPC1979-R05  
©Copyright 2008, Clare, Inc.  
OptoMOS® is a registered trademark of Clare, Inc.  
ISOPLUS™ is a trademark of IXYS Corporation  
All rights reserved. Printed in USA.  
7/18/08