


Series 3R/3T – General Purpose Probes

- ▶ Metallic Rods
- ▶ Available in Many Materials for Various Requirements
- ▶ Adaptable for Various Fittings

For general purpose use, Series 3R probes are metallic rods with threaded ends that screw into a fitting that extends vertically down into the liquid. Available in a variety of materials for different applications. 3T tapered rods are also available.

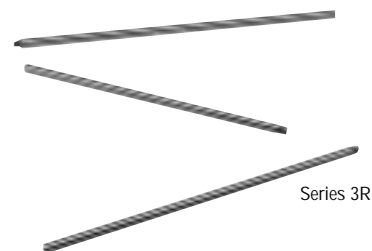

Specifications

| | |
|-----------------------------|---|
| Style | |
| Series 3R | 1/4" (.64 cm) threaded rod |
| Series 3T | 1/4" (.64 cm) tapered rod |
| Material | Brass, Hastelloy B, Hastelloy C, Monel, 316 stainless steel, titanium, Carp. 20 |
| Sheathing (optional) | PVC heat shrink (200°F), Teflon® heat shrink (350°F) |

How to Order

Use the **Bold** characters from the chart below to construct a product code.

| | | | | |
|--------------------------------|------------------------|-----------------|----------|----------|
| Series | 3R | X | X | X |
| 3R | 3T | | | |
| Length (Feet) | | | | |
| 1 – One | 5 – Five | 9 – Nine | | |
| 2 – Two | 6 – Six | 10 – Ten | | |
| 3 – Three | 7 – Seven | | | |
| 4 – Four | 8 – Eight | | | |
| Probe Material | | | | |
| A – Brass | F – Hastelloy C | | | |
| C – 316 Stainless Steel | G – Monel | | | |
| D – Carp. 20 | H – Titanium | | | |
| E – Hastelloy B | | | | |
| Sheathing Heat Shrink | | | | |
| 0 – None | | | | |
| 4 – PVC | | | | |
| 5 – Teflon® | | | | |

Standard part numbers

Contact your representative for custom lengths.

Note: Long lengths can be coupled to facilitate shipping and installation.

Applications

- General Purpose Immersion (3R)
- For use with Series 3E, 3F, 3G, 3B fittings

Dimensions

