

### Features

- 4.2V to 28V DC Operation Voltage
- Temperature Compensation
- Wide Operating Voltage Range
- Open Drain Pre-Driver
- 25mA Maximum Sinking Output Current
- Lead Free Packages: SIP3 (Note 1) and SC59 (Commonly known as SOT23 in Asia)
- SC59: Available in "Green" Molding Compound (No Br, Sb)
- Lead Free Finish/RoHS Compliant (Note 2)


### General Description

AH337 is a switched Hall-Effect IC that is for contactless switching applications. The device includes an on-chip Hall voltage generator for magnetic sensing, an amplifier that amplifies the Hall voltage, a Schmitt trigger to provide switching hysteresis for noise rejection, and an open-collector output. The band-gap regulator allows a wide operating voltage range. If a magnetic flux density larger than threshold Bop, DO is turned on (low). The output state is held until a magnetic flux density reversal falls below Brp causing DO to be turned off (high).

### Applications

- VCD/DVD Loader, CD/DVD ROM
- Cover Detector
- Speed Measurement
- Home Appliances
- Home Safety

### Ordering Information

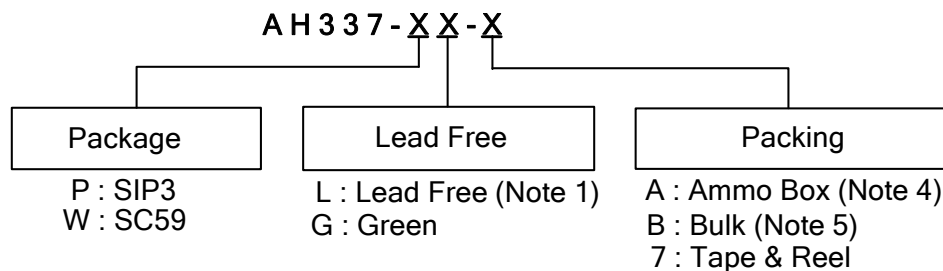

	Package Code	Packaging (Note 3)	Bulk		7" Tape and Reel		Ammo Box	
			Quantity	Part Number Suffix	Quantity	Part Number Suffix	Quantity	Part Number Suffix
AH337-PL-A	P	SIP3	NA	NA	NA	NA	4000/Box	-A
AH337-PL-B	P	SIP3	1000	-B	NA	NA	NA	NA
AH337-WL-7	W	SC59	NA	NA	3000/Tape & Reel	-7	NA	NA
AH337-WG-7	W	SC59	NA	NA	3000/Tape & Reel	-7	NA	NA




- Notes:
1. SIP3 is available in "Lead Free" product only.
  2. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied, see *EU Directive 2002/95/EC Annex Notes*.
  3. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
  4. Ammo Box is for SIP3 Spread Lead.
  5. Bulk is for SIP3 Straight Lead.

**Pin Assignments**


(1) SIP3

(2) SC59

( Top View )

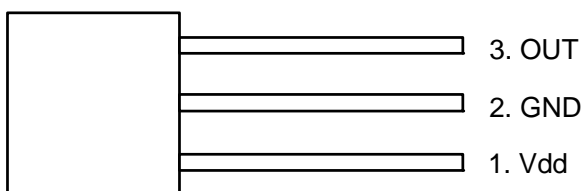


( Top View )

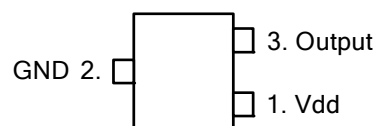


**Pin Descriptions**

Name	P/I/O	Pin #	Description
Vdd	P	1	Positive Power Supply
GND	P	2	Ground
OUT	O	3	Output Pin

**Block Diagram**

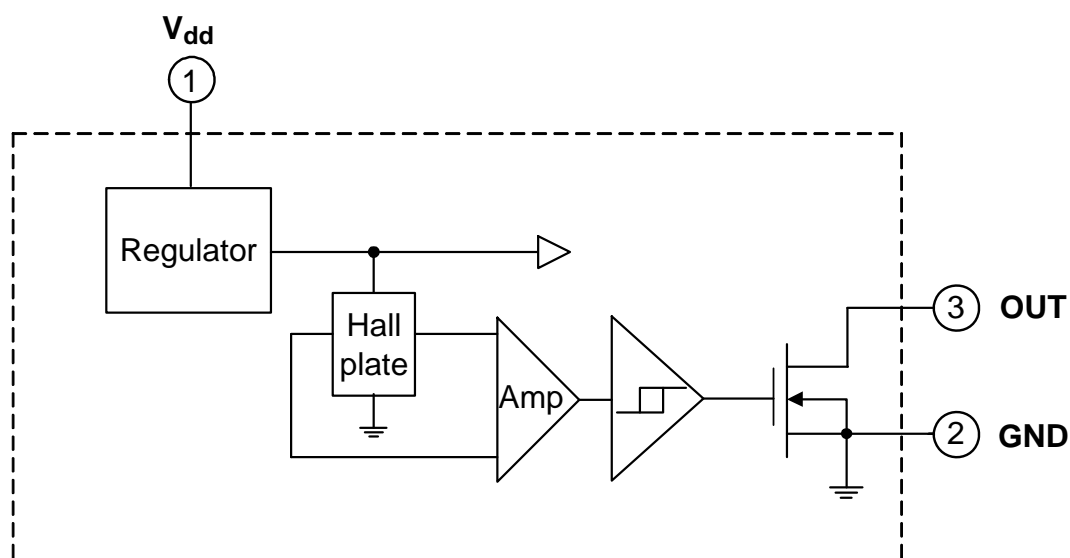

**Typical Application Circuit**

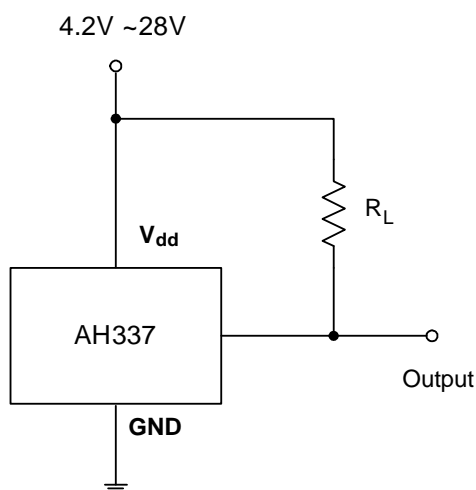

**Absolute Maximum Ratings** ( $T_A = 25^\circ\text{C}$ )

Symbol	Characteristics		Values	Unit
V <sub>dd</sub>	Supply Voltage		30	V
B	Magnetic Flux Density		Unlimited	
V <sub>DS</sub>	Output OFF Voltage		30	V
I <sub>d</sub>	Output "ON" Current	Continuous	25	mA
T <sub>ST</sub>	Storage Temperature Range		-65~+150	°C
T <sub>J(MAX)</sub>	Maximum Junction Temperature		150	°C
P <sub>D</sub>	Package Power Dissipation	SIP3	550	mW
		SC59	230	mW

**Recommended Operating Conditions**

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>dd</sub>	Supply Voltage (Note 6)	Operating	4.2	28	V
T <sub>A</sub>	Operating Ambient Temperature	Operating	-40	125	°C

Note: 6. The output of IC will be switched after the supply voltage is over 4.2V, but the magnetic characteristics won't be normal until the supply is over 4.5V.

### Electrical Characteristics ( $T_A = +25^\circ\text{C}$ , $V_{dd} = 12\text{V}$ )


Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
$V_{DS(SAT)}$	Output Saturation Voltage	$I_{out} = 10\text{mA}$ , $B > B_{op}$	-	300	400	mV
$I_{off}$	Output Leakage Current	$B < B_{rp}$	-	< 0.1	10	$\mu\text{A}$
$I_{dd}$	Supply Current	Output Open	-	2	4	mA

### Magnetic Characteristics ( $T_A = 25^\circ\text{C}$ , $V_{dd} = 4.5\text{V to } 28\text{V}$ )

(1mT = 10 Gauss)

Symbol	Parameter	Min	Typ.	Max	Unit
Bops(south pole to brand side)	Operation Point	90	120	150	Gauss
Brps(south pole to brand side)	Release Point	30	60	90	Gauss
$B_{hy}( B_{opx} - B_{rpx} )$	Hysteresis	-	60	-	Gauss


### Operating Characteristics

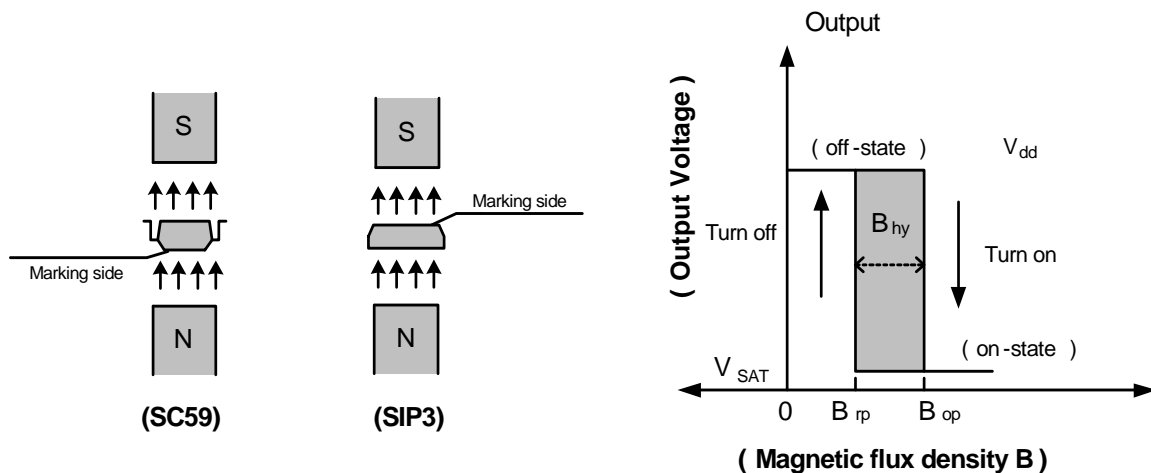

**Performance Characteristics**


**(1) SIP3**

<b>T<sub>A</sub> (°C)</b>	<b>25</b>	<b>50</b>	<b>60</b>	<b>70</b>	<b>80</b>	<b>85</b>	<b>90</b>	<b>95</b>	<b>100</b>
P <sub>D</sub> (mW)	550	440	396	352	308	286	264	242	220
<b>T<sub>A</sub> (°C)</b>	<b>105</b>	<b>110</b>	<b>115</b>	<b>120</b>	<b>125</b>	<b>130</b>	<b>135</b>	<b>140</b>	<b>150</b>
P <sub>D</sub> (mW)	198	176	154	132	110	88	66	44	0

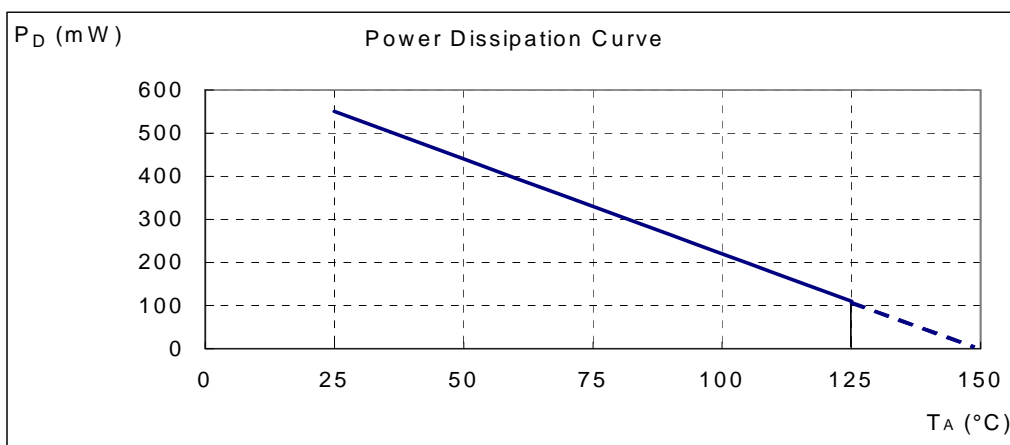

**(2) SC59 (Commonly known as SOT23 in Asia)**


<b>T<sub>A</sub> (°C)</b>	<b>25</b>	<b>50</b>	<b>60</b>	<b>70</b>	<b>80</b>	<b>90</b>	<b>100</b>	<b>110</b>	<b>120</b>	<b>125</b>	<b>130</b>	<b>140</b>	<b>150</b>
P <sub>D</sub> (mW)	230	184	166	147	129	110	92	74	55	46	37	18	0

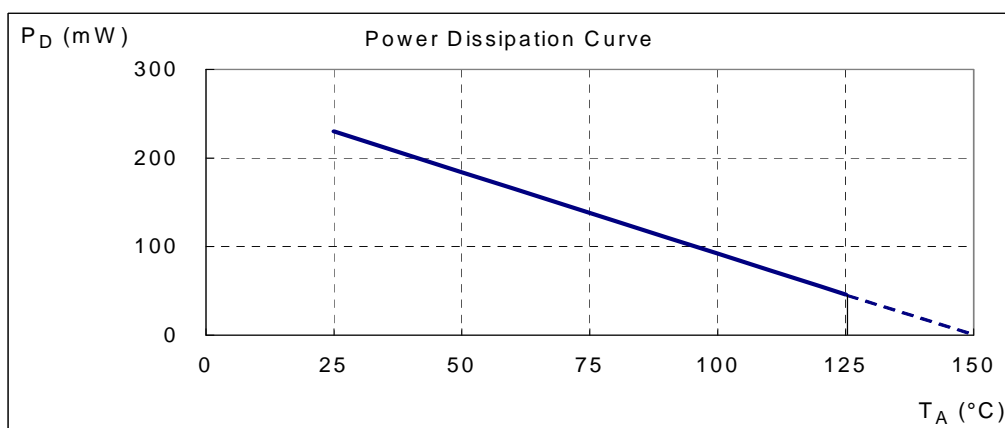

**Marking Information**

(1) SIP3


( Top View )



Y : Year : "7" = 2007  
"8" = 2008  
WW : Nth Week 01~52  
X : Internal code  
a~z : Lead Free

(2) SC59 (Commonly known as SOT23 in Asia)

( Top View )




XX : P1 : AH337  
Y : Year 0~9  
M : Month A~L  
X : Internal code  
a~z : Lead Free  
A~Z : Green


Part Number	Package	Identification Code
AH337	SC59	P1

**Package Information** (All Dimensions in mm)

(1) Package Type: SIP3 for Bulk only

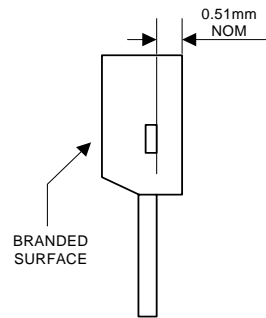


Active Area Depth

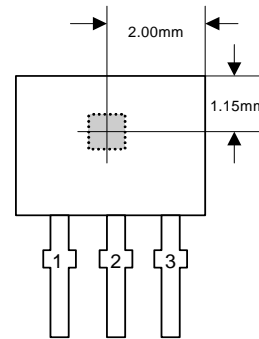


Sensor Location

**Package Dimension**

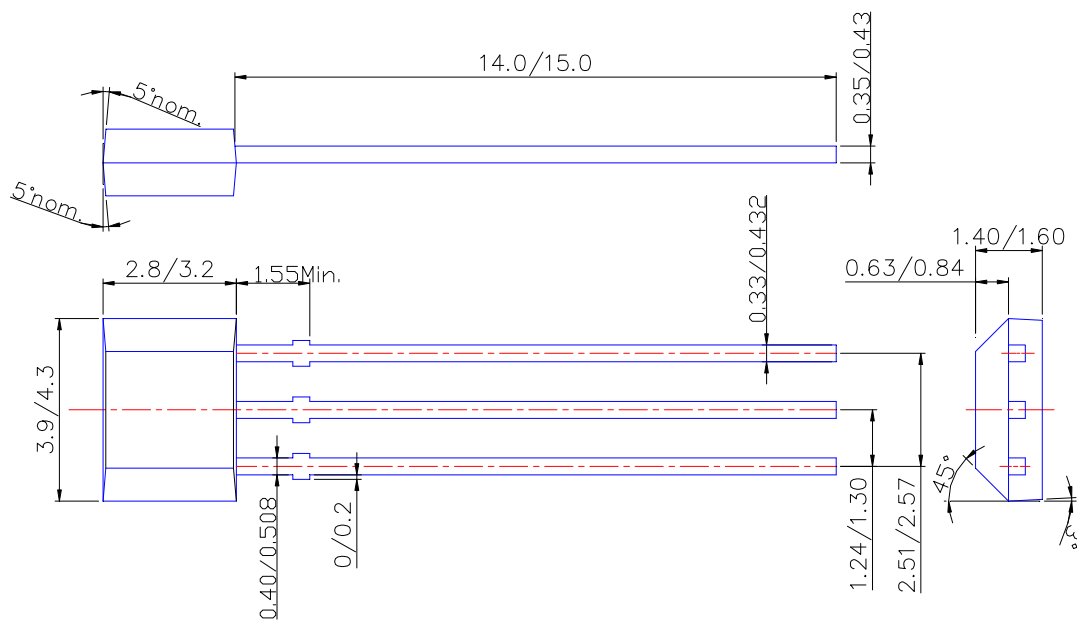


**Package Information (Continued)**

**(2) Package Type: SIP3 for Ammo Pack-only**

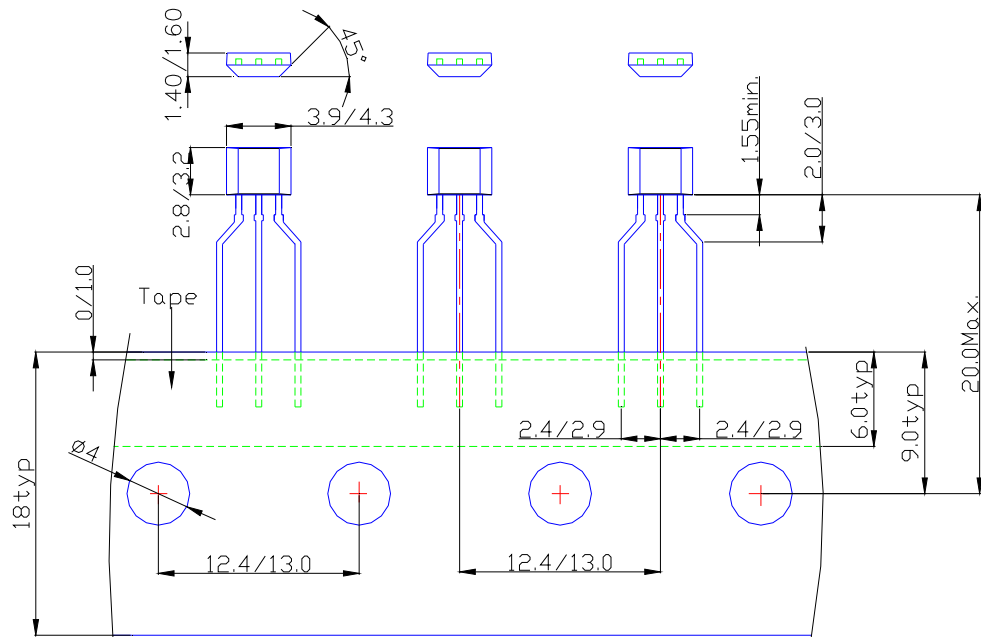

**(3) SC59 (Commonly known as SOT23 in Asia)**

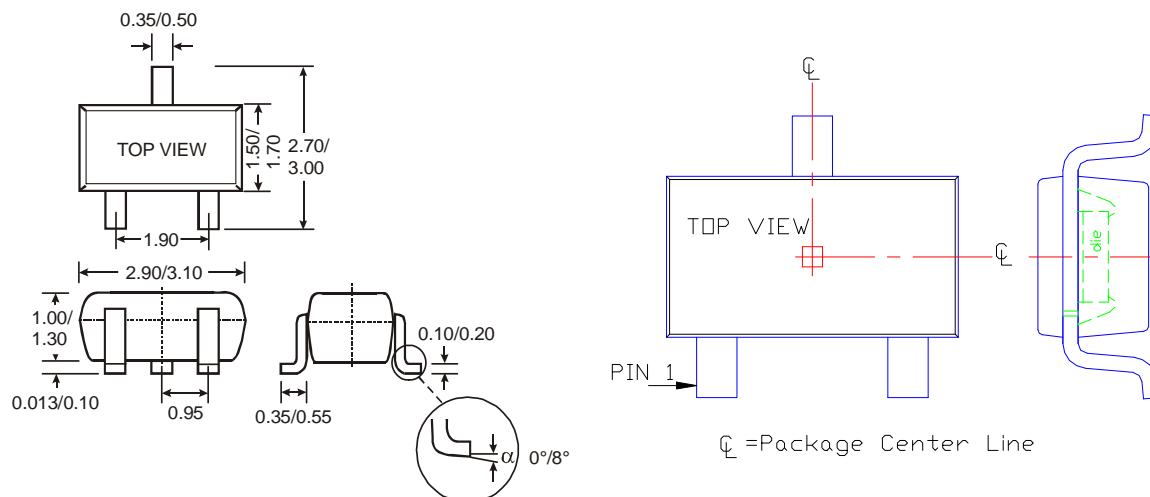



**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.