

13 New Fibers Offer High-Flexibility for Robotic, Reciprocating, and Moving Machinery

- All cables withstand constant flexing for robotic arms in automated assembly and material handling equipment
- Select from 11 models with 1 mm bending radius that allow 90° bends with little or no reduction in light transmission
- Fibers with 1 mm bending radius conform to contours or profiles of machinery, ensuring a perfect fit in tight applications
- Even the chemical-resistant and heat-resistant fibers have a minimum bending radius of only 10 mm



Ordering Information

■ Features

Application	Features	Sensing method	Part number
Robotic applications with constant flexing and little installation space at the sensing site	1 mm minimum bending radius, 3 mm dia. sensing head, nickel-plated brass sensing head (E32-T12R, E32-D22R), stainless steel sensing head (E32-D12R), and 2 m cable length	Through-beam	E32-T12R
		Diffuse	E32-D22R
			E32-D12R
Space-constrained robotic applications that require side-view sensing	1 mm minimum bending radius, 1 mm dia. sensing head (E32-T24R), 2 mm dia. sensing head (E32-D24R), 3 mm dia. sensing head (E32-T14LR), 6 mm dia. sensing head (E32-D14LR)	Through-beam	E32-T14LR
			E32-T24R
		Diffuse	E32-D14LR
			E32-D24R
Harsh environment applications requiring flexible, chemical and high-temperature resistant fibers	10 mm minimum bending radius, Teflon® sheath (E32-T81F), or Fluorocarbon resin (E32-T81R), protects cable and sensing head from chemicals, solvents and oil, withstands -40°C to 200°C; 6 mm diameter sensing head (E32-T81F), M4 threaded head (E32-T81R), glass core	Through-beam	E32-T81F
			E32-T81R
Applications that involve constant flexing and require wide sensing area, where objects are sensed when coming in random positions anywhere within the sensor's wide beam	1 mm minimum bending radius, wide beam head 30 mm sensing area (E32-T16WR), 11 mm side-view sensing area (E32-T16JR), 11 mm sensing area (E32-T16PR)	Through-beam	E32-T16WR
			E32-T16JR
			E32-T16PR
Robotic applications with constant flexing that require thin fiber for minute object detection	1 mm minimum bending radius, 2 mm dia. sensing head, stainless steel sensing head, 2 m cable length	Through-beam	E32-T22R

Note: Teflon® is a registered trademark of the Dupont company and the Mitsui Dupont Chemical for their fluorine resin.

Sensing Distance with Fiber-Optic Cables

■ Through-Beam Fibers

- *Standard object* measurements were made with the E3X-DA-N and the E3X-NA set to Standard mode. The size of the standard object is the same as the fiber core diameter or the lens diameter for models with a lens.
- *Minimum sensing object* is shown in parentheses below the standard object (using the same column in the following table). For the E3X-DAN, minimum sensing object size was determined when it received light that exceeded a light incident value of 1000 (set to digital incident level display).
- The ✂ indicates models that customers can cut to length for their application. Models without this mark are pre-cut by the factory to maintain their respective specifications.

The table specifies the sensing characteristics of each fiber when used with the following amplifiers:

Legend:

DA-HS: E3X-DA-N (Digital amplifier - high speed mode)

DA-LD: E3X-DA-N (Digital amplifier - long distance mode)





DA-SM: E3X-DA-N (Digital amplifier - standard distance mode)

NA□(V): E3X-NA□(V)









NAG□: E3X-NAG□

NA□F: E3X-NA□F

Through-Beam, General Purpose Type

Application	Features	Appearance	Type	Detection distance Note: Values in () are when using the E39-F1 Lens Unit.	Standard object Note: Values in () are minimum detectable object: opaque.	Part number
Constant flexing	1 mm minimum bending radius, 2 m cable length ✂		DA-LD	670 mm (4,000 mm)	1.0 mm dia. (0.01 mm dia.)	E32-T12R
			DA-SM	530 mm (3,700 mm)		
			DA-HS	200 mm (1,400 mm)		
			NA□(V)	280 mm (2,100 mm)	1.0 mm dia. (0.03 mm dia.)	
			NAG□	50 mm (375 mm)	1.0 mm dia. (0.2 mm dia.)	
			NA□F	80 mm (600 mm)		
Thin fiber, minute object detection, constant flexing	1 mm minimum bending radius, 2 m cable length ✂		DA-LD	150 mm	0.5 mm dia. (0.01 mm dia.)	E32-T22R
			DA-SM	130 mm		
			DA-HS	50 mm		
			NA□(V)	60 mm	0.5 mm dia. (0.03 mm dia.)	
			NA□F	18 mm	0.5 mm dia. (0.1 mm dia.)	
Space-constrained, constant flexing, side-view sensing	Side-view sensing, 1 mm minimum bending radius ✂		DA-LD	270 mm	1.0 mm dia. (0.01 mm dia.)	E32-T14LR
			DA-SM	210 mm		
			DA-HS	90 mm		
			NA□(V)	110 mm	1.0 mm dia. (0.03 mm dia.)	
			NA□F	33 mm	1.0 mm dia. (0.2 mm dia.)	
Minute object detection, side-view sensing, constant flexing	Side-view sensing, 1 mm minimum bending radius ✂		DA-LD	60 mm	0.5 mm dia. (0.01 mm dia.)	E32-T24R
			DA-SM	50 mm		
			DA-HS	25 mm		
			NA□(V)	30 mm	0.5 mm dia. (0.03 mm dia.)	
			NA□F	9 mm		

Through-Beam, Special-Purpose Fibers

Application	Features	Appearance	Type	Detection distance	Standard object Note: Values in () are minimum detectable object: opaque.	Part number
Chemical-/heat-resistant	10 mm minimum bending radius, Teflon® sheath protects cable and sensing head from chemicals, solvents and oil, withstands -40°C to 200°C		DA-LD	880 mm	1.0 mm dia. (0.2 mm dia.)	E32-T81F
			DA-SM	700 mm		
			DA-HS	260 mm		
			NA□(V)	350 mm	1.0 mm dia. (0.2 mm dia.)	
			NA□F	100 mm	1.0 mm dia. (0.5 mm dia.)	
	10 mm minimum bending radius, fluorine resin sheath protects cable from chemicals, withstands -40°C to 200°C		DA-LD	350 mm	1.0 mm dia. (0.01 mm dia.)	E32-T81R
			DA-SM	280 mm		
			DA-HS	100 mm		
			NA□(V)	180 mm	1.0 mm dia. (0.2 mm dia.)	
			NA□F	50 mm	1.5 mm dia. (0.5 mm dia.)	
Area Sensing	1 mm minimum bending radius, 30 mm sensing area 		DA-LD	2,300 mm	0.3 mm dia. (*1)	E32-T16WR
			DA-SM	1,800 mm		
			DA-HS	660 mm		
			NA□(V)	690 mm	0.5 mm dia. (*2)	
			NA□F	200 mm	4.0 mm dia. (*2)	
	1 mm minimum bending radius, 11 mm sensing area, side-view sensing 		DA-LD	980 mm	0.2 mm dia. (*1)	E32-T16JR
			DA-SM	750 mm		
			DA-HS	210 mm		
			NA□(V)	390 mm	0.3 mm dia. (*2)	
			NA□F	110 mm	2.0 mm dia. (*2)	
	1 mm minimum bending radius, 11 mm sensing area 		DA-LD	1,050 mm	0.2 mm dia. (*1)	E32-T16PR
			DA-SM	840 mm		
			DA-HS	320 mm		
			NA□(V)	450 mm	0.3 mm dia. (*2)	
			NA□F	130 mm	2.0 mm dia. (*2)	

*1 These values were obtained when the sensing distance was set at 300 mm. Values for the diameter of the sensing object were obtained when the object was in a stationary state.

*2 These values were obtained when the sensing distance was set at 100 mm. Values for the diameter of the sensing object were obtained when the object was in a stationary state.

Sensing Distance with Fiber-Optic Cables

■ Diffuse Fibers

- *Standard object* measurements were made with the E3X-DA-N and the E3X-NA set to Standard mode. The size of standard object is the same as the fiber core diameter or the lens diameter for models with a lens.
- *Minimum sensing object* is shown in parentheses below the standard object (using the same column in the table below). The values of the minimum sensing object size were obtained at a distance where the smallest object (gold wire) can be sensed with the Diffuse Fiber unit.
- The ✂ indicates models that customers can cut to length for their application. Models without this mark are pre-cut by the factory to maintain their respective specifications.

The table specifies the sensing characteristics of each fiber when used with the following amplifiers:

Legend:

DA-HS: E3X-DA-N (Digital amplifier - high speed mode)





DA-LD: E3X-DA-N (Digital amplifier - long distance mode)

DA-SM: E3X-DA-N (Digital amplifier - standard distance mode)

NA□(V): E3X-NA□(V)

NAG□: E3X-NAG□

NA□F: E3X-NA□F

Application	Features	Appearance	Type	Detection distance	Standard object Note: Values in () are when min. detectable object is opaque.	Part number
Constant flexing and little installation space	1 mm minimum bending radius, 3 mm dia. sensing head, 2 m cable length ✂	 3-mm dia.	DA-LD	220 mm	300 x 300 mm (0.01 mm dia.)	E32-D12R
			DA-SM	170 mm		
			DA-HS	80 mm	150 x 150 mm (0.01 mm dia.)	
			NA□(V)	90 mm		
			NAG□	15 mm	25 x 25 mm (0.1 mm dia.)	
			NA□F	30 mm		
Constant flexing and little installation space	1 mm minimum bending radius, 3 mm dia. sensing head, thin fibers ✂	 3-mm dia.	DA-LD	40 mm	50 x 50 mm (0.01 mm dia.)	E32-D22R
			DA-SM	30 mm		
			DA-HS	10 mm	25 x 25 mm (0.01 mm dia.)	
			NA□(V)	15 mm		
			NA□F	5 mm	25 x 25 mm (0.03 mm dia.)	
Constant flexing and side-view sensing	1 mm minimum bending radius, 6 mm dia. sensing head ✂	 6-mm dia.	DA-LD	60 mm	100 x 100 mm (0.01 mm dia.)	E32-D14LR
			DA-SM	45 mm		
			DA-HS	25 mm	25 x 25 mm (0.03 mm dia.)	
			NA□(V)	16 mm		
	1 mm minimum bending radius, 2 mm diameter sensing head ✂	 2-mm dia.	DA-LD	25 mm	50 x 50 mm (0.01 mm dia.)	E32-D24R
			DA-SM	15 mm		
			DA-HS	6 mm	25 x 25 mm (0.03 mm dia.)	
			NA□(V)	7 mm		
NA□F	2.3 mm					

Specifications

Through-Beam Fiber-Optic Cables

Part number	Ambient operating temperature	Relative operating humidity	Permissible bending radius	Core material	Sheath material	Enclosure rating
E32-T12R	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP67
E32-T14LR	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP67
E32-T16JR	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP50
E32-T16PR	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP50
E32-T16WR	-25°C to 55°C (-13°F to 131°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP50
E32-T22R	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Polyethylene	IP67
E32-T24R	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Polyethylene	IP67
E32-T81F	-40°C to 200°C (-40°F to 392°F)	35% to 85% RH	10 mm	Glass	Teflon®	IP67
E32-T81R	-40°C to 200°C (-40°F to 392°F)	35% to 85% RH	10 mm	Glass	Fluorine resin	IP67

Diffuse Fiber-Optic Cables

Part number	Ambient operating temperature	Relative operating humidity	Permissible bending radius	Core material	Sheath material	Enclosure rating
E32-D12R	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP67
E32-D14LR	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Vinyl chloride copolymer	IP67
E32-D22R	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Polyethylene	IP67
E32-D24R	-40°C to 70°C (-40°F to 158°F)	35% to 85% RH	1 mm	PMMA	Polyethylene	IP67

Dimensions


Unit: mm (unless noted)

Note: The ✂ indicates models that customers can cut to length for their application.


Through-Beam Fibers

Through-Beam, General Purpose Type


E32-T12R ✂

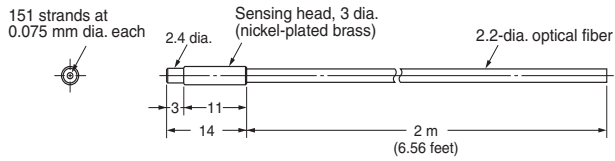


E32-T22R ✂

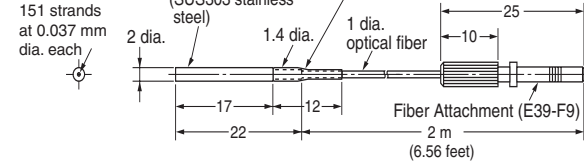

E32-T14LR ✂

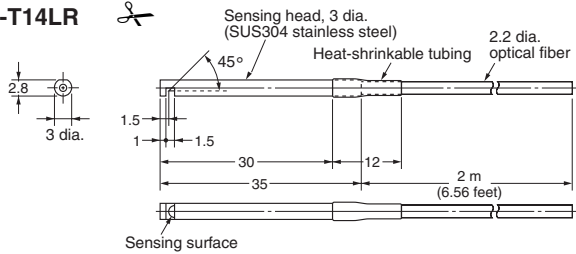


E32-T24R ✂

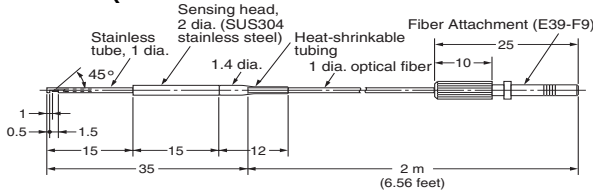

Through-Beam, Special Purpose Fibers


E32-T81F

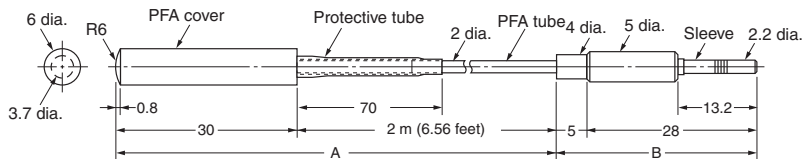

Note: Section A resists 200°C and section B resists 110°C.

*This model is pre-cut at the factory.

E32-T81R

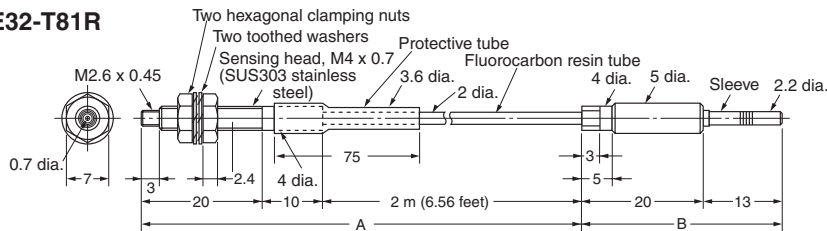


Note: Section A resists 200°C and section B resists 110°C.


*This model is pre-cut at the factory.

Through-Beam, Special-Purpose Fibers (continued)

E32-T16JR ✂

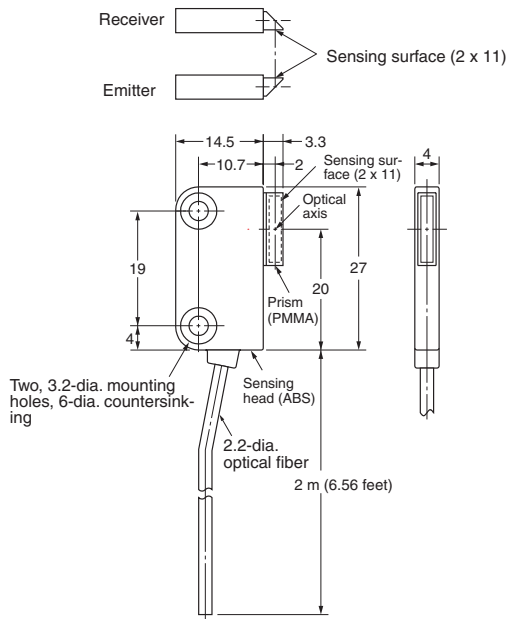


E32-T16PR ✂

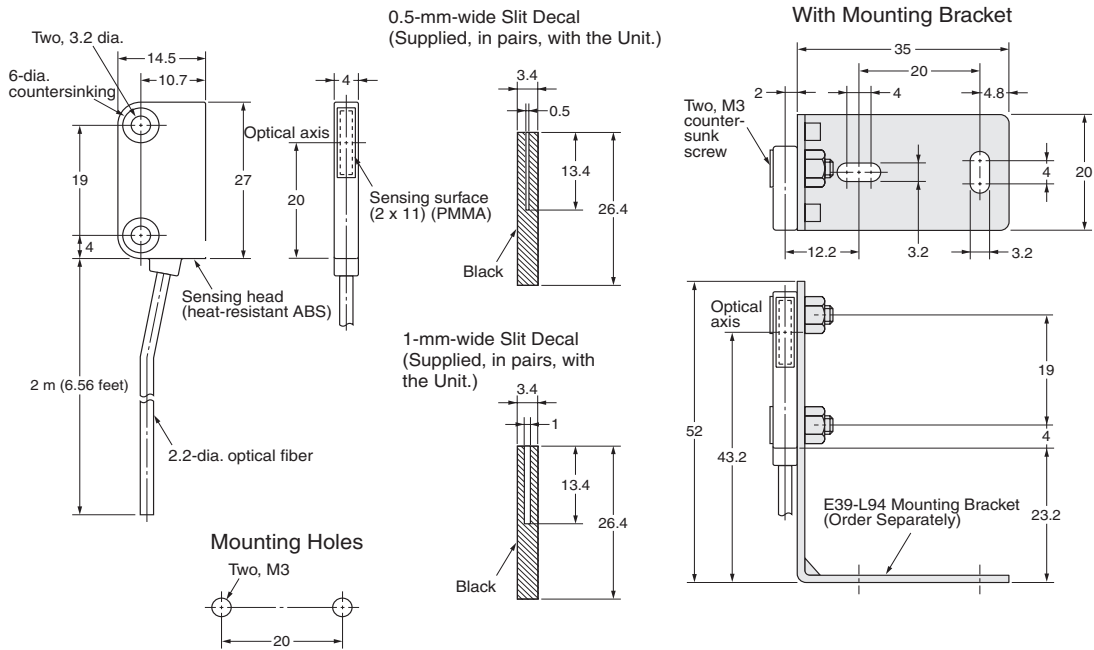


Unit: mm (unless noted)

■ Diffuse Fibers


E32-D12R ✂

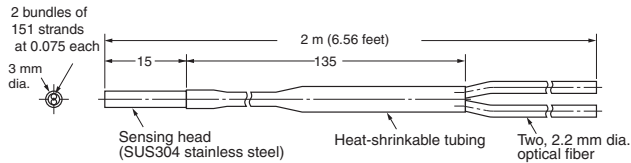


E32-D22R ✂

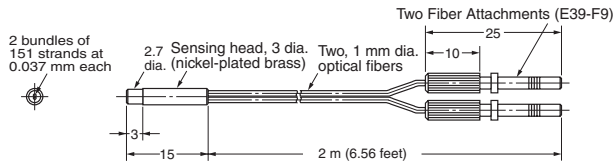

E32-D14LR ✂

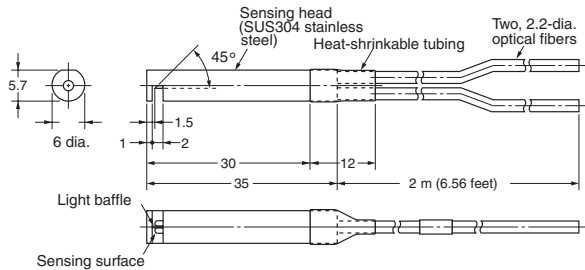

E32-D24R ✂

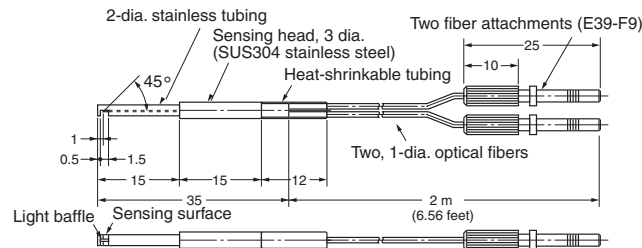

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON

OMRON ELECTRONICS LLC

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.omron.com/oei>
Canada - <http://www.omron.com/oci>

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8

416-286-6465