

## TEMPERATURE SENSOR IC

## FEATURES

- Linear Output Voltage 5 mV/°C Output
- 2.4 to 10.0 Volt Supply Range
- Miniature Package (SOT-25)
- Minimum External Parts Count
- Low Power Consumption

## APPLICATIONS

- Home and Industrial Thermostats
- Automotive Climate Control
- Battery Charger Temperature Monitor
- Notebook Computer Temperature Monitor
- Electronic Thermometers
- Fish Finder Water Temperature
- Industrial Process Controllers
- Home Appliance Temperature Control

## DESCRIPTION

The TK11043 is a temperature sensor IC with a linear output of 5 mV/°C over the range of -30 to + 105 °C. Its wide operating voltage range of 2.4 to 10.0 volts makes it suitable for a number of applications requiring accurate temperature control, such as electronic thermostats for climate control, refrigerators, and industrial process controls.

A typical application is to make a digital representation of temperature with an A/D converter, or to make a thermal detector with a comparator.

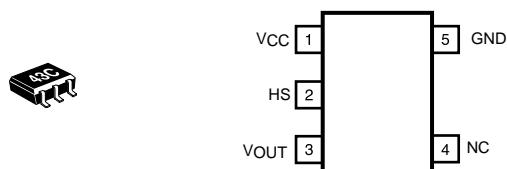
The TK11043 has a compensation pin for a 0.1  $\mu$ F capacitor that insures stability over the IC's operating temperature range.

The TK11043 is available in a miniature SOT-25 surface mount package.

## ORDERING INFORMATION

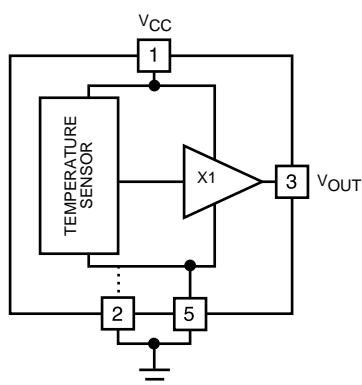
TK11043M-1    TAPE/REEL CODE  
TL: Tape Left

TK11043



Note: Connect pin 2 to GND

## BLOCK DIAGRAM



# TK11043

## ABSOLUTE MAXIMUM RATINGS

|                                  |             |                                   |                |
|----------------------------------|-------------|-----------------------------------|----------------|
| Supply Voltage .....             | 12 V        | Storage Temperature Range .....   | -55 to +150 °C |
| Operating Voltage .....          | 2.4 to 10 V | Operating Temperature Range ..... | -30 to +105 °C |
| Power Dissipation (Note 1) ..... | 150 mW      | Lead Soldering Temp. (10 s).....  | 235 °C         |
| Junction Temperature .....       | 150 °C      |                                   |                |

## TK11043 ELECTRICAL CHARACTERISTICS

Test Conditions:  $V_{CC} = 3.0 \text{ V}$ ,  $I_{OUT} = 0 \mu\text{A}$ ,  $T_A = 25 \text{ }^\circ\text{C}$ , unless otherwise specified.

| SYMBOL    | PARAMETER               | TEST CONDITIONS  | MIN   | TYP   | MAX   | UNITS                              |
|-----------|-------------------------|--|-------|-------|-------|------------------------------------|
| $V_{OUT}$ | Output Voltage          | $T_A = 25 \text{ }^\circ\text{C}$                                | 1.487 | 1.502 | 1.517 | V                                  |
|           |                         | $T_A = 85 \text{ }^\circ\text{C}$                                | 1.784 | 1.804 | 1.824 | V                                  |
|           |                         | $T_A = -30 \text{ }^\circ\text{C}$                               |       | 1.225 |       | V                                  |
| $T_c$     | Temperature Coefficient | $T_A = 25 \text{ }^\circ\text{C}$ to $85 \text{ }^\circ\text{C}$ | 4.50  | 5.04  | 5.50  | $\text{mV}/\text{ }^\circ\text{C}$ |
| Line Reg  | Line Regulation         | $V_{CC} = 3 \text{ V}$ to $10 \text{ V}$                         | -12   | 2     | +12   | mV                                 |
| Load Reg  | Load Regulation         | $I_{OUT} = 0 \mu\text{A}$ to $100 \mu\text{A}$                   | 0     | 2     | 12    | mV                                 |
| $I_{CC}$  | Supply Current          | $T_A = 25 \text{ }^\circ\text{C}$                                |       | 110   | 180   | $\mu\text{A}$                      |
| $I_{OUT}$ | Output Current          | $\Delta V_{OUT} \leq 15 \text{ mV}$                              |       |       | 400   | $\mu\text{A}$                      |

Note 1: Power dissipation is 150 mW when mounted as recommended. Derate at  $1.2 \text{ mW}/\text{ }^\circ\text{C}$  for operation above  $25 \text{ }^\circ\text{C}$ .

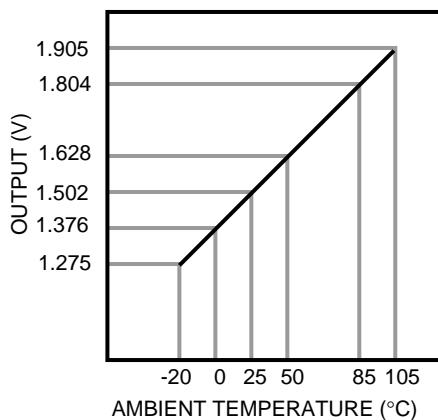
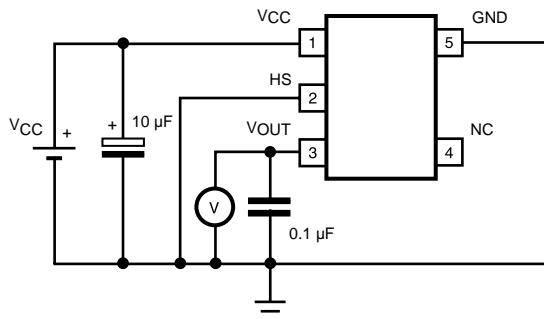


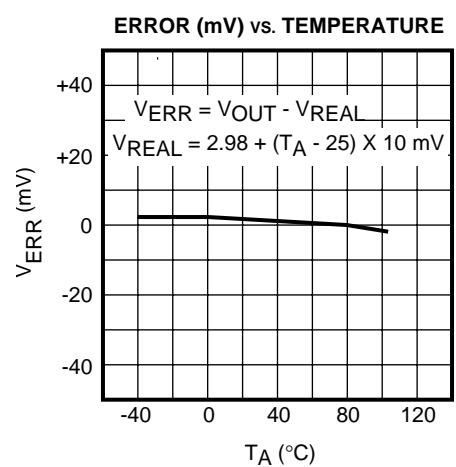
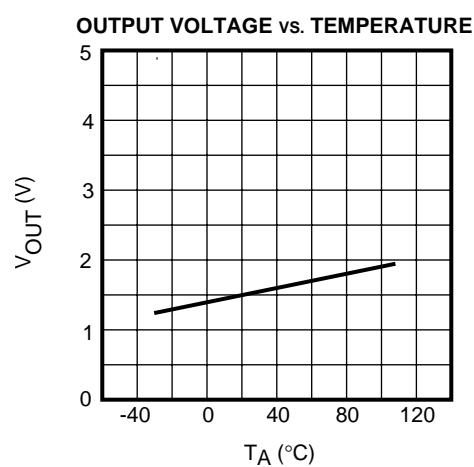
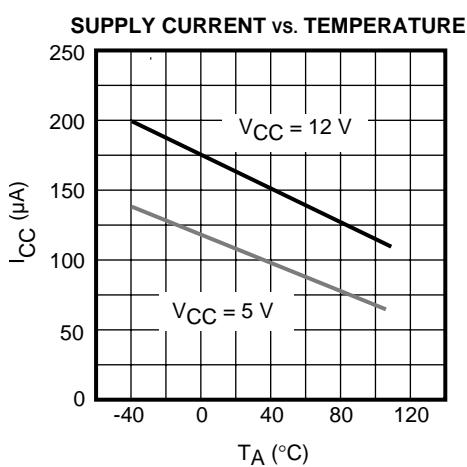
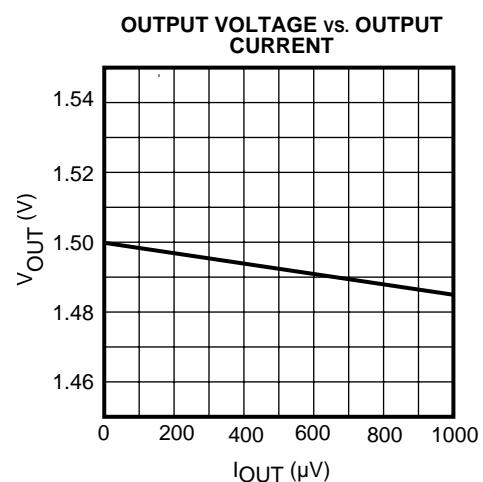
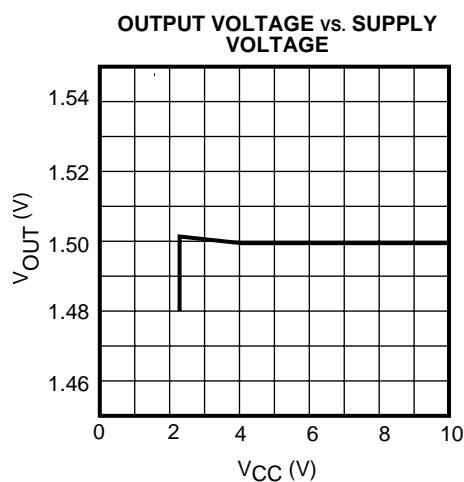
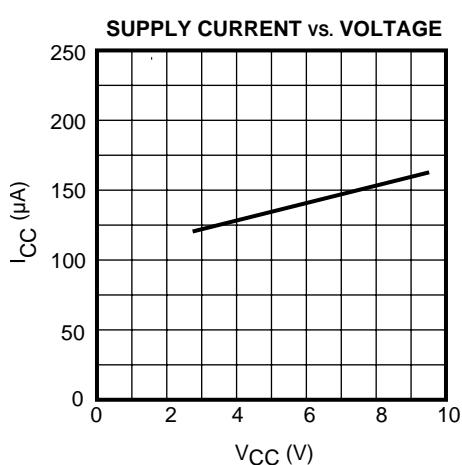
FIGURE 1. OUTPUT CHARACTERISTICS

## TEST CIRCUIT

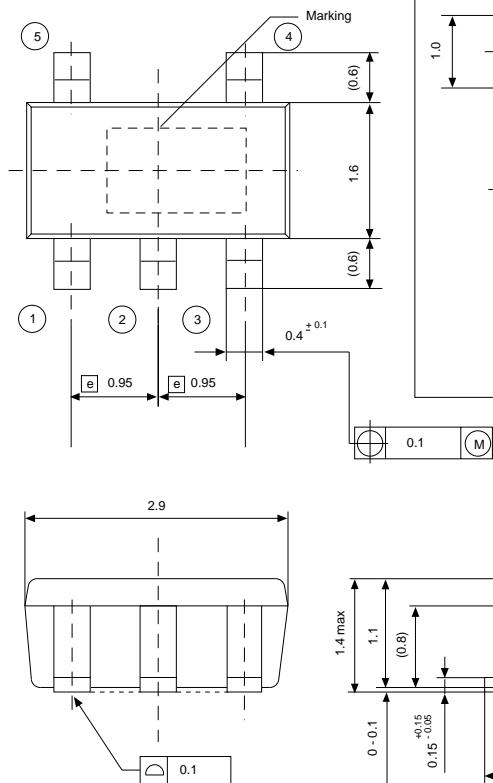


Connect pin 2 to ground

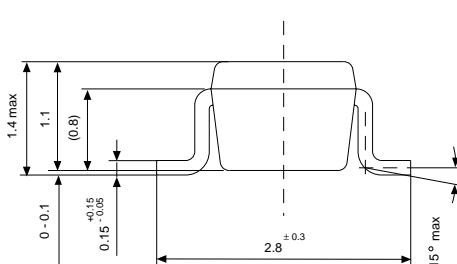
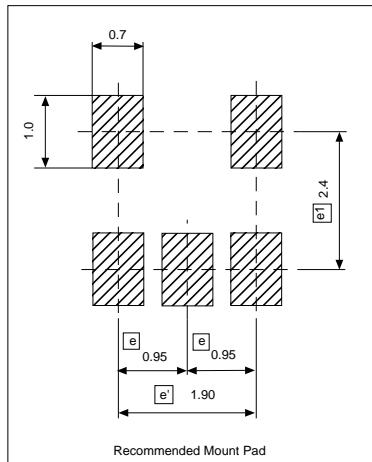
## TYPICAL PERFORMANCE CHARACTERISTICS

 $V_{CC} = 3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

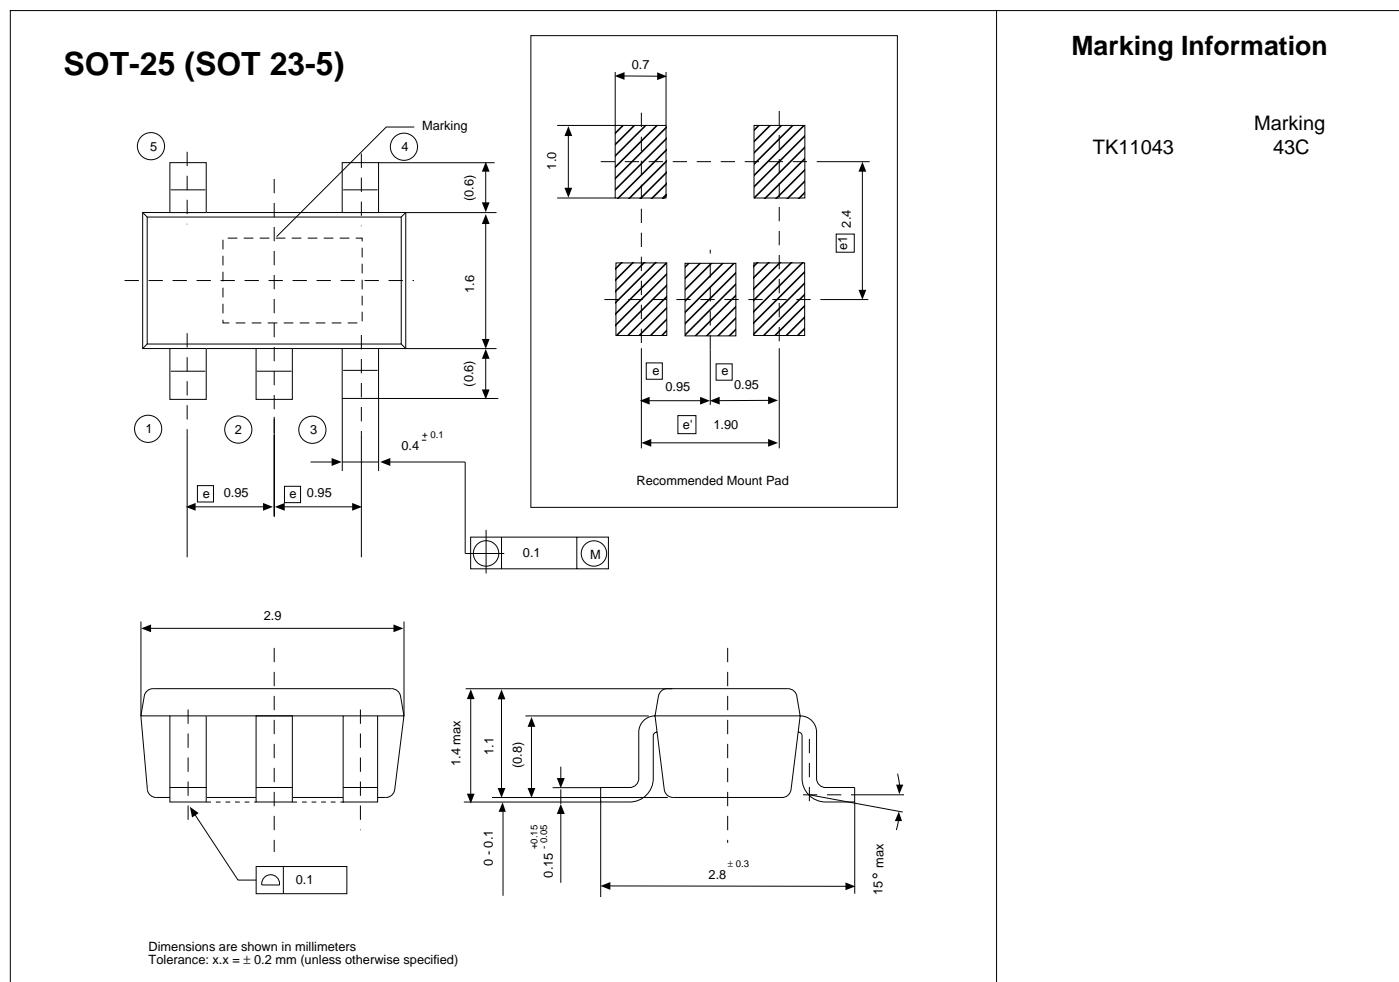
## PACKAGE OUTLINE

**SOT-25 (SOT 23-5)**

Dimensions are shown in millimeters  
Tolerance:  $x.x = \pm 0.2$  mm (unless otherwise specified)

**Marking Information**

Marking  
TK11043  
43C



The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.

**TOKO AMERICA REGIONAL OFFICES****Midwest Regional Office**

Toko America, Inc.  
1250 Feehanville Drive  
Mount Prospect, IL 60056  
Tel: (847) 297-0070  
Fax: (847) 699-7864

**Western Regional Office**

Toko America, Inc.  
2480 North First Street, Suite 260  
San Jose, CA 95131  
Tel: (408) 432-8281  
Fax: (408) 943-9790

**Eastern Regional Office**

Toko America, Inc.  
107 Mill Plain Road  
Danbury, CT 06811  
Tel: (203) 748-6871  
Fax: (203) 797-1223

**Semiconductor Technical Support**

Toko Design Center  
4755 Forge Road  
Colorado Springs, CO 80907  
Tel: (719) 528-2200  
Fax: (719) 528-2375