


- For infra-red reflow and vapor phase soldering.
- Gull wing terminals for max. strength and easy in-circuit test.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 110 use MM #1005 pins. See page 135 for details.
- Insulators are high temperature thermoplastic.



Total number of pins				Quantity per tube	<h2>Ordering Information</h2>
	A	B	C		

	A	B	C		
10	0.5	0.2	0.3	40	110-XX-210-41-105000
4	0.2	0.3	0.4	102	110-XX-304-41-105000
6	0.3	0.3	0.4	67	110-XX-306-41-105000
8	0.4	0.3	0.4	50	110-XX-308-41-105000
10	0.5	0.3	0.4	40	110-XX-310-41-105000
14	0.7	0.3	0.4	28	110-XX-314-41-105000
16	0.8	0.3	0.4	25	110-XX-316-41-105000
18	0.9	0.3	0.4	22	110-XX-318-41-105000
20	1.0	0.3	0.4	20	110-XX-320-41-105000
22	1.1	0.3	0.4	18	110-XX-322-41-105000
24	1.2	0.3	0.4	16	110-XX-324-41-105000
28	1.4	0.3	0.4	14	110-XX-328-41-105000
20	1.0	0.4	0.5	20	110-XX-420-41-105000
22	1.1	0.4	0.5	18	110-XX-422-41-105000
24	1.2	0.4	0.5	16	110-XX-424-41-105000
28	1.4	0.4	0.5	14	110-XX-428-41-105000
32	1.6	0.4	0.5	12	110-XX-432-41-105000
24	1.2	0.6	0.7	32	110-XX-624-41-105000
28	1.4	0.6	0.7	28	110-XX-628-41-105000
32	1.6	0.6	0.7	24	110-XX-632-41-105000
36	1.8	0.6	0.7	22	110-XX-636-41-105000
40	2.0	0.6	0.7	20	110-XX-640-41-105000
42	2.1	0.6	0.7	18	110-XX-642-41-105000
48	2.4	0.6	0.7	16	110-XX-648-41-105000
50	2.5	0.6	0.7	16	110-XX-650-41-105000
52	2.6	0.6	0.7	14	110-XX-652-41-105000
50	2.5	0.9	1.0	16	110-XX-950-41-105000
52	2.6	0.9	1.0	14	110-XX-952-41-105000
64	3.2	0.9	1.0	12	110-XX-964-41-105000

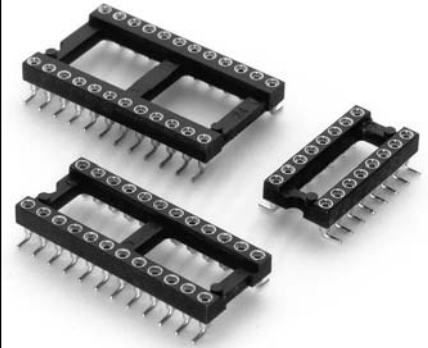

XX= Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	13◇		93		43◇	
Sleeve (Pin)	10μ" Au		200μ" Sn/Pb		200μ" Sn	
Contact (Clip)	30μ" Au		30μ" Au		30μ" Au	