


- Convenient way to load loose receptacles on a PC board.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 612 use MM #0132, #0135, #0255 or #8855 pins. See pages 134 and 140 for details.
- Insulators are high temperature thermoplastic.

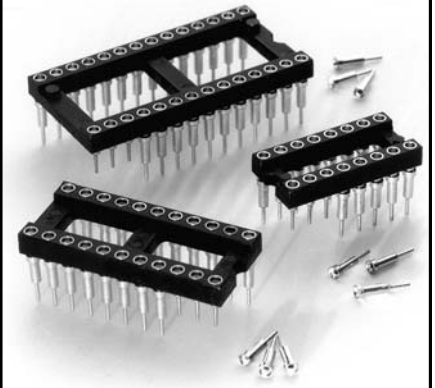

Total number of pins				Quantity per tube	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> XX=Plating Code See Below </div> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin-left: 20px;"> Ordering Information <i>For RoHS compliance select ◇ plating code.</i> </div> <div style="border: 1px solid green; padding: 5px; display: inline-block; margin-left: 20px; text-align: center;"> RoHS <small>2002/95/EC</small> </div>			
	A	B	C		Tail Length = .124 (.022 Min. Mounting Hole)	Tail Length = .144 (.022 Min. Mounting hole)	Tail Length = .183 (.022 Min. Mounting hole)	Tail Length = .273 (.022 Min. Mounting hole)
	10	0.5	0.2		0.3	40	612-XX-210-41-001000	612-XX-210-41-002000
4	0.2	0.3	0.4	102	612-XX-304-41-001000	612-XX-304-41-002000	612-XX-304-41-003000	612-XX-304-41-004000
6	0.3	0.3	0.4	68	612-XX-306-41-001000	612-XX-306-41-002000	612-XX-306-41-003000	612-XX-306-41-004000
8	0.4	0.3	0.4	50	612-XX-308-41-001000	612-XX-308-41-002000	612-XX-308-41-003000	612-XX-308-41-004000
10	0.5	0.3	0.4	40	612-XX-310-41-001000	612-XX-310-41-002000	612-XX-310-41-003000	612-XX-310-41-004000
14	0.7	0.3	0.4	28	612-XX-314-41-001000	612-XX-314-41-002000	612-XX-314-41-003000	612-XX-314-41-004000
16	0.8	0.3	0.4	25	612-XX-316-41-001000	612-XX-316-41-002000	612-XX-316-41-003000	612-XX-316-41-004000
18	0.9	0.3	0.4	22	612-XX-318-41-001000	612-XX-318-41-002000	612-XX-318-41-003000	612-XX-318-41-004000
20	1.0	0.3	0.4	20	612-XX-320-41-001000	612-XX-320-41-002000	612-XX-320-41-003000	612-XX-320-41-004000
22	1.1	0.3	0.4	18	612-XX-322-41-001000	612-XX-322-41-002000	612-XX-322-41-003000	612-XX-322-41-004000
24	1.2	0.3	0.4	16	612-XX-324-41-001000	612-XX-324-41-002000	612-XX-324-41-003000	612-XX-324-41-004000
28	1.4	0.3	0.4	14	612-XX-328-41-001000	612-XX-328-41-002000	612-XX-328-41-003000	612-XX-328-41-004000
20	1.0	0.4	0.5	20	612-XX-420-41-001000	612-XX-420-41-002000	612-XX-420-41-003000	612-XX-420-41-004000
22	1.1	0.4	0.5	18	612-XX-422-41-001000	612-XX-422-41-002000	612-XX-422-41-003000	612-XX-422-41-004000
24	1.2	0.4	0.5	16	612-XX-424-41-001000	612-XX-424-41-002000	612-XX-424-41-003000	612-XX-424-41-004000
28	1.4	0.4	0.5	14	612-XX-428-41-001000	612-XX-428-41-002000	612-XX-428-41-003000	612-XX-428-41-004000
32	1.6	0.4	0.5	12	612-XX-432-41-001000	612-XX-432-41-002000	612-XX-432-41-003000	612-XX-432-41-004000
24	1.2	0.6	0.7	16	612-XX-624-41-001000	612-XX-624-41-002000	612-XX-624-41-003000	612-XX-624-41-004000
28	1.4	0.6	0.7	14	612-XX-628-41-001000	612-XX-628-41-002000	612-XX-628-41-003000	612-XX-628-41-004000
32	1.6	0.6	0.7	12	612-XX-632-41-001000	612-XX-632-41-002000	612-XX-632-41-003000	612-XX-632-41-004000
36	1.8	0.6	0.7	11	612-XX-636-41-001000	612-XX-636-41-002000	612-XX-636-41-003000	612-XX-636-41-004000
40	2.0	0.6	0.7	10	612-XX-640-41-001000	612-XX-640-41-002000	612-XX-640-41-003000	612-XX-640-41-004000
42	2.1	0.6	0.7	9	612-XX-642-41-001000	612-XX-642-41-002000	612-XX-642-41-003000	612-XX-642-41-004000
48	2.4	0.6	0.7	8	612-XX-648-41-001000	612-XX-648-41-002000	612-XX-648-41-003000	612-XX-648-41-004000
50	2.5	0.6	0.7	8	612-XX-650-41-001000	612-XX-650-41-002000	612-XX-650-41-003000	612-XX-650-41-004000
52	2.6	0.6	0.7	7	612-XX-652-41-001000	612-XX-652-41-002000	612-XX-652-41-003000	612-XX-652-41-004000
50	2.5	0.9	1.0	8	612-XX-950-41-001000	612-XX-950-41-002000	612-XX-950-41-003000	612-XX-950-41-004000
52	2.6	0.9	1.0	7	612-XX-952-41-001000	612-XX-952-41-002000	612-XX-952-41-003000	612-XX-952-41-004000
64	3.2	0.9	1.0	6	612-XX-964-41-001000	612-XX-964-41-002000	612-XX-964-41-003000	612-XX-964-41-004000
SPECIFY PLATING CODE XX=					13 ◇	93	43 ◇	
Sleeve (Pin)					10μ Au	200μ Sn/Pb	200μ Sn	
Contact (Clip)					30μ Au	30μ Au	30μ Au	