


SECTION A-A
SCALE 10:1

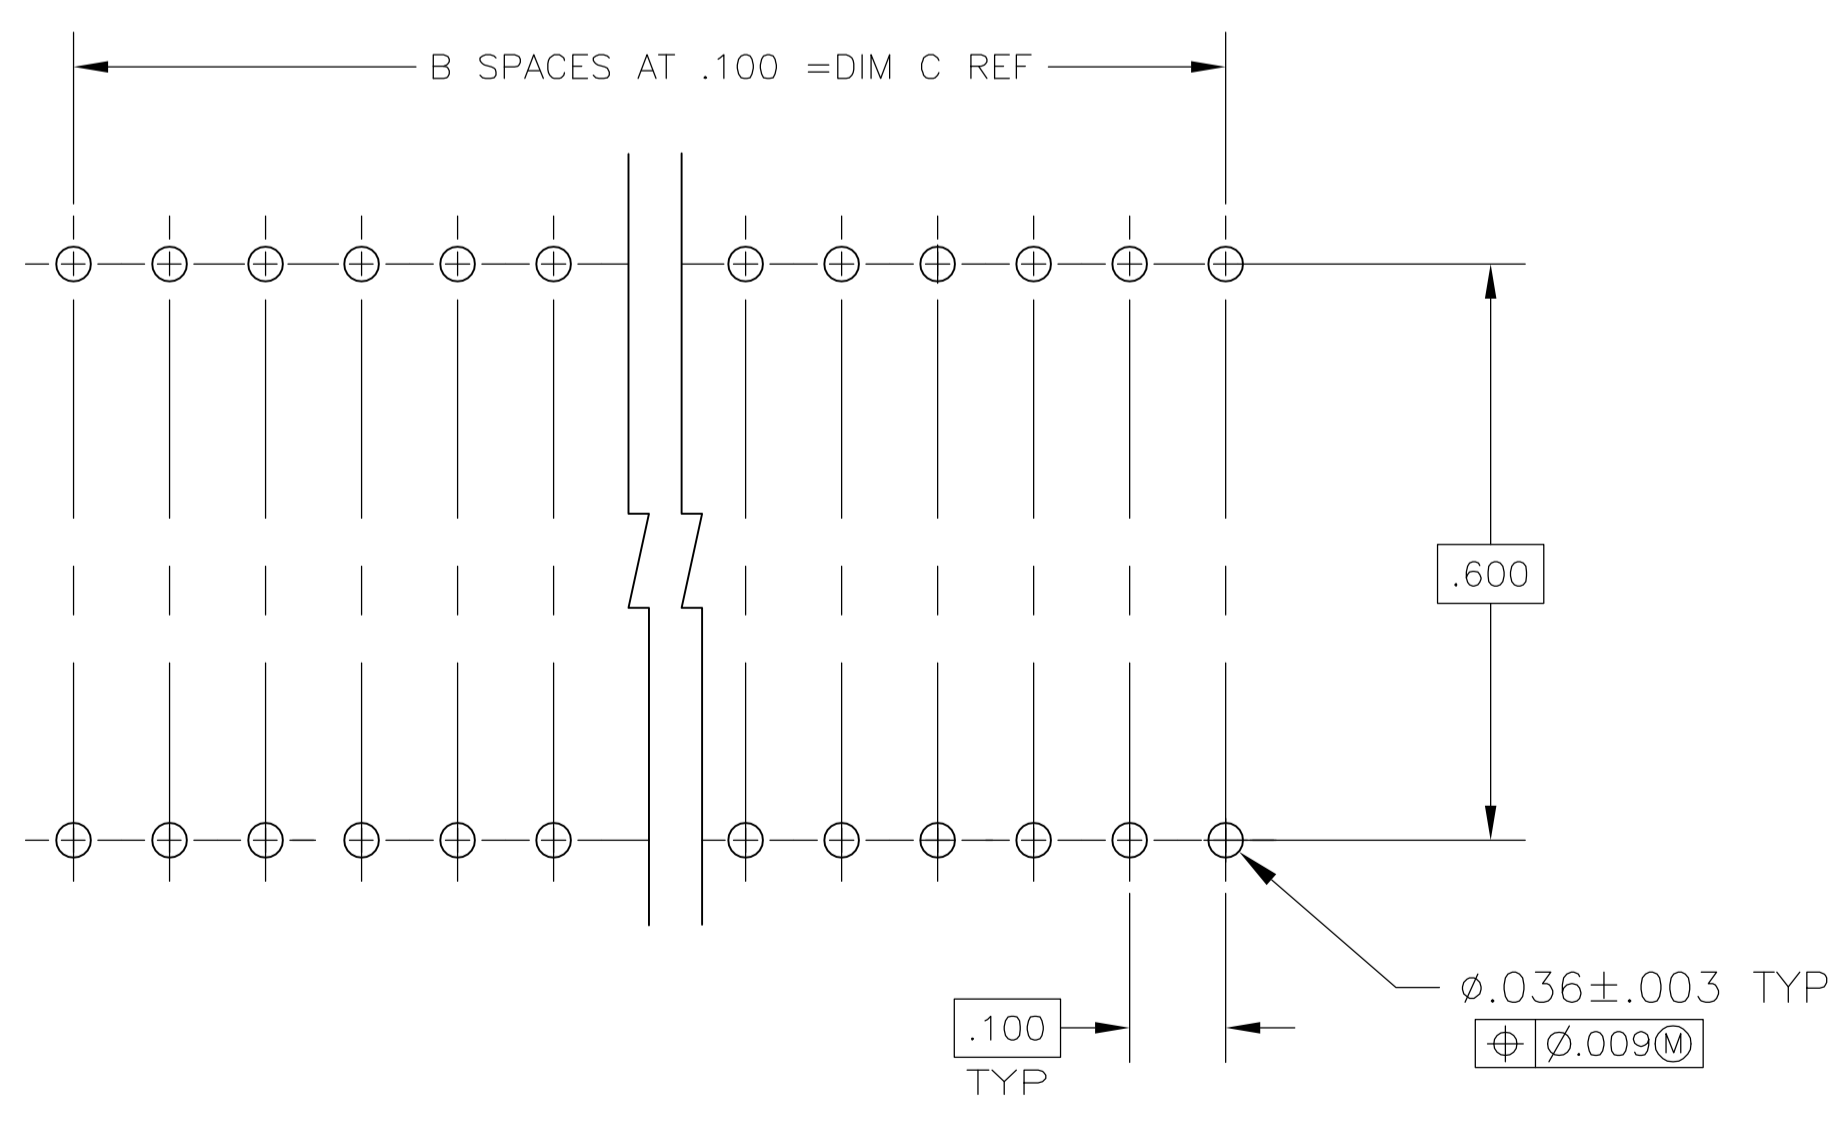

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

- 1 RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
- 2 TUBE LOADED FOR AUTOMATIC INSERTION.
- 3 BECU CONTACT - PLATED WITH TWO .000030 MIN THIK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 4 PHOS. BRZ CONTACT - PLATED WITH TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 5 GLASS FILLED THERMOPLASTIC, 94V-0, BLACK

3	2.300	23	2.395	48	1-1825376-4
3	1.900	19	1.995	40	1-1825376-3
3	1.300	13	1.395	28	1-1825376-2
3	1.100	11	1.195	24	1-1825376-1
4	2.300	23	2.395	48	1825376-4
4	1.900	19	1.995	40	1825376-3
4	1.300	13	1.395	28	1825376-2
4	1.100	11	1.195	24	1825376-1
CONTACT & FINISH	DIM C	B SPCS	DIM A	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN B.S.VISWESWARA 22APROS
 CHK K.WRIGHT
 APVD

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± .005
 4 PLC ± -
 ANGLES ± 0.30°

MATERIAL SEE TABLE
 FINISH SEE TABLE

22APROS
 NAME
 PRODUCT SPEC 108-1066
 APPLICATION SPEC 114-1049
 WEIGHT -
 CUSTOMER DRAWING

tyco
 Electronics
 Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME
 DIP SOCKET ASSY, LADDER,
 DIPLOMATE, RET. LEAD .600 CL, LEAD FREE

SIZE CASE CODE DRAWING NO
 A1 00779 C=1825376

RESTRICTED TO
 SCALE 5:1 SHEET 1 OF 1 REV A