

IC SOCKET 2.54mm (0.100")
 - PITCH=15.24mm







Specification

Contact Resistance: 30 mohms maximum.at DC 100mA
 Insulator Resistance: 1000 Megohms minimum.at DC 500V
 Current Rating: 1 AMP
 Dielectric Withstanding Voltage: AC 500V for 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Phosphor Bronze
 Housing: PBT & 30% Glass Fiber UL94V-0

Axx-LC-TT-R

OF CONTACTS (24 - 40)

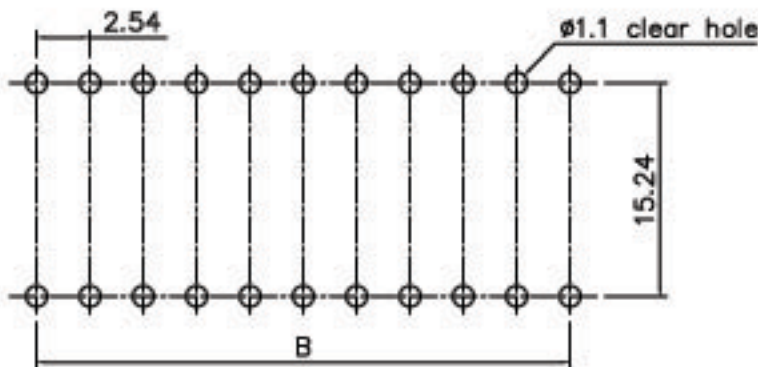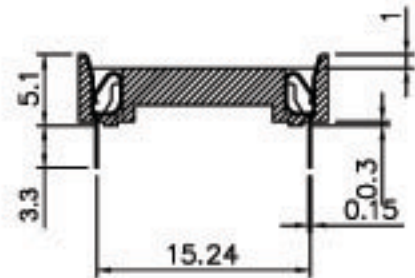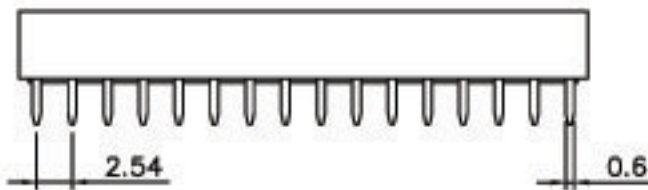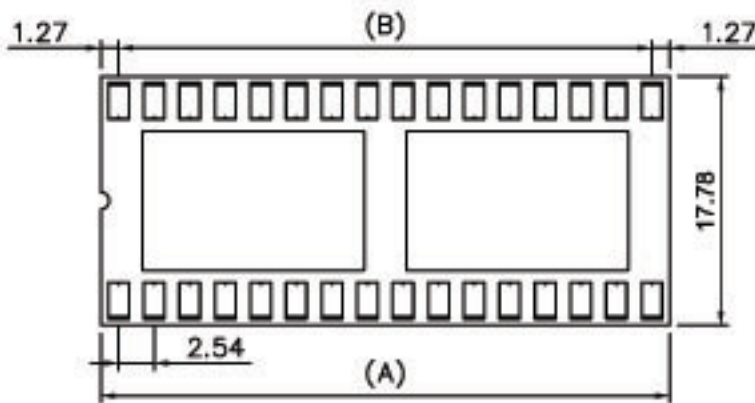

Recommended P.C.B. Layout

RoHS COMPLIANT

Dimensions

Positions	A	B
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10
40	50.80	48.26

一般公差	.00	±0.05	.0	±0.1	0.	±0.3	10-29.99	±0.5
30-99.99	±1.0	100-299.99	±1.5	IC SOCKET 2.54mm (0.100") - PITCH=15.24mm				
Axx-LC-TT-R (15.24mm)	比例	2/1	投影	第三角法	圖樣編號			
	單位	mm	繪圖	何 辭	日期	2002/12/26	版本	A
								承認