

STYLE "A"

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in GS-22-008.
- Packaging spec: see GS-14-920

NOTES:

- 1 INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- 2 CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD, PER ASTM B16.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172, PER ASTM B194.
- 3 CONTACT PLATING:
OUTER SHELL: 80-120u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 80-120u" TIN for LF VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LF VERSION
OVER 50u" NICKEL PER QQ-N-290.
- 4 NUMBER OF POSITIONS.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
-	-	-	-
g	LS07-0141	HLE	2007/05/21

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection inch
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	D-WOLFORD	2000/02/14	0.X	±0.1
Eng	A-VASBINDER	2000/02/14	0.XX	±0.1
Chr	A-VASBINDER	2000/02/14	0.XXX	±0.1
Appr	A-VASBINDER	2000/02/14	Product family SOCKET Spec ref RELEASED	
FCj		title PRESS FIT DIP SOCKET		Rev. L
catalog no		SEE TABLE	dwg no 58707	sheet 1 of 2

Copyright FCJ. FCj




1

2

3


4

STYLE "B"

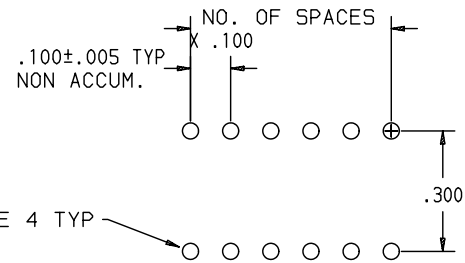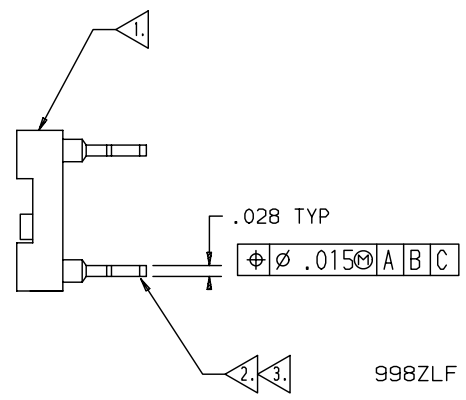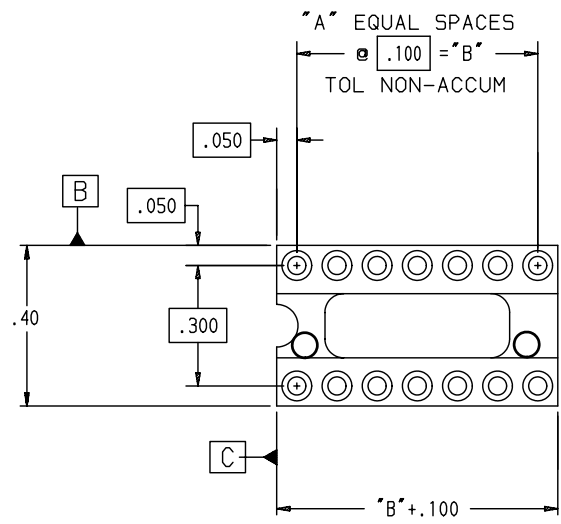

998ZLF CONTACT

THIS HOLE PATTERN APPLIES TO BOTH STYLE A AND STYLE B CONTACTS.

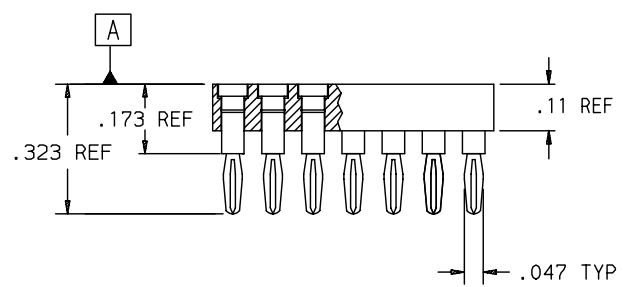

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in 65-22-008.
- Packaging spec: see 65-14-920

Copyright FCI. FCJ

NOTES:

- INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: PHOSPHOR BRONZE.
INNER CONTACT: BERYLLIUM COPPER.
- CONTACT PLATING:
OUTER SHELL: 200u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 200u" TIN for LEAD FREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LEADFREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
- COMPLIANT PRESS FIT IN $\varnothing .040 \pm .003$ PLATED
HOLE, RECOMMENDED DRILL SIZE 1.15 MM
FOR .090 TO .130 THICK BOARD.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
-	-	-	-
G	LS07-0141	HLE	2007/05/21

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection inch
TOLERANCES UNLESS OTHERWISE SPECIFIED				
ANGULAR	LINEAR	0.X	±0.1	size A3
0.XX' ±2'		0.XX	±0.1	Scale 1:1
0.XXX		0.XXX	±0.1	ECN LS08-0051
Dr	D-WOLFORD	2000/02/14	Product family	SOCKET
Eng	A-VASBINDER	2000/02/14	Spec ref	RELEASED
Chr	A-VASBINDER	2000/02/14		
Appr	A-VASBINDER	2000/02/14		
FCJ		title PRESS FIT DIP SOCKET		Rev. L
catalog no		SEE TABLE	dwg no 58707	sheet 2 of 2

REV F - 2006-04-17

1

2

3

4