
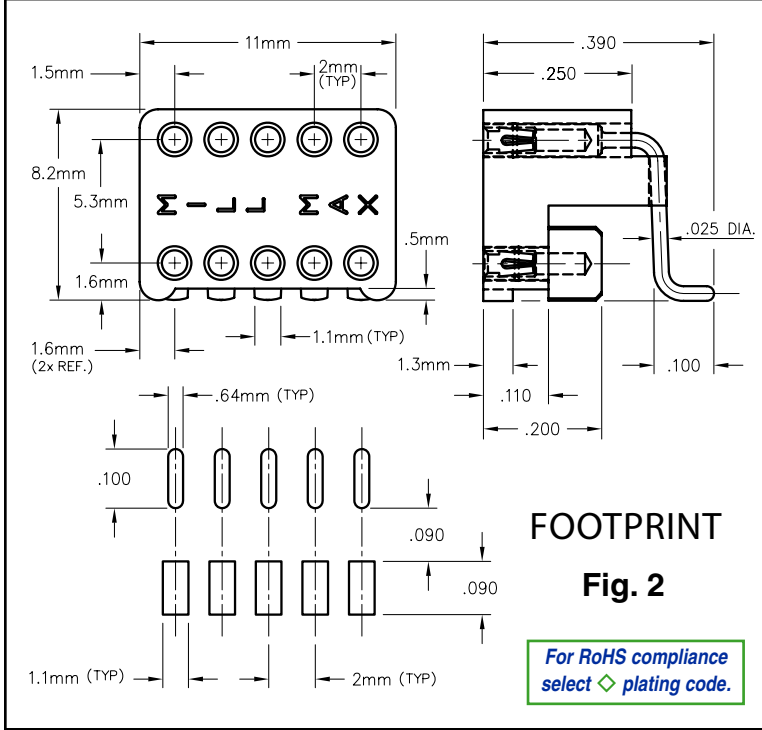
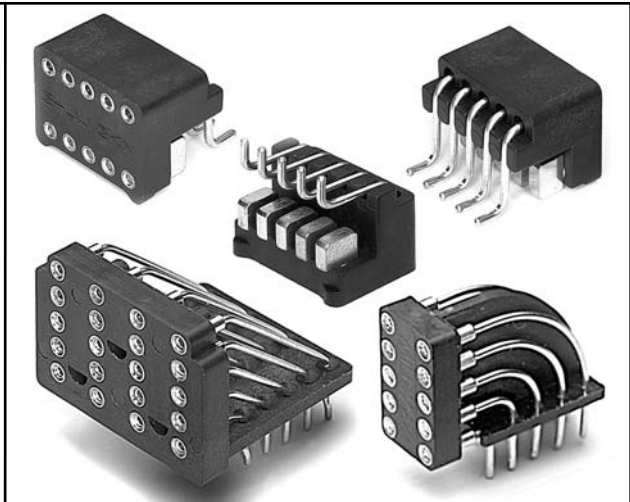


**Fig. 1**

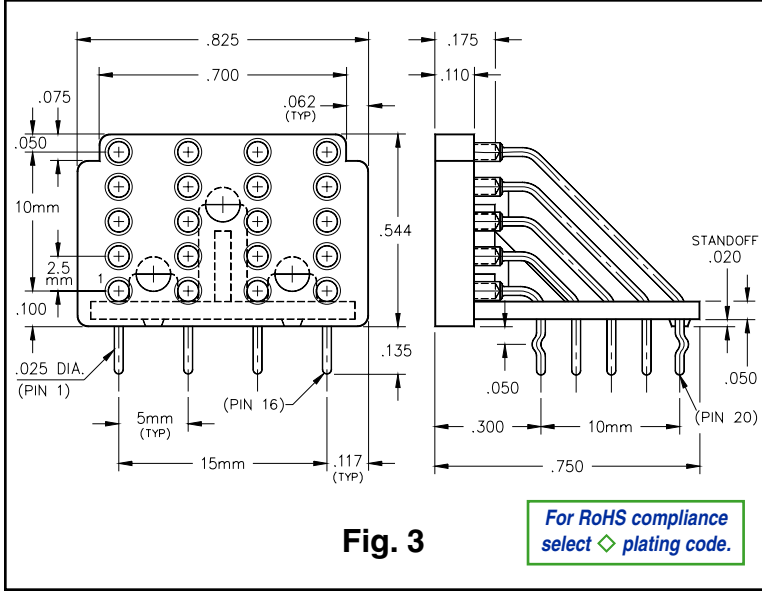

**FOOTPRINT**  
**Fig. 2**

- Series 296, 299 & 594 vertical display sockets are used to mount dot matrix and 7-segment LED displays at the edge of and perpendicular to a printed circuit board. This positions the display directly behind the translucent front panel of the equipment.
- Series 299 & 594 are thru-hole mount and can be wave or intrusive reflow soldered.
- Series 296 is surface mount and can be supplied on carrier tape for automated "pick 'n place" assembly.
- Insulators are high temp. Nylon 46, suitable for all soldering processes including "lead-free".



**Fig. 3**

Fig.	No. of pins	Ordering Information
1	10	<b>299-XX-210-12-001800</b>
		Plating Code
2	10	<b>296-XX-010-30-691800</b> (Discrete sockets)
		<b>296-XX-010-30-692800</b> (Supplied on 24mm wide carrier tape per EIA-481: 450 per 13" reel)
3	20	<b>594-XX-020-01-007032</b>
		Plating Code
SPECIFY PLATING CODE XX=		<b>99</b> <b>44</b>
Sleeve (Pin)		200µ" Sn/Pb    200µ" Sn
Contact (Clip)		200µ" Sn/Pb    200µ" Sn