


8600/8954/8955




Basic Part Number	Pin Length A
8600-0	.400
8600-1	.850
8600-2	1.200
8954-0	.136
8955-0	.655

8XXX-X-05-XX-00-00-03-0

Square press-fit in .043 plated thru hole

3159




Basic Part Number	Board Thickness	Length V
3159-1	.031	.062
3159-2	.062	.094
3159-3	.094	.125
3159-4	.125	.156

3159-X-00-XX-00-00-08-0

Swage mount in .064 hole


8952



8952-0-05-XX-00-00-03-0

Square press-fit in .087 plated thru hole


8953



8953-0-05-XX-00-00-03-0

Square press-fit in .047 plated thru hole

3230




3230-X-00-XX-00-00-08-0

Swage mount in .094 hole

Basic Part Number	Board Thickness	Length A	Length V
3230-1	.031	.202	.065
3230-2	.062	.228	.095
3230-3	.094	.258	.125
3230-4	.125	.288	.155


3146



3146-2-00-XX-00-00-08-0

Swage mount in .076 hole. For .062 thick board


3142



3142-2-00-XX-00-00-08-0

Swage mount in .062 hole. For .062 thick board


3232



3232-3-00-XX-00-00-08-0

Swage mount in .062 hole. For .094 thick board

3145

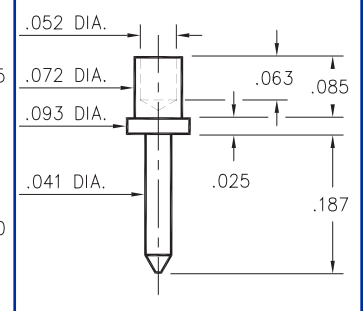

3145-2-00-XX-00-00-08-0

Swage mount in .076 hole. For .062 thick board

SPECIFICATIONS

PIN MATERIAL:
Brass Alloy 360, 1/2 Hard
(Except Swage pins which are annealed)

DIMENSION IN INCHES
TOLERANCES ON:
LENGTHS: ±.005
DIAMETERS: ±.002
ANGLES: ± 2°

ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - 0X - 0

BASIC PART #



SPECIFY PIN FINISH:

- 01 200µ" TIN/LEAD OVER NICKEL
- 80 200µ" TIN OVER NICKEL
- 15 10µ" GOLD OVER NICKEL
- 21 20µ" GOLD OVER NICKEL
- 34 50µ" GOLD OVER NICKEL