




# DATA SHEET

**Product Number: 3157-0-00-15-00-00-03-0**

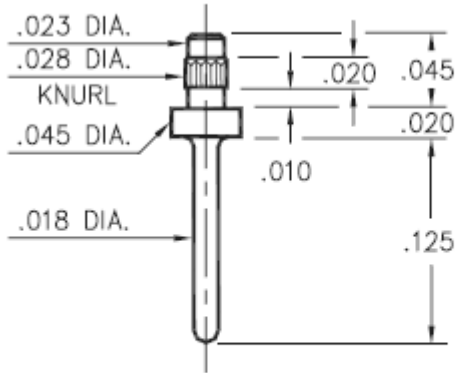

**Description:**

**3157** - Solderless Pressfit PCB Pin

**Packaging:**

Packaged in Bulk

**3157-0-00-XX-00-00-03-0**

Press-fit in .026 mounting hole

Mill-Max Part Number	Shell Plating	Contact Plating	RoHS Compliant
3157-0-00-15-00-00-03-0	10 μ" Gold over Nickel	00	

**SHELL MATERIAL:**

**BRASS ALLOY** (UNS C36000) per ASTM B 16

**Properties of BRASS ALLOY:**

- Chemical composition: Cu 61.5%, Zn 35.4%, Pb 3.1%†
- Hardness as machined: 80-90 Rockwell B
- Density: .307 lbs/in<sup>3</sup>
- Electrical conductivity: 26% IACS\*
- Melting point: 900°C/885°C (liquidus/solidus)

†(3 to 4% lead is used to permit "free machining" and is permitted by EC Directive 2002/95Annex 6; so all pin materials are RoHS compliant)

\*International Annealed Copper Standard, i.e. as a % of pure copper.