

RoHS Compliant

1

2

3

4



Notes:

- Insulator  
PPS, UL 94V-0
- Contacts  
Phosphor Bronze  
Matte Tin Plated 150U" over Nickel
- Current Rating  
1A
- Insulating Resistance  
10000M ohm Min.
- Withstanding Voltage  
1000V AC
- Contact Resistance  
15m ohm Max.
- Operating Temperature  
-40 Degree to +105 Degree

**A-CCSxx-x-xxx-R**

└<sub>1</sub> └<sub>2</sub> └<sub>3</sub>

- 1. No. of Contacts  
20/28/32/44/52/68/84
- 2. Finish  
z - Tin  
G - Gold
- 3. Version  
SM : without polarizing peg, tube packing

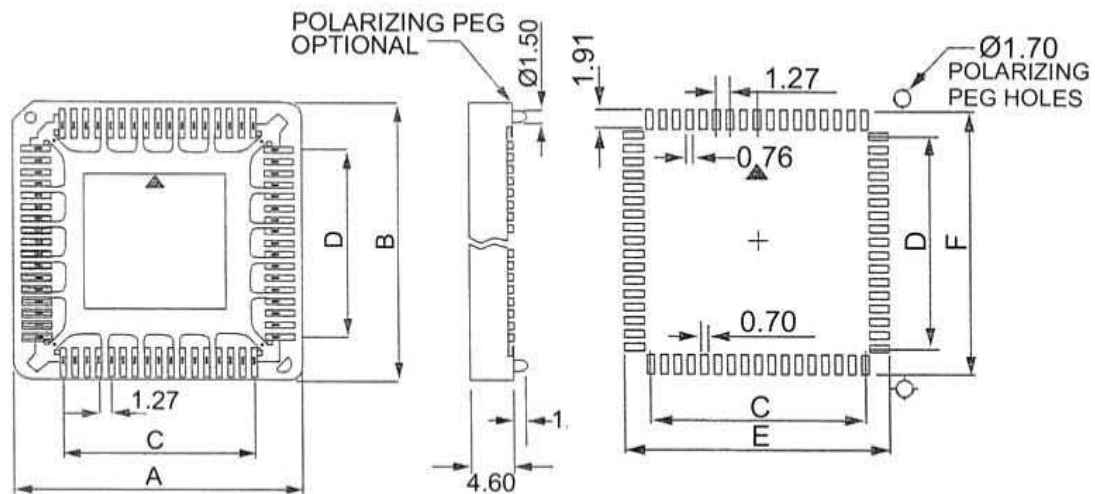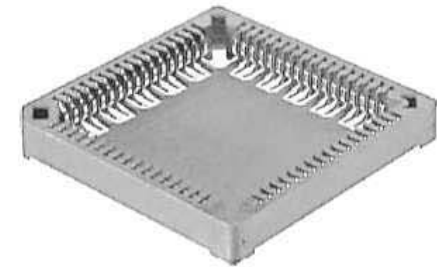

A

A

B

B

C

C

Description

Name:  
**A-CCSxx-x-xxx-R**  
Chip-carrier-sockets,SMD

Approval.:  
Check.: Ahmaa  
Feb.23,06  
Draw.: Alex  
Feb.23,06  
Rev.: 01  
Unit: mm  
Sheet: 1/1

**ASSMANN**  
Electronic Components

No. of Contacts	Quantity in tube	Dimension					
		A	B	C	D	E	F
20	39	15,34	15,34	5,08	5,08	10,03	10,03
28	33	17,86	17,86	7,62	7,62	12,57	12,57
32	29	17,85	20,42	7,62	10,16	12,57	15,11
44	26	23,07	23,07	12,70	12,70	17,65	17,65
52	23	25,50	25,50	15,24	15,24	20,19	20,19
68	19	31,00	31,00	20,32	20,32	25,27	25,27
84	16	36,10	36,10	25,40	25,40	30,35	30,35

D

D

1

2

3

4