


**Fig. 1**

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes.
- Series 712 uses MM #0255 pins. See page 134 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Insulators are high temp. thermoplastic.

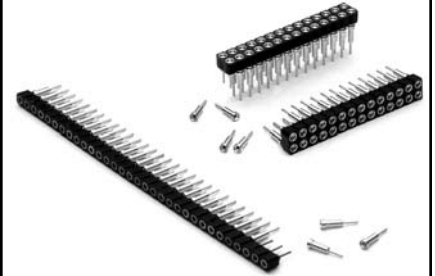

**Ordering Information**

**Single Row (.028 or .055 min. mounting holes)**

**Fig. 1**

712-XX-1\_\_-41-001000


Specify # of pins → 01-64

**Double Row (.028 or .055 min. mounting holes)**

**Fig. 2**

712-XX-2\_\_-41-001000

Specify # of pins → 02-64

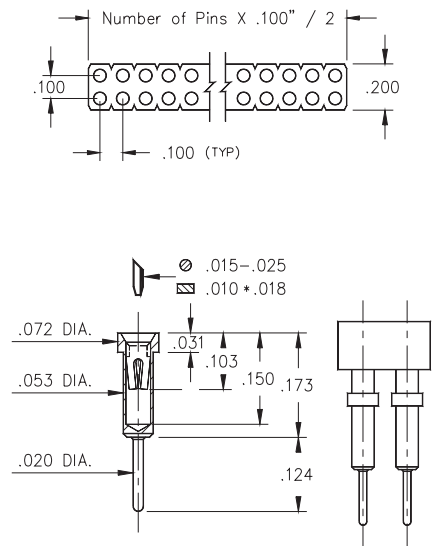

**Fig. 2**



**XX=Plating Code**  
**See Below**

For RoHS compliance  
 select ◊ plating code.

SPECIFY PLATING CODE XX=	13◊		93		43◊
Sleeve (Pin)	10μ" Au		200μ" Sn/Pb		200μ" Sn
Contact (Clip)	30μ" Au		30μ" Au		30μ" Au