


- Low profile receptacles sit .031" above the board.
- Series 714 uses MM #1401 & MM #1407 pin receptacles. See pages 126 and 139 for details.
- Hi-Rel, 4-finger BeCu #30 contact is used in the #1401 receptacle and a BeCu #11 contact is used in the #1407. Both contacts are rated at 3 amps. See pages 206 & 208 for details.
- Insulators are high temp. thermoplastic.

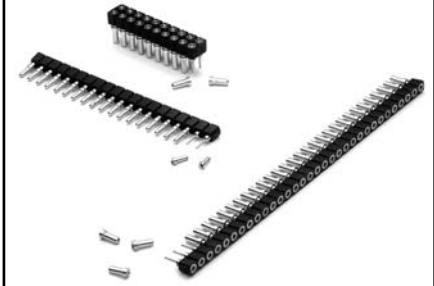

Ordering Information

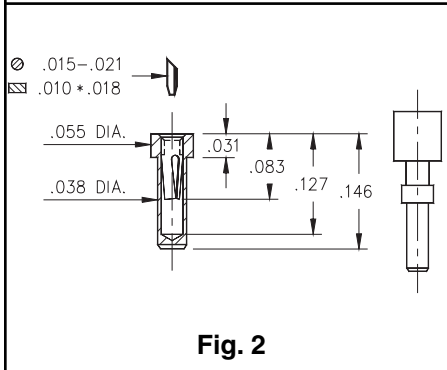


Fig. 1	Single Row (.055 min. mounting hole)
	714-XX-1__-41-001000 Specify # of pins → 01-64
Fig. 2	Single Row (.039 min. mounting hole)
	714-XX-1__-31-007000 Specify # of pins → 01-64


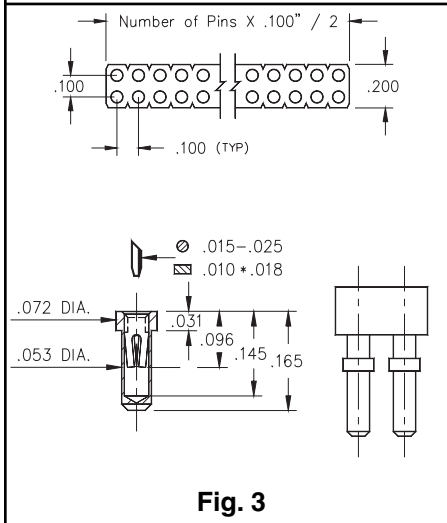


Fig. 3	Double Row (.055 min. mounting hole)
	714-XX-2__-41-001000 Specify # of pins → 02-64
Fig. 4	Double Row (.039 min. mounting hole)
	714-XX-2__-31-007000 Specify # of pins → 02-64

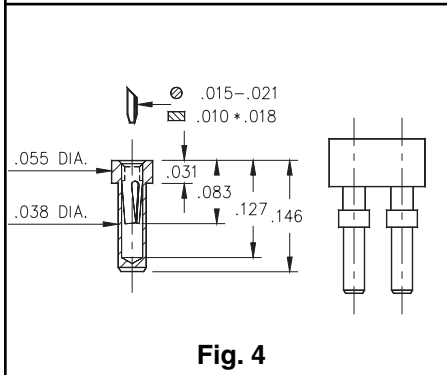

RoHS
2002/95/EC

XX=Plating Code
See Below

For RoHS compliance
select ◊ plating code.

SPECIFY PLATING CODE XX=	13◊	93	99	43◊	44◊
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn