




# Static Control Products and Services Catalog



It's a Matter of Control.

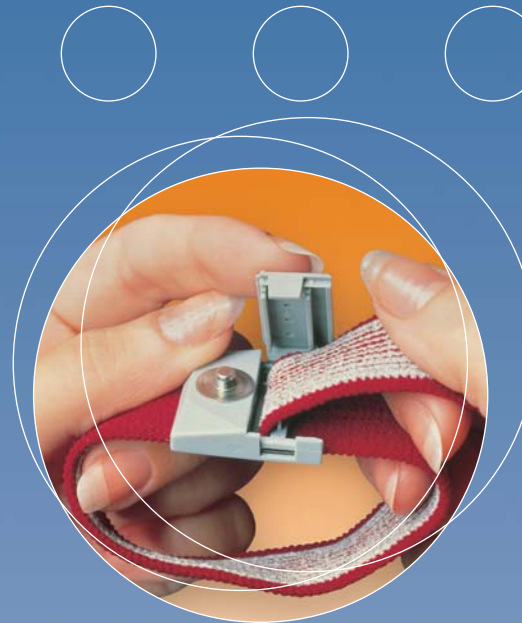

## 3M™ Static Control Solutions

**A Reputation of Trust.** Over the past 100 years, 3M has become widely recognized as a world leader in product innovation. Our ability to combine core technologies has allowed more than 55,000 3M products to become an important part of everyday in many markets, including electronics, industrial, automotive, medical and consumer.

**The Experts in Static Control.** The need for static protection to drain electrostatic charges from personnel and materials is well accepted in many industries. It is of particular importance with the handling and protection of precision high-tech products such as disk drives, semiconductors, flat panel displays and other electronics. From air ionization to monitoring, flooring and shipping materials, 3M provides complete solutions to meet the challenge of electrostatic discharge (ESD) and adverse environmental conditions during handling and transportation.

**It's a Matter of Control.**

# Assembly

# Test

## Assembly

- 1** Personnel Grounding Products  
Chapter 1, p. 2
- 2** Workstation Monitors  
Chapter 1, p. 8
- 3** Shoe Grounding Products  
Chapter 1, p. 6
- 4** Worksurfaces  
Chapter 1, p. 18
- 5** Tile or Epoxy Flooring  
Chapter 5, p. 66
- 6** Anti-Fatigue Mats  
Chapter 1, p. 22

## Test

- 7** Worksurfaces  
Chapter 1, p. 18
- 8** Test Kits  
Chapter 3, p. 52
- 9** Charge Analyzers  
Chapter 3, p. 53
- 10** Air Ionizers  
Chapter 1, p. 32




### ESD PROTECTION FOR YOUR ENTIRE FACILITY

3M provides comprehensive solutions to protect your operation from electrostatic discharge every step of the way. The illustration above demonstrates where our products can help. Follow this chart, then turn to that page in this catalog for a complete listing of products in that category available from 3M.

### ASSEMBLY

ESD protection in manufacturing and assembly is a critical area that requires a successful static control management system. 3M offers a complete line of grounding and static-protective products for use during these processes. From personnel to worksurfaces, floors, and packaging, 3M has you covered.

# Packaging

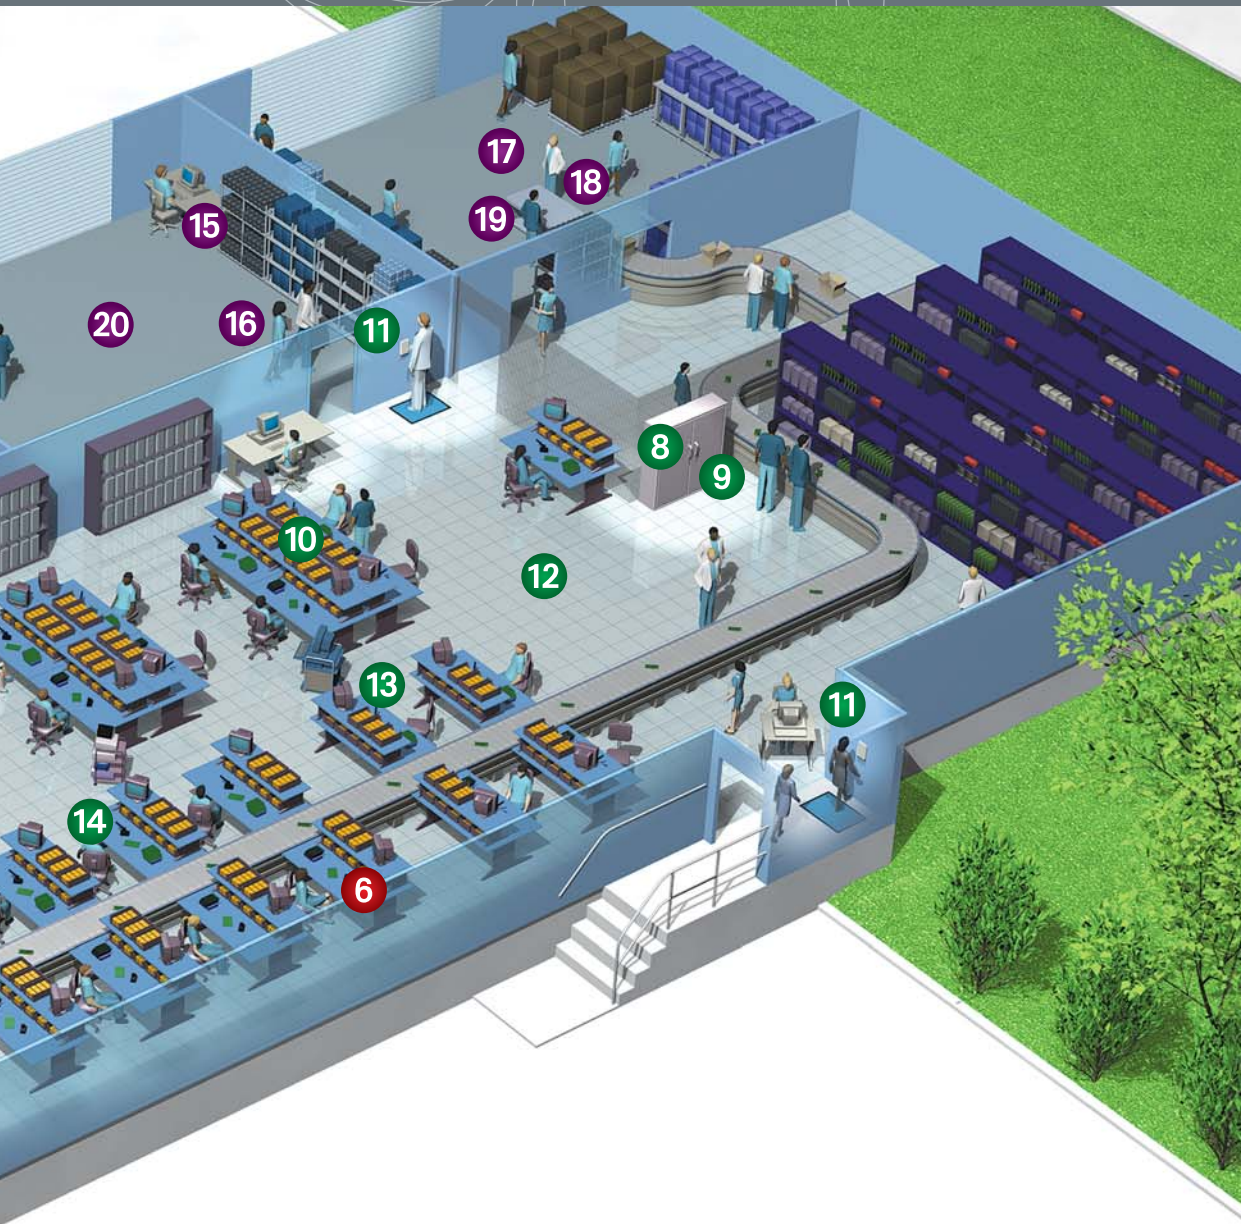

## TEST

Electrical overstress in components caused by ESD can result in either a catastrophic failure or a shortened life of the component. Damaged or destroyed devices typically are found in final testing, while weakened devices often result in a field failure. 3M™ monitoring systems can record ESD events in real time, providing instant notification of static-control equipment failures.

## PACKAGING

Degraded or weakened devices that pass all factory tests, but then fail after they have reached the customer are a very expensive problem. 3M provides customers with value-added solutions for protecting devices from static and physical damage during material handling, storage and transport.

## Test *(continued)*

- 11 Wrist Strap/  
Footwear Testers  
Chapter 3, p. 55
- 12 Tile or Epoxy  
Flooring  
Chapter 5, p. 66
- 13 Workstation  
Monitors  
Chapter 1, p. 8
- 14 Shoe Grounding  
Products  
Chapter 1, p. 6

## Packaging

- 15 Workstation  
Monitors  
Chapter 1, p. 8
- 16 Personnel Grounding  
Products  
Chapter 1, p. 2
- 17 Shoe Grounding  
Products  
Chapter 1, p. 6
- 18 Static Shielding Bags  
Chapter 2, p. 40
- 19 Moisture Vapor  
Barrier Bags  
Chapter 2, p. 42
- 20 Tile or Epoxy  
Flooring  
Chapter 5, p. 66

# A full range of products. Full-service solutions.



## THE NEED FOR COMPLETE STATIC CONTROL SOLUTION

In an increasingly technological age, electrostatic discharge (ESD) is more than just an annoyance, it can be costly or even dangerous. In static-sensitive environments, ESD can damage sensitive electronic components, attract contaminants in clean environments or cause problems when handling films or small parts.

The cost of ESD-damaged electronic devices alone adds up, but the additional loss of production time is significant as well. Clearly, opportunities exist for significant improvements in reducing losses to ESD and static electricity.

## GLOBAL SUPPORT FROM THE INDUSTRY LEADER

3M has built a global network of resources with the ability to address your needs on local, regional and international levels. With each facility in your operation, our experienced team works with you one-on-one to evaluate each step in the process to accurately provide a static control solution uniquely suited to meet your needs. 3M is your single source for fast, customized solutions anywhere in the world.

## VALUE-ADDED SERVICES THAT SET US APART

Our products are designed to be reliable and dependable, but it is our customer services that truly demonstrate our extended value to you. To help you reduce your total cost of ownership, 3M offers a long list of value-added services, including local warehousing, custom make-to-order, just-in-time manufacturing (JIT), electronic funds transfer, web PO, EDI, extranet services for key customers, on-site training and more.

## Section

## Pages


---

|   |              |
|---|--------------|
| 1. Static Control Workstation Solutions .....                 | 1            |
| Personnel Grounding Products .....                            | 2-7          |
| Wrist Straps (Single Conductor) .....                         | 2            |
| Shoe Grounding .....  | 6-7          |
| Static Control Monitors .....                                 | 8-17         |
| Wrist Straps (Dual Conductor) .....                           | 16           |
| Table/Floor Mats and Runners.....                             | 18-24        |
| Vinyl Mats.....   | 18           |
| Rubber Mats .....   | 19           |
| Conductive Mats.....  | 20           |
| Rigid Laminates .....   | 21           |
| Anti-Fatigue Mats and Runners .....                           | 22           |
| Field Service Kits.....                                       | 25-27        |
| Hardware and Accessories .....                                | 28-31        |
| Air Ionizers .....  | 32-35        |
| Overhead .....  | 32           |
| Gun .....   | 33           |
| Benchtop.....   | 34           |
| Static Sensor/Ionizer Tester .....                            | 36, 59       |
| 2. Static Control Packaging and Transportation Products ..... | 37           |
| Shielding and Barrier Packaging.....                          | 38-41        |
| Moisture Vapor Barrier .....                                  | 42           |
| Conductive Packaging.....                                     | 43-44        |
| Conductive Film .....   | 43           |
| Bags and Drum Liners.....                                     | 44           |
| Single Card Device Carriers .....                             | 45           |
| Connector Covers.....   | 46-47        |
| Labels .....  | 47           |
| Hinged Containers.....  | 48           |
| 3. Test Equipment .....                                       | 49-59        |
| Test Kits .....   | 52           |
| Charge Analyzers .....  | 53-54, 63-64 |
| Shoes/Wrist Strap Testers .....                               | 55-59        |
| 4. Training .....   | 61-64        |
| 5. Permanent Flooring Systems.....                            | 65-70        |
| 6. Tapes.....   | 71-76        |
| 7. Electrostatic Discharge Control Measures .....             | 77-78        |
| 8. Ordering Information .....                                 | 79           |
| 9. International Information .....                            | 79-81        |
| 10. Index.....  | 82-84        |

# Static Control Workstation Solutions

1

*3M™ Electrostatic Discharge (ESD) Workstation Solutions provide a safe environment for the handling and assembly of sensitive components. These products drain static charge from personnel, limit the buildup of static charges on non-conductive materials on the benchtop, and monitor the system to ensure that it is operating properly. These various components can be configured to work together providing optimal protection for your application.*






# Static Control Workstation Solutions

## Adjustable Fabric Wrist Straps (Single Conductor)

3M™ Adjustable Wrist Straps are the front line of defense in all static control processes. Provide a comfortable, custom fit with these adjustable wrist straps. One size adjusts to any size wrist to provide reliable, 360 degree protection. These wrist straps feature a band made of a silverplated, monofilament, continuous thread woven together with elastic nylon to assure full conductivity, comfort and reliability, while providing rapid and continuous drain of static charge. Adjustability also simplifies ordering procedures and inventory control by eliminating the need to order and stock several band sizes. A one megohm resistor is built into the ground cord. All wrist strap sets include an alligator clip, which fits over the installed banana jack on the ground cord, to provide an alternative ground attachment method. Available with 4 mm snap end. Adjustable bands fit wrist circumference up to 9.0" (228, 6 mm).

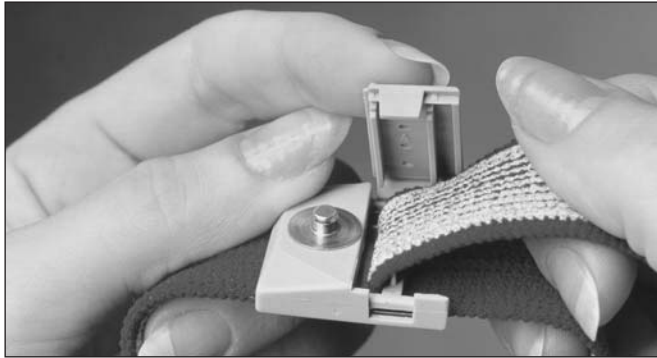

Adjustable Wrist Strap for Single Conductor Cords



| Product No. | Description  |
|-------------|--|
| 2204        | Adjustable Fabric Wrist Band, made of knitted fabric, in burgundy color.   |
| 2214        | Fabric Wrist Band with coiled cord. 5 ft. (1,5 m) practical extended length with burgundy adjustable fabric band.  |
| 2224        | Fabric Wrist Band with coiled cord. 10 ft. (3,0 m) practical extended length with burgundy adjustable fabric band. |

| Product No. | Description  |
|-------------|--|
| 2271        | Economy Adjustable Fabric Wrist Band is made of stretch weave fabric, blue color with white trim.                    |
| 2272        | Economy Adjustable Wrist Band with coiled cord. 5 ft. (1,5 m) practical extended length, blue color with white trim. |

## Fixed Size Metal Wrist Straps (Single Conductor)

3M Metal Wrist Straps feature quality Speidel™ metal expansion bands for durability and comfort. Each link is covered with an insulative plastic cap. Compatible with the 3M™ Wrist Strap Ground Cords 2210, 2220 and 4610/4611.

Three sizes are available: small for wrists from 4.5 in. to 6 in. (114 mm to 152 mm) in circumference; medium for wrists from 5.5 in. to 7.25 in. (140 mm to 184 mm); and large for wrists larger than 6.5 in. (165 mm). All wrist strap sets include an alligator clip, which fits over the installed banana jack on the ground cord, to provide an alternative ground attachment method. Available with 4 mm snap end.



3M™ Wrist Band 2205 Series

| Product No. | Description                                 |
|-------------|---|
| 2205        | Bulk pack of 25 metal wrist bands. (Small)  |
| 2206        | Bulk pack of 25 metal wrist bands. (Medium) |
| 2207        | Bulk pack of 25 metal wrist bands. (Large)  |





## Adjustable Thermoplastic Wrist Straps

The 3M™ Adjustable Wrist Straps 4600 Series feature a thermoplastic band with an integrally molded conductive interior. The wrist strap utilizes an easy on/easy off adjustable “zipper” style latching mechanism and is available with 4 mm snaps and 5 ft. ground cords. (10 ft. ground cord available with 4 mm snap only.) All wrist straps and cords include alligator clips.



Wrist Band 4600 Series shown with ground cord and alligator clip

| Product No. | Description   |
|-------------|---|
| 4610        | Ground Cord, Coiled, 5 ft. (1,5 m), 4 mm snap end.  |
| 4611        | Ground Cord, Coiled, 10 ft. (3,0 m), 4 mm snap end. |

| Product No. | Color | Description                                   |
|-------------|-------|---|
| 4620        | Blue  | Wrist Band with 4 mm stud.                    |
| 4650        | Blue  | Wrist Band with 5 ft. coiled cord, 4 mm stud. |


### Grounding Cord 4600 Properties

| Grounding Cord   | Typical Value                     |
|--|-----------------------------------|
| Tensile Strength   | > 15 lbs. (6,8 kg)                |
| Average Termination flex life per ESD S1.1 and MIL-PRF-87893 | > 200,000 flexes                  |
| Resistance End-to-end  | 1M $\Omega$ $\pm$ 20%             |
| Resistor Type  | 1M $\Omega$ -metal film $\pm$ 20% |

### Wrist Band 4600 Properties

| Wrist Strap                 | Typical Value   |
|-----------------------------|---|
| Wrist Band Size             | Adjustable, small/large, trim to size 1.7 to 2.7 in dia. (43,2 mm to 68,6 mm) |
| Resistance - Inside/Outside | > 100M $\Omega$   |
| Cleanable                   | Water/mild detergent or 10% isopropyl solution                                |

## Latch Durability 4600 Series

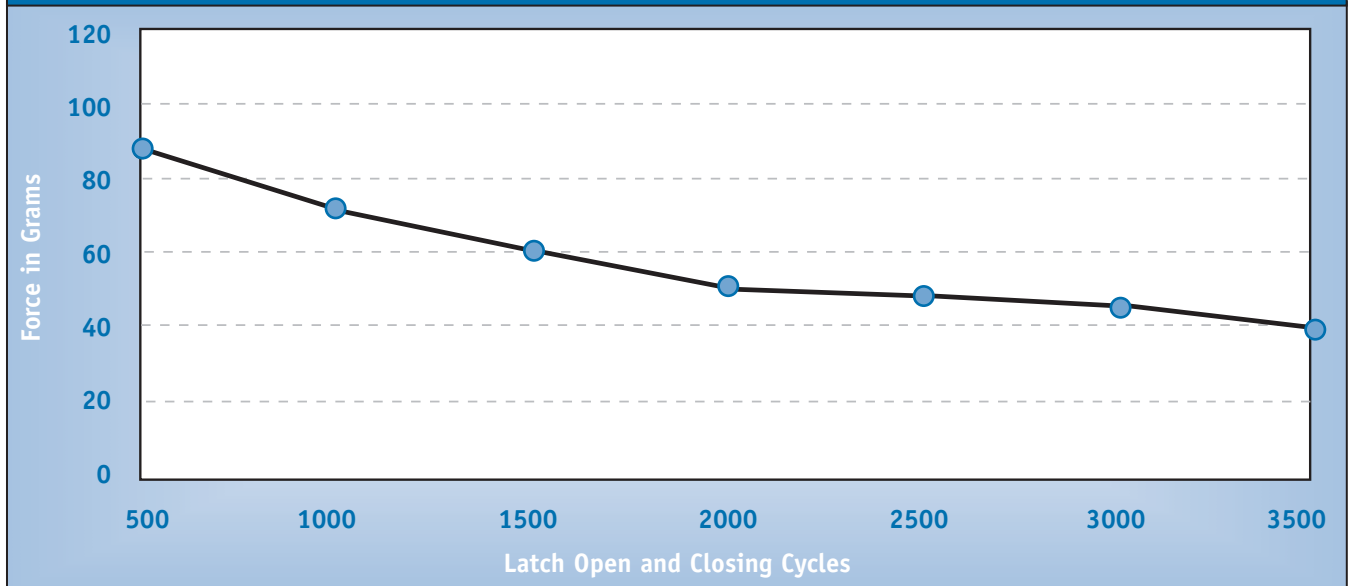



# Static Control Workstation Solutions

## Wrist Strap Ground Cords

3M™ Wrist Strap Ground Cords 2210, 2220 and 4610 Series are highly durable with segmented strain relief, and a single bundle of tinsel conductors laced for great strength and reinforced with strong synthetic fibers. These features provide long cord life and easy movement. Each cord has a 1 megohm resistor molded into the snap end. All wrist straps and cords include alligator clips.



Ground Cord 2210



Ground Cord 4610 (includes Alligator Clip not shown)

| Product No. | Description   |
|-------------|---|
| 2210        | Ground Cord, coiled 5 ft. (1,5 m) practical extended length.  |
| 2220        | Ground Cord, coiled 10 ft. (3,0 m) practical extended length. |
| 4610        | Ground Cord, Coiled, 5 ft. (1,5 m), 4 mm snap end.            |
| 4611        | Ground Cord, Coiled, 10 ft. (3,0 m), 4 mm snap end.           |

### ⚠ Warning on all wrist strap products:

A one megohm resistor is molded into 3M Wrist Strap Ground Cords. DO NOT REMOVE. If it becomes damaged, replace ground cord immediately. These products are not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 250 Volts AC.

These products are for static control. They will not reduce or increase your risk of receiving electrical shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the 3M Wrist Strap.



## Disposable Wrist Straps


The 3M™ Disposable Wrist Strap 2209 provides cost-effective and reliable static protection. The wrist strap is ideally suited for shipment along with components and devices, such as memory upgrades, sound cards, etc., to provide protection at the receiving end. It may also be used for short-term use in the plant for visitors and others who don't need the durability of a reusable strap.

At the end that wraps around the wrist, a hypoallergenic adhesive provides 360-degree contact with the skin to minimize skin-to-band resistance. At the other end, the conductive adhesive on the copper foil tape adheres to any convenient electrical ground. A current-limiting resistance is fabricated into the plastic ribbon below the wrist band.

Each Disposable Wrist Strap 2209 is individually packaged in a clear poly envelope. Custom printing is available by special order.



Disposable Wrist Strap 2209

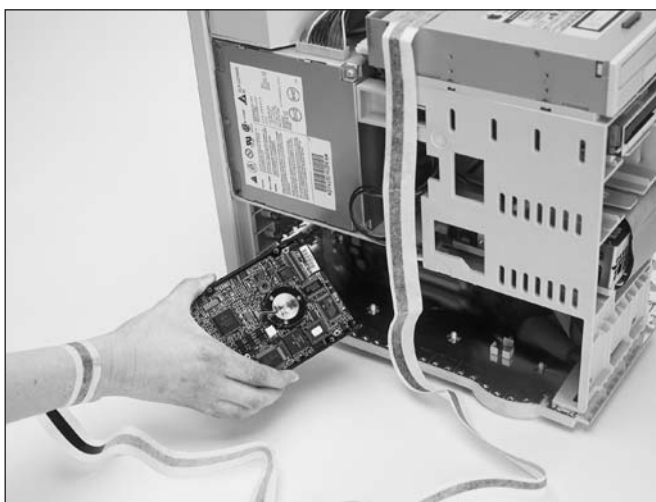

Disposable Wrist Strap 2209

| Product No. | Description             |
|-------------|-------------------------|
| 2209        | Disposable Wrist Strap. |

Custom envelope imprinting is available.

### 2209 Properties

| Item                             | Typical Properties  |
|----------------------------------|---|
| Ground/Bonding End               | Copper foil with conductive adhesive on both attached to conductive ribbon.   |
| Conductive Ribbon                | Flexible conductive film, with fabricated current limiting resistance near wrist band end. Conductive ribbon enclosed in non-woven adhesive tape. |
| Wristband End                    | Conductive ribbon with exposed hypo-allergenic adhesive along each side of conductive ribbon  |
| Practical Working Length         | 4 ft. (1,2 m)   |
| Electrical Resistance End to End | 1.0 to 5.0 Megohms  |

**3M**  
Disposable Wrist Strap  
**2209**

INSTRUCTIONS

1. Unwrap 12" (30 cm) of the band and wrap adhesive side around your wrist.
2. Unroll rest of band and remove liner from copper tape.
3. Attach the copper tape to electrical ground or the metal frame of equipment you are servicing.

UL LISTED

Standard envelope

**A • B • C**  
*Electronics*  
1•800•000•0000

Manufactured for  
ABC Electronics  
by 3M.

INSTRUCTIONS

1. Unwrap 12" (30 cm) of the band and wrap adhesive side around your wrist.
2. Unroll rest of band and remove liner from copper tape.
3. Attach the copper tape to electrical ground or the metal frame of equipment you are servicing.

UL LISTED

Custom envelope example





# Static Control Workstation Solutions

## Disposable Shoe Grounding Assembly

3M™ Disposable Shoe Grounding Straps 2045 provide a reliable path for static charge to drain to ground when personnel are wearing shoes with insulative soles.

The shoe grounding straps are especially desirable in work situations where personnel must move around – wave soldering, automatic insertion or operation of sensitive computerized equipment. To be effective, the shoe grounders must be worn on both feet.



Disposable Shoe Grounding Straps 2045

| Product No. | Description   |
|-------------|---|
| 2045        | Disposable Shoe Grounding Straps. (100 per box). One size fits all low cut shoes. |

### **Warning:**

The Disposable Shoe Grounding Strap 2045 is not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 120 Volts AC.

*Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.*

## Toe Grounding Assembly

Designed for use with high-heeled shoes, the 3M™ Toe Grounding Assembly 2053 grounds personnel when they are in contact with conductive/dissipative flooring. A comfortable elastic ankle strap and 12-inch (30,5 cm) long conductive ribbon for insertion into the shoe complete the ground path to the operator. To be effective, the shoe grounders must be worn on both feet. Available with a 1 megohm resistor.



Toe Grounding Assembly 2053

| Product No. | Description                                      |
|-------------|--|
| 2053        | Toe Grounding Assembly with a 1 megohm resistor. |

### **Warning:**

The Grounding Assembly 2053 is not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 250 Volts AC.



## Heel Grounding Assembly

The 3M™ Economy Heel Grounder 2044—a cup-style heel grounder with a high visibility “yellow glow” strap that helps facility supervisors effectively manage their static control program. With the Economy Heel Grounder 2044, supervisors may now see at a single glance whether employees are properly wearing their heel grounding assemblies, and ensure their company is protected against static damage. Dependable and cost-efficient, the Heel Grounder 2044 effectively grounds mobile personnel when they are in contact with conductive and dissipative flooring, and should be an integral part of any static control system in the workplace.

In addition to the bright yellow coloring, the Heel Grounder’s cup construction satisfies customer need for durability, while the one-inch width of the ankle strap material is designed with a “one size fits all” conformity of fit that will accommodate a wide variety of shoe shapes and sizes.



Shoe Grounding Assembly 2044

The 3M™ Shoe Grounding Assembly 2051 effectively grounds mobile personnel when they are in contact with conductive and dissipative flooring. The conductive, no-slip outer sole provides a reliable static ground. After being trimmed to a desired length, an extra-long contact ribbon is inserted between the shoe and sock. The function of the Shoe Grounding Assembly depends upon foot perspiration in the shoe to sustain electrical contact between the conductive ribbon and the body. The Shoe Grounding Assembly 2051 comes with a one megohm resistor.



Shoe Grounding Assembly 2051

| Product No. | Description   |
|-------------|---|
| 2044        | Economy Shoe Grounding Assembly with a 1 megohm resistor.     |
| 2051        | Shoe Grounding Assembly with a 1 megohm resistor.             |
| 2056        | Non-marking Shoe Grounding Assembly with a 1 megohm resistor. |

\*To be effective, shoe grounders must be worn on both feet.

**Warning:**

The 3M Heel Grounding Assemblies 2044, 2051 and 2056 Series are not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 250 Volts AC.

The 3M™ Non-Marking Shoe Grounding Assembly 2056 reliably grounds mobile personnel when they are in contact with conductive and dissipative flooring. The non-marking conductive, carbon-free, non-slip outer layer provides a dependable static ground while the inner layer provides a non-marking surface for the shoe. After being trimmed to a desired length, an extra-long contact ribbon is inserted between the shoe and sock. The function of the heel grounding assembly depends upon the foot perspiration in the shoe to sustain electrical contact between the conductive ribbon and the body. The Shoe Grounding Assembly 2056 is designed with a one megohm resistor.



Non-marking Shoe Grounding Assembly 2056



# Static Control Workstation Solutions

## Wrist Strap / Continuous Workstation Monitor Applications Chart

| Function                                   | Monitors                          |                              |                        |   |                             |
|--|-----------------------------------|------------------------------|------------------------|---|-----------------------------|
|  | 3M™ Equipment Ground Monitor 791E | 3M™ Wrist Strap Monitor 791W | 3M™ Static Monitor 790 | 3M™ Wrist Strap Workstation Monitor 724 | 3M™ Wrist Strap Monitor 725 |
|  |                                   |                              |                        |   |                             |
| Monitors one wrist strap                   |                                   |                              |                        |   | •                           |
| Monitors two wrist straps                  |                                   | •                            | •                      | •                                       |                             |
| Monitors worksurface to ground connections | •                                 |                              |                        | •                                       |                             |
| Monitors equipment ground                  | •                                 |                              |                        |   |                             |
| Monitors person's voltage                  |                                   | •                            | •                      |   |                             |
| Monitors wrist strap resistance            |                                   |                              |                        | •                                       | •                           |
| Uses dual conductor wrist strap            |                                   | •                            | •                      | •                                       | •                           |
| Logs data                                  | •                                 | •                            |                        |   |                             |
| <b>Feature</b>                             |                                   |                              |                        |   |                             |
| Audible alarms                             | •                                 | •                            | •                      | •                                       | •                           |
| Visual alarms                              | •                                 | •                            | •                      | •                                       | •                           |
| Portable                                   |                                   |                              | •                      |   | •                           |
| <b>Wrist band type</b>                     |                                   |                              |                        |   |                             |
| Regular (Dual conductor)                   |                                   |                              |                        | •                                       | •                           |
| VM Series (Dual conductor)                 |                                   | •                            | •                      |   |                             |
| <b>Housing</b>                             |                                   |                              |                        |   |                             |
| Stainless steel                            | •                                 | •                            |                        |   |                             |
| Anodized steel                             |                                   |                              |                        | •                                       |                             |
| Dissipative plastic                        |                                   |                              | •                      |   | •                           |

## Wrist Strap / Continuous Workstation Monitor Compatibility Chart

| Wrist Band  |           | Monitors                                    |                                       |   |   |  |
|---|-----------|---|---------------------------------------|---|---|--|
| Description   | Model No. | 3M™ Wrist Strap Monitor 791W (voltage type) | 3M™ Static Monitor 790 (voltage type) | 3M™ Wrist Strap Workstation Monitor 724 (resistance type) | 3M™ Wrist Strap Monitor 725 (resistance type) |  |
| Fabric Wrist Band, Adjustable, Dual Conductor         | 2368      |   |                                       | •   | •   |  |
| Fabric Wrist Band, Adjustable, Dual Conductor         | 2368VM    | •   | •                                     |   |   |  |
| Metal Wrist Strap with 5' Dual Conductor Cord, Small  | 2381      |   |                                       | •   | •   |  |
| Metal Wrist Strap with 5' Dual Conductor Cord, Small  | 2381VM    | •   | •                                     |   |   |  |
| Metal Wrist Strap with 5' Dual Conductor Cord, Medium | 2382      |   |                                       | •   | •   |  |
| Metal Wrist Strap with 5' Dual Conductor Cord, Medium | 2382VM    | •   | •                                     |   |   |  |
| Metal Wrist Strap with 5' Dual Conductor Cord, Large  | 2383      |   |                                       | •   | •   |  |
| Metal Wrist Strap with 5' Dual Conductor Cord, Large  | 2383VM    | •   | •                                     |   |   |  |
| Metal Wrist Band, Dual Conductor Cord, Small          | 2384      |   |                                       | •   | •   |  |
| Metal Wrist Band, Dual Conductor Cord, Small          | 2384VM    | •   | •                                     |   |   |  |
| Metal Wrist Band, Dual Conductor Cord, Medium         | 2385      |   |                                       | •   | •   |  |
| Metal Wrist Band, Medium                              | 2385VM    | •   | •                                     |   |   |  |
| Metal Wrist Band, Large                               | 2386      |   |                                       | •   | •   |  |
| Metal Wrist Band, Large                               | 2386VM    | •   | •                                     |   |   |  |
| Dual Conductor Wrist Band, Blue 4                     | 4720      | •   | •                                     | •   | •   |  |

### Size Key:

Small—for wrists 4<sup>1</sup>/<sub>2</sub>"–6"

Medium—for wrists 5<sup>1</sup>/<sub>2</sub>"–7<sup>1</sup>/<sub>4</sub>"

Large—for wrists >6<sup>1</sup>/<sub>2</sub>"



## Equipment Ground Monitor

The 3M™ Equipment Ground Monitor 791E is a time saving, cost effective solution for maintaining the new standards of static control safeguards through a reliable, automated data acquisition, logging, and reporting system.

Developed with the requirements of disk drive and semiconductor facilities in mind, this new continuous monitoring system communicates with the building monitoring system already in the workplace, offering early electrostatic discharge (ESD) detection of grounding problems. This saves your company valuable time and money caused by faulty or improperly grounded equipment. The monitor also allows for easy data collection, which in turn gives supervisors the information they need to make adjustments and improvements to the present ESD program by either replacing equipment or offering specialized ESD training for employees.

The 3M Equipment Ground Monitor 791E was developed as a modular cost-efficient system, thus allowing your company to purchase only the units required for your specific static control applications.

The 3M Equipment Ground Monitor 791E provides three channels to continuously measure the ground connections of manufacturing equipment and ESD worksurfaces.

### Product Features

- Modular design
- Data output
- Small and compact size
- Stainless steel case
- Visual and audible alarms
- Regulatory compliance: UL and CE



Equipment Ground Monitor 791E

| Product No. | Description  |
|-------------|--|
| <b>791E</b> | Equipment Ground Monitor<br><br>Monitor includes:<br><ul style="list-style-type: none"> <li>• Equipment Ground Monitor 791E</li> <li>• Adapter 791AC (available without AC Adapter)</li> <li>• 5-Wire Connector</li> <li>• 3M™ Dual Lock™ Mounting Fasteners</li> <li>• Chassis Ground Cord 791CG</li> </ul> |

| Product No.   | Description          |
|---------------|----------------------|
| Accessories   |                      |
| <b>791AC</b>  | AC Adapter           |
| <b>791CG</b>  | Chassis Ground Cord  |
| <b>2390</b>   | 10' Mat Ground Cord  |
| <b>791EVK</b> | Verification Kit     |
| <b>791D6</b>  | 6x6 Data Output Cord |

### 791E Properties

| Item                               | Typical Properties  |
|------------------------------------|---|
| Monitor Size                       | 1.3 x 6.3 x 3.3 in.<br>(33 x 160 x 84 mm),<br>approximate H x W x D |
| Power Supply Requirements          |   |
| Input                              | 120 Vac ±10% (North America)  |
| Outside North America              | (As required)   |
| Output                             | 18 Vdc @ 100 mA rated load  |
| Output Plug Polarization           | Center negative   |
| Output Plug Dimensions             | 5,5 mm x 2,1 mm x 9,5 mm (OD x ID x l)                              |
| Self-Ground Monitoring             | Five-wire quick disconnect screw terminal;<br>1 ohm ±20%            |
| Measurement Voltage                | Low Range : < 1 Vdc; High Range: < 12 Vdc                           |
| Measurement Current                | Low Range : < 1 mA; High Range: < 1 uA                              |
| Data Output Jack                   | RJ-11 style; 10 foot cable (optional)                               |
| Environmental Operating Conditions |   |
| Temperature                        | Max. 104°F (40°C); Min. 50°F (10°C)                                 |
| Humidity                           | Max. 75% relative humidity  |
| Accuracy                           |   |
| Fixed                              | Low range 1Ω ± 20%;<br>High range 5 M Ω ± 5%                        |
| Adjustable                         | Low range 1Ω to 100Ω ± 20%<br>High range 5 M Ω to 35 M Ω ± 5%       |
| Self-Ground Monitor (Mon)          | 1Ω - 20%  |





# Static Control Workstation Solutions

## Voltage Wrist Strap Monitor

The 3M™ Voltage Wrist Strap Monitor 791W is a time saving, cost effective solution for maintaining the new standards of static control safeguards through a reliable, automated data acquisition, logging, and reporting system.

Developed with the requirements of disk drive and semiconductor facilities in mind, this new continuous monitoring system communicates with the building monitoring system already in the workplace, offering early electrostatic discharge (ESD) detection of wrist strap problems. This saves your company valuable time and money caused by faulty or improperly worn wrist straps. The monitor also allows easy data collection, which in turn gives supervisors the information they need to make adjustments and improvements to the present ESD program by either replacing equipment or offering specialized ESD training for employees.

The 3M Voltage Wrist Strap Monitor 791W was developed as a modular cost-efficient system, thus allowing your company to purchase only the units required for your specific static control applications.

The Voltage Wrist Strap Monitor 791W is capable of grounding and monitoring two dual conductor wrist straps that plug into two separate remotes. The monitor simultaneously provides continuous monitoring of two operators by comparing the voltage on the operators to one of four internal voltage levels (1V, 3V, 6V, and 9V).

### Product Features

- Modular design
- Data output
- Small and compact size
- Stainless steel case
- Visual and audible alarms
- Regulatory compliance: UL and CE
- VM and metal bands are to be used specifically with the 791W Monitor



Voltage Wrist Strap Monitor 791W

| Product No. | Description   |
|-------------|---|
| <b>791W</b> | Voltage Wrist Strap Monitor<br><br>Monitor includes:<br><ul style="list-style-type: none"> <li>• 791W Voltage Wrist Strap Monitor</li> <li>• 791AC AC Adapter (available without AC Adapter)</li> <li>• 791WR Wrist Strap Remote</li> <li>• 791D6 Remote Interface Cable (10')</li> <li>• 791CG Chassis Ground Cord</li> <li>• 2-Wire Connector</li> <li>• 3M™ Dual Lock™ Mounting Fasteners</li> </ul> |

| Product No.   | Description   |
|---------------|---|
| Accessories   |   |
| <b>791AC</b>  | AC Adapter  |
| <b>791CG</b>  | Chassis Ground Cord   |
| <b>791WVK</b> | Verification Kit  |
| <b>791WR</b>  | Wrist Strap Remote  |
| <b>791D10</b> | 10x10 Data Output Cord  |
| <b>3057</b>   | Stand By Jack<br><br>Dual Conductor Bands and Cords<br>(see page 8 for additional information on wrist band and cord combinations.) |

### 791W Properties

| Item                                  | Typical Properties   |
|---------------------------------------|--|
| Monitor Size                          | 1.3 x 6.3 x 3.3 in.<br>(33 x 160 x 84 mm),<br>approximate H x W x D                              |
| Power Supply Requirements             |  |
| Input                                 | 120 Vac ±10% (North America)<br>(As required)  |
| Output                                | 18 Vdc @ 100 mA rated load   |
| Output Plug Polarization              | Center negative  |
| Output Plug Dimensions                | 5,5 mm x 2,1 mm x 9,5 mm (OD x ID x L)   |
| Self-Ground Monitoring                | Two-wire quick disconnect screw terminal;<br>1 ohm ±20%  |
| Wrist Strap Remotes                   | Stainless steel; 10' cables (detachable);<br>RJ-11 style mounting with 3M Dual<br>Lock Fasteners |
| Data Output Jack                      | RJ-45 style; 10 foot cable (optional)  |
| Environmental<br>Operating Conditions |  |
| Temperature                           | Max. 104°F (40°C); Min. 50°F (10°C)  |
| Humidity                              | Max. 75% relative humidity   |
| Accuracy                              |  |
| Input                                 | 1V ± 15%; 3V, 6V and 9V ± 10%  |
| Ground Disconnect                     | 1Ω ± 20%   |
| Analog Output                         | Voltage 1-5 Vdc ± 10%, 4-20 mA ± 10%   |







## Static Monitor

The 3M™ Static Monitor 790 is a cost efficient unit that is small, compact and versatile in its usage, and may be mounted directly onto device handling equipment, testers, and auto insertion equipment.

Housed in static dissipative plastic, the Static Monitor 790 works by measuring the voltage potential on a person referenced to earth ground. The monitor uses a slide switch allowing the user to select the voltage level necessary for the specific job function being performed.

The Static Monitor 790 has two wrist strap input jacks located on its front, which allows two operators to use one monitor unit at a workstation simultaneously. Power is supplied to the unit through an AC adapter.

Three distinct alarms make it easy to identify operators and the type of fault condition. The audible alarm can be adjusted to a low or high level to overcome background noise from other equipment that may be in use in the area. Ring terminals on the end of the unit's ground and chassis cords provide a permanent connection.

### Product Features

- Audible and visual alarms
- Compact system
- Select voltage alarm levels of 1V, 3V, 6V & 9V
- Static-dissipative plastic housing
- Mounts easily to ESD worksurface
- Regulatory Compliance: UL & CE
- VM fabric and metal bands are to be used specifically with the Static Monitor 790



Static Monitor 790

| Product No. | Description   |
|-------------|---|
| 790         | Static Monitor<br><br>Monitor includes: <ul style="list-style-type: none"> <li>• 790 Static Monitor</li> <li>• 790AC Adapter (available without AC Adapter)</li> <li>• 3M™ Dual Lock™ Mounting Fasteners</li> <li>• 2-Wire Connector</li> </ul> |

| Product No. | Description   |
|-------------|---|
| Accessories |   |
| 790MP       | Mounting Plate for 790 (10 per package)   |
| 790VK       | Verification Kit  |
| 3057        | Stand By Jack   |
|             | Dual Conductor Bands and Cords (see page 8 for additional information on wrist band and cord combinations.) |

### 790 Properties

| Item                               | Typical Properties  |
|------------------------------------|---|
| Monitor Size                       | 3.5 x 4.0 x 1.25 in.<br>(8,9 x 10,2 x 3,2 cm),<br>approximate H x W x D                                 |
| Power Supply Requirements          |   |
| Input                              | 120 Vac ±10% (North America)  |
| Outside North America              | (As required)   |
| Output                             | 25 Vdc @ 50 mA rated load   |
| Output Plug Polarization           | Center negative   |
| Output Plug Dimensions             | 5,5 mm x 2,1 mm x 9,5 mm (OD x ID x L)  |
| Accuracy                           | (The following parameters are valid for altitudes up to 2000 m. Pollution degree 2, Class 3, Equipment) |
| Voltage Detection Levels           | (1V ±15%) (3V, 6V, & 9V ±10%)   |
| Ground Disconnect                  | 10 ohms ±20%  |
| Environmental Operating Conditions |   |
| Temperature                        | Max. 104°F (40°C); Min. 50°F (10°C)   |
| Humidity                           | Max. 75% relative humidity  |





# Static Control Workstation Solutions

## Static Monitor

The 3M™ Wrist Strap Workstation Monitor 724 continuously verifies the resistance of the operator and worksurface ground connections. The monitor uses a reliable resistance method that actually includes the operator's skin resistance to determine if the system is operating properly. If the operator's resistance exceeds pre-set levels of 10 megohms or 35 megohms, or the wiring connections exceed 3.7 megohms, audible and visible alarms are triggered. The unit will also warn of potentially dangerous low-resistance situations. A switch allows the user to select either a 9V or 16V test voltage, and 10 megohms or 35 megohms resistance setting.

The monitor uses the light, compact dual conductor wrist strap (purchased separately; see page 16). Dual conductors provide the resistance circuit that is monitored and grounding redundancy. If one conductor fails, the other will still function to prevent sensitive components from being exposed to static.

The Wrist Strap Workstation Monitor 724 monitors a visitor to the workstation or a second operator. In addition, the loudness of the alarm is adjustable. A quick connect/disconnect Dual Remote 732 comes with the Wrist Strap Workstation Monitor.



Wrist Strap Workstation Monitor 724 pictured with 3M™ Dual Remote 732, 3M™ Dual Conductor Wrist Band 4700 and the 3M™ Dual Conductor Cord 2360. (Ground Cord and band not included)

| Product No. | Description   |
|-------------|---|
| 724         | Workstation Monitor complete with a quick connect/disconnect 732 Remote Jack and mounting hardware. |

Manufactured in ISO 9002 registered facility.  
Packaged with Certificate of Conformance.



### 724 Properties

| Item                               | Typical Properties   |
|------------------------------------|--|
| Dimensions                         | 6.5 x 3.125 x 1.375 in.<br>(16,5 x 7,9 x 3,5 cm)                               |
| Power Supply                       | 25 Vdc @ 50 mA minimum   |
| Test Voltage                       | 9 Vdc or 16 Vdc<br>(Switch selectable)   |
| Test Current                       | Less than 3 microamps  |
| Upper Resistance Limits            | Wrist Strap: 10 or 35 Megohms<br>Switch selectable<br>Worksurface: 3.7 Megohms |
| Lower Resistance Limit             | Wrist Strap: 1.5 Megohms<br>Worksurface: None                                  |
| Accuracy                           | ± 15%  |
| Environmental Operating Conditions |  |
| Temperature                        | Max. 110°F (43°C)<br>Min. 50°F (10°C)  |
| Humidity                           | Max. 75% R.H.  |
| Accessories                        | Model 733 Remote Splitter Kit<br>Model 3057 Stand-By Jack                      |

*Note: Only use 3M Dual Conductor Bands and Cords with Monitors 724 and 725. 3M workstation monitors were designed to work with the 3M Worksurfaces 8200, 8300 and 8800 Series. Other types of mats may cause the "Mat" lamp on the monitor to light. This is due to a high electrical resistance between the grounding snaps.*

*The worksurface ground resistance circuit of the 3M workstation monitor indicates a malfunction when the ground loop resistance exceeds 3.7 megohms. To determine if your mat is within this limit, perform the following procedure using an ohmmeter.*

*Measure the resistance between the snap on the mat, where you intend to connect the monitor mat cord (2380), and the ground point for the mat. Be sure the mat is connected to ground.*

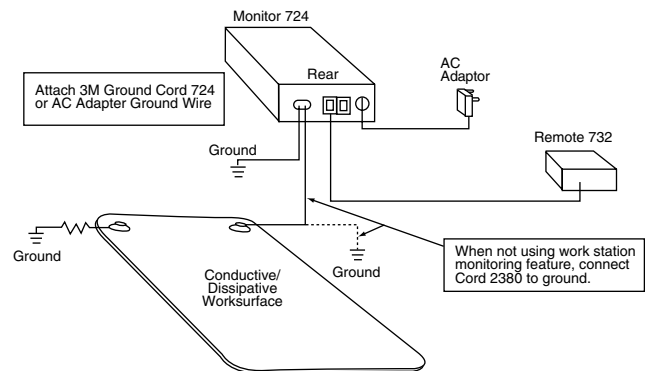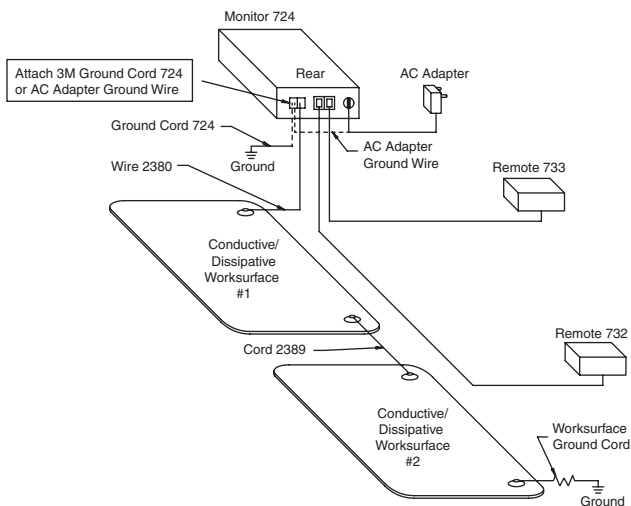

Phone: 1-800-328-1368 or www.3M.com/esd



## Dual Conductor Portable Wrist Strap Monitor

The 3M™ Wrist Strap Monitor 725 is a small, compact, battery-powered unit that continuously monitors both the worker and the worker's wrist strap. The monitor uses a reliable resistance method that includes the worker's skin resistance to determine if the system is operating properly. The monitor uses the same dual conductor wrist strap as used with the 3M™ Workstation Monitor 724. In addition, the monitor 725 also monitors the ground wire connection and battery level.

The Wrist Strap Monitor 725 immediately alerts the individual when a wrist strap is operating improperly. The monitor 725 continuously supplies a current that is returned through a wrist band and cord that contain two separate independent conductors.

The monitor is a compact, portable, battery-powered unit with a visual and an audible alarm. A "parking plate" mounted on the monitor 725 allows an individual to disconnect the ground cord and clip it to the parking plate to "silence" the alarm when moving from one work area to another. The 3M™ Belt Clip 723 is available as an accessory item and may be purchased separately.

The competitively priced Wrist Strap Monitor 725 can be used in manufacturing and field service environments. By contributing to the protection of static sensitive devices and printed circuit boards from static damage, the monitor can save money and time as a result of improved yield rates and lower field service costs.

The Wrist Strap Monitor 725 is manufactured in an ISO 9002 registered facility and ships with a Certificate of Conformance.



Wrist Strap Monitor 725



*Note: Only use 3M Dual Conductor Bands and Cords with the Monitor 725. See page 8 for additional information on wrist band and cord combinations.*

| Product No. | Description   |
|-------------|---|
| 725         | Personal and portable Wrist Strap Monitor for use in manufacturing and field service environments. The monitor 725 features wrist strap monitoring and grounding for ESD mats/work surfaces. Accessory belt clip 723 converts the monitor into a portable/personal monitor. |
| 723         | Accessories:<br>Belt Clip 723<br>Size, in. (cm)<br>2.5 x 2.625 x 1.125 (6,4 x 6,7 x 2,9)  |

### 725 Properties

| Item                               | Typical Properties  |
|------------------------------------|---|
| Dimensions                         | 2.5 x 2.6 x 1.1 in. (6,4 x 6,6 x 2,8 cm)                                    |
| Power Supply                       | 9 Volt alkaline battery (Not supplied)                                      |
| Test Voltage                       | 9 Vdc maximum   |
| Test Current                       | Less than 1 microamp  |
| Upper Resistance Limits            | Wrist Strap: 35 Megohms<br>Ground Clip: 10 Megohms                          |
| Accuracy                           | ± 15%   |
| Environmental Operating Conditions | Temperature: Max. 110°F (43°C), Min. 50°F (10°C)<br>Humidity: Max. 75% R.H. |
| Accessories                        | Belt Clip 723   |



Belt Clip 723



### Product Referral Generator

Verification Kits 724VK and 725VK..... pg. 14



# Static Control Workstation Solutions

## Monitor Verification Kits

The 3M™ Verification Kits 724VK and 725VK were designed to check the wrist strap input resistance ranges of the 700 Series Workstation, Wrist Strap, and Worksurface Monitors. The 3M™ Verification Kit 790VK contains hardware items for connecting to the 3M™ Static Monitor 790, that are recommended when performing the verification procedure. Use of this kit allows for reliable connections to the Monitor 790. In addition to this kit, a DC power supply and resistance substitution box are required (supplied by user). See instruction manual for complete details. The 3M™ Verification Kits 791EVK and 791WVK are used with the 3M™ Equipment Ground Monitor 791E and 3M™ Workstation Monitor 791W.



Verification Kit 724VK



Verification Kit 725VK



Verification Kit 790VK



Verification Kit 791EVK

| Product No. | Description   |
|-------------|---|
| 724VK       | Verification Kit<br>Six 1% Resistor Plugs and Case  |
| 725VK       | Verification Kit<br>Four 1% Resistor Plugs and Case   |
| 790VK       | Verification Kit<br>One 5' 2360 dual conductor cord, one test wrist band socket assembly, and one two-wire male connector with 24" lead wire. |
| 791EVK      | Verification Kit  |
| 791WVK      | Verification Kit  |

### 724VK Properties

| Item         | Typical Properties                                   |
|--------------|--|
| Test Plug #1 | Resistor, Metal Film,<br>1.33 Megohms ± 1%, 1/4 Watt |
| Test Plug #2 | Resistor, Metal Film,<br>1.69 Megohms ± 1%, 1/4 Watt |
| Test Plug #3 | Resistor, Metal Film,<br>8.45 Megohms ± 1%, 1/4 Watt |
| Test Plug #4 | Resistor, Metal Film,<br>11.5 Megohms ± 1%, 1/4 Watt |
| Test Plug #5 | Resistor, Metal Film,<br>29.4 Megohms ± 1%, 1/4 Watt |
| Test Plug #6 | Resistor, Metal Film,<br>40.2 Megohms ± 1%, 1/4 Watt |

### 725VK Properties

| Item         | Typical Properties                                   |
|--------------|--|
| Test Plug #1 | Resistor, Metal Film,<br>29.4 Megohms ± 1%, 1/4 Watt |
| Test Plug #2 | Resistor, Metal Film,<br>40.2 Megohms ± 1%, 1/4 Watt |
| Test Plug #3 | Resistor, Metal Film,<br>4.99 Megohms ± 1%, 1/4 Watt |
| Test Plug #4 | Resistor, Metal Film,<br>11.5 Megohms ± 1%, 1/4 Watt |



Verification Kit 791WVK



## Dual Conductor Remote Input Jacks

The 3M™ Remote Input Jack 732 may be purchased as a replacement part for the 3M™ Workstation Monitor 724. It provides two phonejacks – one for the primary worker and one for use by visitors to the work area. The 3M™ Remote Splitter Kit 733 may be purchased for use in conjunction with the Workstation Monitor 724. It offers the versatility of grounding and monitoring two workers at independent workstations that are in close proximity. The units feature a quick “connect/disconnect” system.



Remote Input Jack 732



Remote Splitter Kit 733

| Product No. | Description   |
|-------------|---|
| 732         | Replacement Remote Input Jack for the 724 Workstation Monitor.<br>6 ft. (1,8 cm) long cord.<br><br><b>Size, in. (cm)</b><br>3.188 x 1 x 1.5 (8,1 x 2,5 x 3,8) |
| 733         | Remote Splitter Kit, 6 ft. (1,8 cm) long cord.<br><br><b>Size, in. (cm)</b><br>3.188 x 1 x 1.5 (8,1 x 2,5 x 3,8)  |

## Monitor Stand-By Jack

The 3M™ Monitor Stand-by Jack 3057 allows an operator to disconnect a ground cord from the wrist band and leave the workstation without deactivating the Workstation Monitor 724 or the 3M™ Static Monitor 790. Simply detach the cord from the wrist band and plug it into the 3M Stand-by Jack 3057.



Stand-By Jack 3057

| Product No. | Description    |
|-------------|----------------|
| 3057        | Stand-By Jack. |

## Monitor/Table Mat Replacement Cord

The 3M™ Monitor/Table Mat Replacement Cord 2380 extends from the Workstation Monitor 724 to the static-control worksurface to be monitored.

The 3M™ Monitor/Table Mat Interconnect Cord 2389 is a 10 ft. straight cord with male snap fasteners at each end. It is used to interconnect two monitored worksurfaces together.



Monitor/Table Replacement Cord 2380



Monitor/Table Mat Interconnect Cord 2389

| Product No. | Description  |
|-------------|--|
| 2380        | Monitor/Table Mat Replacement Cord, 6 ft. (1,8 m). |
| 2389        | Monitor/Table Mat Interconnect Cord, 10 ft. (3 m). |

*Note: These cords do not have a resistor molded into the snap fastener cap.*



# Static Control Workstation Solutions

## Dual Conductor Fabric Wrist Straps for Monitors

The 3M™ Dual Conductor Fabric Wrist Strap 2368 is used exclusively with the 3M™ Workstation Monitor 724 and 3M™ Wrist Strap Monitor 725.

One size adjusts to any size wrist to provide reliable protection. The wrist strap features a band made of a silver plated, monofilament, continuous thread woven together with elastic nylon to maintain full conductivity, comfort and reliability, while providing rapid and continuous drain of static charge. Two-one megohm resistors are built into the ground cord. Adjustability also simplifies ordering procedures and inventory control by eliminating the need to order and stock several band sizes.



Fabric Wrist Band 2368

*Note: The 3M 2300 Series, 2300VM Series and 2200 Series bands and cords are not interchangeable. See page 8 for additional information on wrist band and cord combinations.*

| Product No. | Description  |
|-------------|--|
| 2368        | Turquoise Dual Conductor Adjustable Fabric Wrist Band.       |
| 2368VM      | Turquoise Dual Conductor Adjustable Fabric Wrist Band.       |
| 2360        | Dual Conductor Coiled Cord, 5 ft. (1,5 m) practical length.  |
| 2370        | Dual Conductor Coiled Cord, 10 ft. (3,0 m) practical length. |
| 2371        | Dual Conductor Coiled Cord, 20 ft. (6,0 m) practical length. |

### ⚠ Warning:

These products are not to be used in areas where the individual may come in contact with exposed circuitry exceeding 250 Volts AC.

These products are for static control. It will not reduce or increase your risk of receiving electrical shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the 3M Wrist Strap.
- A current limiting resistor(s) is located in these 3M Ground Cords. DO NOT REMOVE. If the resistor(s) become damaged, replace ground cord immediately.

## Dual Conductor Metal Wrist Straps for Monitors

The 3M Dual Conductor Metal Wrist Straps 2300 Series are for use exclusively with the Workstation Monitors 724 and Wrist Strap Monitor 725. These long lasting metal expansion bands are for use in clean rooms and applications requiring extended band life.

Three sizes are available: small for wrists from 4.5 in. to 6 in. (114 mm to 152 mm) in circumference; medium for wrists from 5.5 in. to 7.25 in. (140 mm to 184 mm); and large for wrists larger than 6.5 in. (165 mm).



Metal Wrist Strap 2381

*Note: The 3M Bands and Cords 2300 Series, 2300VM Series, and 2200 Series are not interchangeable. See page 8 for additional information on wrist band and cord combinations.*

| Product No. | Description  |
|-------------|--|
| 2381        | Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1,5 m) cord. (Small)  |
| 2381VM      | Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1,5 m) cord. (Small)  |
| 2382        | Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1,5 m) cord. (Medium) |
| 2382VM      | Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1,5 m) cord. (Medium) |
| 2383        | Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1,5 m) cord. (Large)  |
| 2383VM      | Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1,5 m) cord. (Large)  |
| 2384        | Dual Conductor Metal Wrist Band. (Small)   |
| 2384VM      | Dual Conductor Metal Wrist Band. (Small)   |
| 2385        | Dual Conductor Metal Wrist Band. (Medium)  |
| 2385VM      | Dual Conductor Metal Wrist Band. (Medium)  |
| 2386        | Dual Conductor Metal Wrist Band. (Large)   |
| 2386VM      | Dual Conductor Metal Wrist Band. (Large)   |
| 2360        | Dual Conductor Coiled Cord, 5 ft. (1,5 m) practical length.                      |
| 2370        | Dual Conductor Coiled Cord, 10 ft. (3,0 m) practical length.                     |
| 2371        | Dual Conductor Coiled Cord, 20 ft. (6,0 m) practical length.                     |



## Dual Conductor Wrist Bands

Made to be used in conjunction with the 3M™ Workstation Monitor 724 and the 3M™ Wrist Strap Monitor 725, the Dual Conductor Band 4720 offers several unique features to provide high-tech businesses cutting edge equipment at low cost.

The dual conductor wrist band is connected to the 3M Workstation or Wrist Strap Monitor via a 3M Dual Conductor Ground Cord 2300 Series. The cords (2360, 2370, and 2371) are sold separately to allow customers the option of purchasing a cord in 5', 10' and 20' lengths respectively.

3M's exclusive "comfort bumps" design on the conductive interior insert ensures not only increased contact with the skin, but also air flow between the band and skin, resulting in more comfort for the wearer.

Made of thermoplastic material, the Dual Conductor Wrist Bands 4720 are lightweight and low profile, making reliable contact to the skin, improving employee acceptance while providing an effective grounding device. It is well known that high contact resistance between a wrist band and arm can be attributed to improper fit, dry skin or arm hair. The pliable thermoplastic material of the Wrist Band 4720 conforms to the arm, increasing the amount of contact area. In 3M field trials with the wrist bands, reduced contact resistance between the wrist band and arm were noted. This improvement was also observed when compared to standard metal and fabric wrist bands.

The "zipper" style latching mechanism easily adjusts to any size wrist, effecting a "one size fits all," allowing for a secure and comfortable fit. After adjusting for proper fit, any excess band material is cut off. The wrist band is highly visible, making it easy for supervisors to see that the wrist straps are properly used.

The 3M™ Dual Conductor Wrist Strap Ground Cord is for use exclusively with 3M™ Dual Conductor Wrist Straps. Used in conjunction with 3M's ESD workstation monitors, the 3M Dual Conductor Cord 2300 series features an improved grip that is wider in diameter and easier to grasp when inserting and removing the cord from the remote unit. The terminations at both ends of the cord have been redesigned for a secure fit when plugged into the dual remote.

| Product No. | Color | Description                 |
|-------------|-------|-----------------------------|
| 4720        | Blue  | Dual Conductor Wrist band.* |


\*Ground Cord not included

| Product No. | Description  |
|-------------|--|
| 2360        | Dual Conductor Coiled Cord, 5 ft. (1,5 m) practical length.  |
| 2370        | Dual Conductor Coiled Cord, 10 ft. (3,0 m) practical length. |
| 2371        | Dual Conductor Coiled Cord, 20 ft. (6,0 m) practical length. |



Wrist Band 4720 with Dual Conductor Wrist Strap Ground Cord 2360

## 3M Dual Conductor Wrist Band 4700 Series

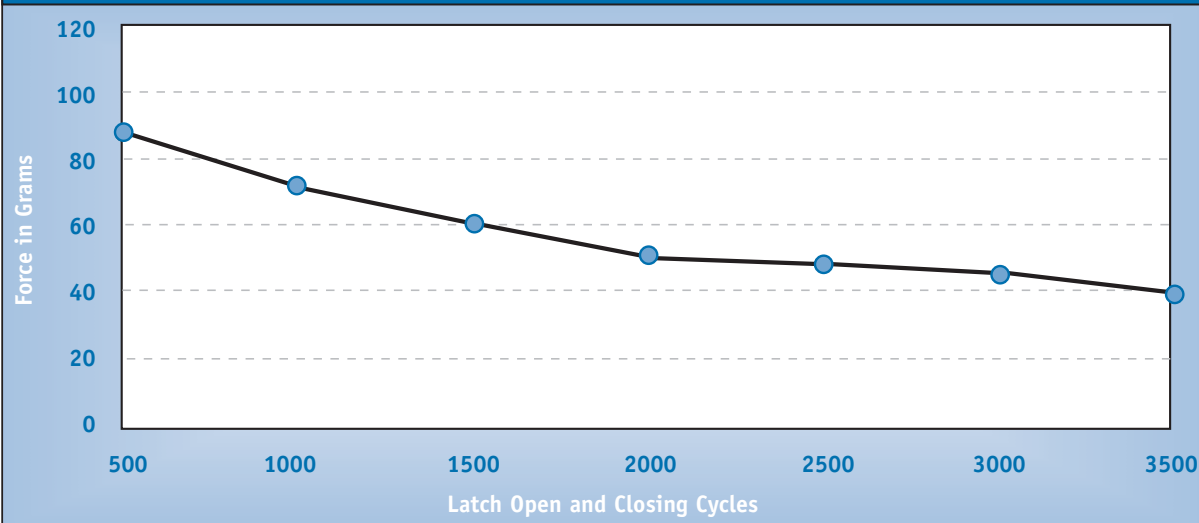



# Static Control Workstation Solutions

## Dissipative Vinyl Three-Layer Mats and Runners

3M™ Mats and Runners 8200 Series are soft table and floor mats with a unique three-layer construction. The top layer is durable static dissipative vinyl, which has sufficiently low resistance to discharge static-laden conductors, yet will prevent the shorting of pins on the backs of printed circuit boards laid on the mat. The middle layer is a highly conductive scrim that provides the main discharge path to ground, and the bottom layer is static-dissipative foam, providing a durable nonskid cushion. Nonstandard sizes are available on a custom order basis.

### Floor Mats 8200 Series

Includes one 15 ft. (4,6 m) 3M™ Ground Cord 3040 and two 3M™ Snap Fasteners 3050 (installed).

### Floor Runners 8250 Series


Includes two 15 ft. (4,6 m) 3M Ground Cords 3040 and two 3M Snap Fasteners 3050 to be installed by customer.

### Table Mats 8210 Series

Includes two 3M Snap Fasteners 3050 (installed) and one 3M™ Wrist Strap Grounding System 3048. Wrist Straps must be ordered separately.

### Table Runners 8260 Series

Includes two 15 ft. (4,6 m) 3M Ground Cords 3040 and two 3M Snap Fasteners 3050 to be installed by user.

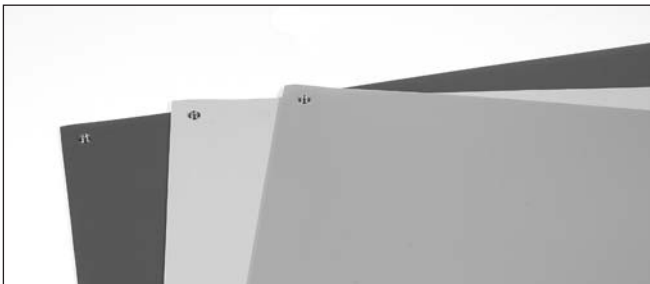

Mats and Runners 8200 Series

### Properties

| Property             | Typical Value                 |
|----------------------|-------------------------------|
| Material             | Top and Bottom Layers - Vinyl |
| Thickness            | 0.138 in. (3,5 mm)            |
| Hardness             | 40 - 50 Shore A               |
| *Resistance          |                               |
| (Surface to Ground)  | $1 \times 10^7 \Omega$        |
| (Surface to Surface) | $4 \times 10^7 \Omega$        |

\* Tested per ESD Association Standard S4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)

*Note: Non-standard sizes available on custom order basis up to 50 ft. maximum length*

| Product No. | Description          | Size, ft. (m)       |
|-------------|----------------------|---------------------|
| 8201        | Floor Mat, Brown.    | 4 x 6 (1,2 x 1,8)   |
| 8203        | Floor Mat, Gray.     | 4 x 6 (1,2 x 1,8)   |
| 8204        | Floor Mat, Blue.     | 4 x 6 (1,2 x 1,8)   |
| 8211        | Table Mat, Brown.    | 2 x 4 (0,6 x 1,2)   |
| 8213        | Table Mat, Gray.     | 2 x 4 (0,6 x 1,2)   |
| 8214        | Table Mat, Blue.     | 2 x 4 (0,6 x 1,2)   |
| 8251        | Floor Runner, Brown. | 4 x 24 (1,2 x 7,2)  |
| 8253        | Floor Runner, Gray.  | 4 x 24 (1,2 x 7,2)  |
| 8254        | Floor Runner, Blue.  | 4 x 24 (1,2 x 7,2)  |
| 8261        | Table Runner, Brown. | 2 x 24 (0,6 x 7,2)  |
| 8263        | Table Runner, Gray.  | 2 x 24 (0,6 x 7,2)  |
| 8264        | Table Runner, Blue.  | 2 x 24 (0,6 x 7,2)  |
| 8281        | Floor Runner, Brown. | 2 x 40 (0,6 x 12,2) |
| 8283        | Floor Runner, Gray.  | 2 x 40 (0,6 x 12,2) |
| 8284        | Floor Runner, Blue.  | 2 x 40 (0,6 x 12,2) |
| 8291        | Floor Runner, Brown. | 4 x 40 (1,2 x 12,2) |
| 8293        | Floor Runner, Gray.  | 4 x 40 (1,2 x 12,2) |
| 8294        | Floor Runner, Blue.  | 4 x 40 (1,2 x 12,2) |



## Product Referral Generator

- Cleaner 8001 for Static Control Mats..... pg. 24, 30
- Shoe Straps ..... pg. 6-7
- Wrist Straps..... pg. 2-5, 16-17





## Dissipative Rubber Mats and Runners

3M™ Static Dissipative Rubber Mats and Runners 8800 Series consist of a top layer of static dissipative rubber laminated to a bottom layer of conductive rubber. Both layers are made from vulcanized synthetic rubber, which offers excellent resistance to oil, grease and most common solvents. They offer superior resistance to heat and hot solder as compared to vinyl or olefinic materials. Non-standard sizes are available on a custom order basis.

### Floor Mats 8870 Series

Dissipative floor mats include one 15 ft. (4,6 m) 3M™ Ground Cord 3040 and two 3M™ Snap Fasteners 3034 (installed).

### Floor Runners 8880 Series

Dissipative floor runners include two 15 ft. (4,6 m) 3M Ground Cords 3040 and five 3M Snap Fasteners 3034 to be installed by user.

### Table Mats 8810/8820/8830 Series

Dissipative table mats include two 3M Snap Fasteners 3034 (installed) and one 3M™ Wrist Strap Grounding System 3048.

### 8840/8850/8860 Series

Dissipative table runners include two 15 ft. (4,6 m) 3M Ground Cords 3040 and five 3M Snap Fasteners 3034 to be installed by the user.



Static Dissipative Rubber Mat

| Product No. | Description        | Size, ft. (m)      |
|-------------|--------------------|--------------------|
| 8810        | Table Mat, Gray    | 2 x 4 (0,6 x 1,2)  |
| 8811        | Table Mat, Blue    | 2 x 4 (0,6 x 1,2)  |
| 8830        | Table Mat, Gray    | 3 x 4 (0,9 x 1,2)  |
| 8831        | Table Mat, Blue    | 3 x 4 (0,9 x 1,2)  |
| 8840        | Table Runner, Gray | 2 x 24 (0,6 x 7,2) |
| 8841        | Table Runner, Blue | 2 x 24 (0,6 x 7,2) |
| 8860        | Table Runner, Gray | 3 x 24 (0,9 x 7,2) |
| 8861        | Table Runner, Blue | 3 x 24 (0,9 x 7,2) |
| 8870        | Floor Mat, Gray    | 4 x 6 (1,2 x 1,8)  |
| 8871        | Floor Mat, Blue    | 4 x 6 (1,2 x 1,8)  |
| 8880        | Floor Runner, Gray | 4 x 24 (1,2 x 7,2) |
| 8881        | Floor Runner, Blue | 4 x 24 (1,2 x 7,2) |

Non-standard sizes available on custom order basis up to 50 ft. maximum length.

## Properties

| Property             | Typical Value                                  |
|----------------------|--|
| Material             | Top and Bottom Layers - Nitrile™ Rubber        |
| Thickness            | 0.065 in. (1,7 mm)                             |
| Hardness             | 60 Shore A                                     |
| *Resistance          |  |
| (Surface to Ground)  | 1 x 10 <sup>6</sup> Ω to 5 x 10 <sup>6</sup> Ω |
| (Surface to Surface) | 1 x 10 <sup>6</sup> Ω to 1 x 10 <sup>7</sup> Ω |

\* Tested per ESD Association Standard S4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)



# Static Control Workstation Solutions

## Conductive Floor Mats for Hard Floors

The main purpose of a conductive floor mat or runner is to remove static charge from personnel as they approach work areas. This could include supervisors and parts delivery personnel, as well as the worker who removes his or her wrist strap and momentarily steps away. Floor mats provide significant passive protection in well-traveled assembly areas. Continuous runners extend static protection throughout and between entire areas.

### 3M™ Floor Mat 1864

Semi-flexible conductive floor mat that contains a rubber filler for resilience. It also has a textured surface for better traction. It includes two 3M Snap Fasteners 3034 (installed) and one 15 ft. (4,6 m) 3M Ground Cord 3040 with a 1 megohm resistor.

### Floor Runner 1864R

The 3M™ Floor Runner 1864R is a 50 ft. long runner of the mat material 1864. It includes two 15 ft. (4,6 m) 3M Ground Cords 3040 with 1 megohm resistor, five 3M Snap Fasteners 3034 and one 3M Snap Fastener Installation Tool.



Floor Mat 1864

*Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.*

| Product No. | Description  |
|-------------|--|
| 1864        | Floor Mat.<br>0.125 in. (3,2 mm) thick.                |
|             | Size ft. (m)   |
|             | 4 ft. x 6 ft. (1,2 x 1,8)<br>4 ft. x 8 ft. (1,2 x 2,4) |
| 1864R       | Floor Runner.<br>0.125 in. (3,2 mm) thick.             |
|             | Size ft. (m)   |
|             | 2 x 50 (0,6 x 15,0)                                    |

Conductive floor mats 1864 are black.  
Nonstandard sizes are available on a custom order basis.

### Properties

| Property             | Typical Value         |
|----------------------|-----------------------|
| Material             | EVA Copolymer/Rubber  |
| Thickness            | 0.125 in. (3,2 mm)    |
| Hardness             | 80-85 Shore A         |
| *Resistance          |                       |
| (Surface to Ground)  | 9 x 10 <sup>2</sup> Ω |
| (Surface to Surface) | 6 x 10 <sup>2</sup> Ω |
| **Resistivity        | 10 <sup>2</sup> Ω-cm  |


\* Tested per ESD Association Standard S4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)  
\*\*Tested per ASTM D 257



## Dissipative Hard Laminate Sheets

3M™ Dissipative Hard Laminate Sheets are used where a hard, durable, electrically safe surface is needed, providing a low coefficient of friction to permit heavy objects to slide easily. Controlled conductivity (surface-to-ground) eliminates shock hazard when working on a powered component.

This material is post-formable with normal high pressure laminate process techniques used by furniture makers. Using this technique, a tight 0.5 in. (12,7 mm) radius is possible, which allows installation without seams in corners and over rounded edges when forming parallel to sanding lines. The laminate can provide a comfortable rounded front on which personnel can rest their arms. It is resistant to common solvents and to hot solder droppings.

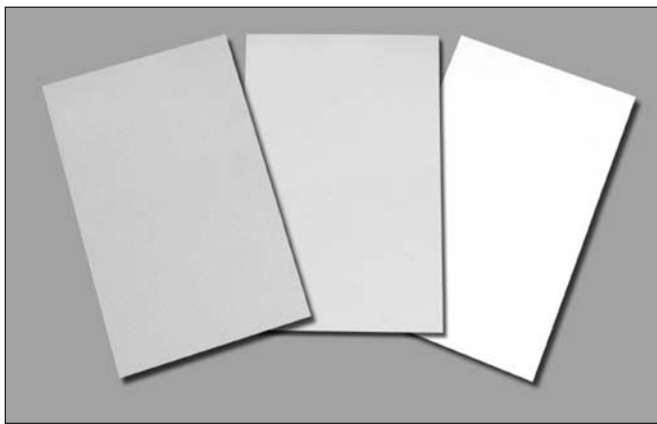

Dissipative Hard Laminate Sheets

*Note: For consistent static charge dissipation from rigid, conductive flat-bottomed totes and trays, use of a pad or mat of 3M Dissipative Hard Laminate material 8200 in conjunction with this static-protective hard laminate is suggested, especially in areas where relative humidity often drops below 30%.*

| Product No. | Color | Size, ft. (m)      |
|-------------|-------|--------------------|
| 8360        | Beige | 4 x 8 (1,2 x 2,4)  |
|             |       | 3 x 12 (0,9 x 3,7) |
|             |       | 5 x 12 (1,5 x 3,7) |
| 8365        | Gray  | 4 x 8 (1,2 x 2,4)  |
|             |       | 3 x 12 (0,9 x 3,7) |
|             |       | 5 x 12 (1,5 x 3,7) |
| 8375        | White | 5 x 12 (1,5 x 3,7) |

Nonstandard sizes and colors are also available, subject to minimum order quantity.

### Properties

| Property             | Typical Value                |
|----------------------|------------------------------|
| Thickness            | 0.037 in. (0,94 mm)          |
| Hardness             |                              |
| Abrasion resistance: | > 1500 cycles Tabor Wheel 32 |
| *Resistance          |                              |
| (Surface to Ground)  | 7 x 10 <sup>6</sup> Ω        |
| (Surface to Surface) | 6 x 10 <sup>7</sup> Ω        |

\* Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)



## Product Referral Generator

|   |                |
|---|----------------|
| Wrist Straps.....                         | pg. 2-5, 16-17 |
| Monitors.....                             | pg. 8-13       |
| Cleaner 8001 for Static Control Mats..... | pg. 24, 30     |

## Dissipative Rigid Worksurfaces

3M™ Static Dissipative Rigid Worksurface 8300 Series have the high abrasion resistance of a laminate, yet are as easy to install as table mats. The nonglare surface also resists staining, scorching and common solvents. All edges and corners are rounded, and the laminate comes ready to use with two factory-installed snap fasteners, and one 3M™ Grounding System 3048 for wrist strap/table mat.



Rigid Worksurface 8300 Series

| Product No. | Color | Size, in. (cm)                        |
|-------------|-------|---------------------------------------|
| 8343        | Beige | 0.125 x 24 x 36 (0,32 x 61,0 x 91,0)  |
| 8344        | Gray  | 0.125 x 24 x 36 (0,32 x 61,0 x 91,0)  |
| 8353        | Beige | 0.125 x 24 x 48 (0,32 x 61,0 x 122,0) |
| 8354        | Gray  | 0.125 x 24 x 48 (0,32 x 61,0 x 122,0) |



## Product Referral Generator

|  |            |
|--|------------|
| Cleaner 8001 for Static Control Mats.....        | pg. 24, 30 |
| Dissipative Rubber Mats/Runners 8800 Series..... | pg. 19     |
| Static Conductive Floor Tile 8400 Series.....    | pg. 66-67  |
| ESD Epoxy Flooring 8900 Series.....              | pg. 68-69  |
| Anti-Fatigue Mats/Runners 9500 Series.....       | pg. 22     |



# Static Control Workstation Solutions

## Anti-Fatigue Mats

3M™ Anti-Fatigue Matting 9500 Series may be the simplest and most effective way to reduce standing worker fatigue while providing ideal protection against static electricity problems. Physical fatigue is reduced by encouraging subtle movement of leg and calf muscles, which in turn promotes blood flow back to the heart. The use of 3M Anti-Fatigue Mats/Runners 9500 is designed to result in more comfortable, more productive workers.

The anti-fatigue mats/runners have excellent static-control properties. They are carbon loaded rubber with the carbon being mixed evenly throughout the material to ensure the edges are as conductive as the center. Resistance from the surface of the mat to the grounding point – the truest measure of the mat's static draining capability – is typically in the range of  $2.5 \times 10^4$  to  $1 \times 10^7$  ohms (measured according to ESD Standard 7.1).

The rubber surface is bonded to a highly resilient insulative sponge base. This construction provides outstanding cushioning, and reduces stress on the spine and lower back muscles, which reduces worker fatigue.

3M mats/runners 9500 Series can be cleaned by all common commercial detergents (3M Cleaner 8001 for Static Control Mats), and may be either scrubbed with a brush or damp mopped. Let dry before returning to service.



Anti-Fatigue Mat 9500

### Values

| Features   | Advantages   | Benefits  |
|--|--|---|
| Rubber surface bonded to highly resilient sponge base. | Exceptional comfort<br>Long lasting<br>Easy to clean | Reduce worker fatigue;<br>May improve productivity; durable and low maintenance |
| Carbon filled (conductive)                             | Excellent static dissipation                         | Reliable grounding  |
| Heavy  | Will stay in place                                   | Customer acceptance   |
| Smooth surface maintenance                             | Easy to clean  | Low cost  |
| Custom sizes available                                 | Better meet application needs                        | User acceptance   |

| Product No. | Description   | Size, ft. (m)                   |
|-------------|---|---------------------------------|
| 9500        | Static Control Anti-Fatigue Mat (includes one installed ground snap and one 15' ground cord)                                      | 3 x 5 (0,9 x 1,5)               |
| 9510        | Static Control Anti-Fatigue Mat (includes one ground snap installed every 15 linear feet with appropriate number of ground cords) | 3 x up to 75 (0,9 x up to 22,9) |

Note: Anti-Fatigue Mat 9510 non-standard sizes available on custom order basis.

### Properties

| Property                          | Test Method               | Typical Value  |  |
|-----------------------------------|---------------------------|--|--|
| Material                          | Top Layer<br>Bottom Layer | Carbon Filled Styrene Butadiene Rubber<br>- 100% Natural Rubber  |  |
| Electrical                        | ESD-S7.1                  | $2.5 \times 10^4$ to $1 \times 10^7$ ohms (surface to ground resistance)   |  |
| Thickness                         | Caliper                   | 0.5 in.  |  |
| Flammability                      | ASTM D 2859               | Non-burning  |  |
| Tensile Strength                  | 3M                        | 630 PSI  |  |
| Durometer                         | Shore A                   | 82   |  |
| Coefficient of Friction           | ASTM 2047                 | Surpasses ADA and OSHA Recommendations   |  |
| Temperature                       | 3M                        | 5 to 40°C  |  |
| Compression Strength (Resiliency) | ASTM 1667                 | Recovery after 30 minutes = 80%<br>Recovery after 24 hours = 69%   |  |
| Chemical Deflection               | ASTM 1056                 | 3.0 - 5.0 PSI  |  |
| Compression Set                   | ASTM 1056                 | Recovery after 24 hours = 77%  |  |
| Chemical                          | ASTM D 543                | Acetone<br>Detergent<br>Heptane<br>Gasoline<br>Isopropanol<br>Mineral Oil<br>Mineral Spirits<br>Potassium Hydroxide<br>Sodium Hydroxide<br>Trichloroethylene<br>Xylene | No visual effect<br>No visual effect<br>No visual effect<br>No visual effect<br>No visual effect<br>No visual effect<br>No visual effect<br>No visual effect<br>No visual effect<br>No visual effect |



Anti-Fatigue Mat 9500



Anti-Fatigue Mat ground snap



## Workstation Grounding Kits

Each 3M™ Workstation Grounding Kit provides the basic items needed to create a static-safe work environment. They include a floor mat, table mat, adjustable wrist strap with grounding cord and accessories to properly connect all of the kit components.

Each kit contains:

- Table Mat; 2 ft. x 4 ft. (0,6 m x 1,2 m)
- Floor Mat; 4 ft. x 6 ft. (1,2 m x 1,8 m)
- 3M™ Ground Cord 3040; 15 ft. (4,6 m)
- 3M™ Grounding System 3048 for Wrist Strap/ Table Mat
- 3M™ Adjustable Wrist Strap 2214

### Workstation Grounding Kit 8020 Series

The 3M Workstation Grounding Kits 8020 provide the complete static protection offered by all the 3M kits. Both the floor and table mats (8200) are made from our soft three-layer static dissipative material.

### Workstation Grounding Kit 8030 Series


These kits contain two different types of static control mats. The table mat is made of the soft three-layered, static dissipative material 8200, while the floor mat (1864) is of the more rigid, conductive material.

| Product No. | Description  |
|-------------|--|
| 8021        | Brown Table and Floor Mat, 3-layer construction.   |
| 8023        | Gray Table and Floor Mat, 3-layer construction.    |
| 8024        | Blue Table and Floor Mat, 3-layer construction.    |
| 8031        | Brown 3-layer Table Mat, Black Velostat Floor Mat. |
| 8033        | Gray 3-layer Table Mat, Black Velostat Floor Mat.  |
| 8034        | Blue 3-layer Table Mat, Black Velostat Floor Mat.  |




## Product Referral Generator

Test Kit 701 ..... pg. 27, 52  
 Wrist Strap Workstation Monitor 724 ..... pg. 12

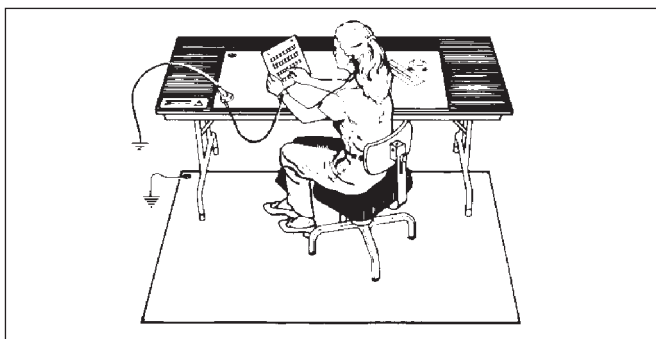

8021-8024

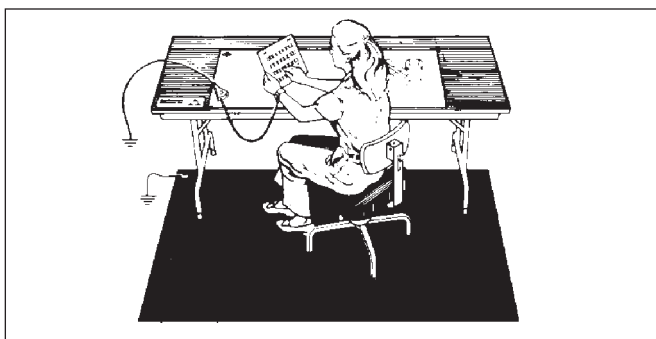

8031-8034

*Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life. Not recommended for use with chairs that have wheels.*



# Static Control Workstation Solutions

## Worksurface Cleaning Products

The 3M™ Cleaner 8001 for static control mats is an extra-strength fluid that removes ordinary dirt and grime as well as difficult spots and stains from all types of static control surfaces, such as table mats, floor mats, hard-laminate benchtops, portable field-service kit work surface, etc. Unlike many cleaning products, the 3M Cleaner 8001 is not corrosive, per FTMS 101C, Method 3005, and leaves no tacky residue that attracts dirt, attacks delicate parts, or increases the contact resistance of the surface. It is a clear, colorless, homogeneous, water-based liquid that contains detergents, conditioners and other cleaning additives and has a fresh, clean scent.

3M laboratory tests have proven the cleaner to be an excellent topical antistat, maintaining a consistent surface resistivity ( $1 \times 10^{11}$  ohms/square) over extended periods in both normal (55% RH) and dry (13% RH) environments. Simply spray on any washable surface and wipe off with a clean cloth or sponge—no rinsing required. The cleaner is designed to be used full-strength and supplied in handy quart spray bottles. Also available in a five-gallon jug with spigot.

| Product No. | Description                                      |
|-------------|--|
| 8001        | Cleaner for Static Control Mats.                 |
|             | Size<br>1 quart spray (32 oz.)                   |
|             | 5-gallon jug with spigot<br>Shelf life two years |



Cleaner 8001 for Static Control Mats

## Clean Walk Mats

3M™ Clean Walk Mats 5830 remove dirt and contaminants from shoe soles, wheels and other passing objects on contact. When the top sheet becomes soiled, it can be peeled back to reveal a clean adhesive sheet underneath.



Clean Walk Mat 5830

| Product No. | Description                       |
|-------------|-----------------------------------|
| 5830        | Clean Walk Mats, 30 mats per pad. |
|             | Size, in. (cm)                    |
|             | 18 x 36 (45,7 x 85,7)             |
|             | 18 x 45 (45,7 x 114,3)            |
|             | 25 x 45 (63,5 x 114,3)            |



## Field Service Kits

Sensitive microelectronic components can be damaged, even destroyed, by one ever-present enemy – static electricity. Electronic equipment is especially susceptible to static electricity during servicing.

Static-dissipative products manufactured by 3M are designed to provide protection at a variety of field service sites, from typical office environments to remote telephone terminals. The standard field service kit quickly and reliably removes any static charge on the technician and provides a durable, static-free surface upon which to lay parts. The

lightweight version offers the same protection in a flexible, compact package. The telephone terminal service kit is especially designed to be installed at remote telephone switches or CEVs to ensure convenient static protection on site.

Practicing proper static control in the field can save time, money, and aggravation for both your customers and your company. Enable your technicians to do the job right the first time – safely and productively – with a static-dissipative portable field service kit from 3M.

## Portable Field Service Kit

The 3M™ Portable Field Service Kit 8501 provides effective static protection in a compact package for the electronics field technician. The entire kit folds to a size that fits easily into most tool cases. Two pockets sewn into the worksurface provide storage for the cords.



Field Service Kit 8501

| Product No. | Description   |
|-------------|---|
| <b>8501</b> | Static-Dissipative Portable Field Service Kit.<br><br>Kit includes:<br><ul style="list-style-type: none"> <li>• Static-Dissipative Worksurface<br/>0.021 in. x 22 in. x 24 in.<br/>(0,53 mm x 56 cm x 61 cm)</li> <li>• Ground Cord Assembly 3051</li> <li>• Alligator Clip 3038</li> <li>• Adjustable Wrist Band 2204</li> </ul> |

Custom logo imprinting on the worksurface is available.

### 8501 Properties

| Typical Property                   | Value  |
|------------------------------------|--|
| Resistance:<br>(Surface-to-ground) | $1 \times 10^6 \Omega$ to $1 \times 10^9 \Omega$ |

Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M™ Test Kit 701 for Static Control Surfaces (Megohmmeter).

## Telecommunications Field Service Kit

The 3M™ Static-Dissipative Field Service Kit 8502 is a specially designed static-dissipative kit for installation in remote, unattended telephone switching enclosures.

The worksurface has a strip of 3M™ Hook and Loop Fastener Tape stitched to the back so it can be left suspended from the permanently mounted instruction sign.



Field Service Kit 8502

| Product No. | Description  |
|-------------|--|
| <b>8502</b> | Static-Dissipative Field Service Kit for remote, unmanned telephone switching sites.<br><br>Kit includes:<br><ul style="list-style-type: none"> <li>• Static-Dissipative worksurface<br/>0.021 in. x 8.75 in. x 24 in.<br/>(0,53 mm x 22,2 cm x 61 cm)<br/>with two pockets</li> <li>• Two 5 ft. (1,5m) coiled ground cords;<br/>one for mat, one for wrist band</li> <li>• Adjustable Wrist Band 2204</li> <li>• Static Caution Sign</li> <li>• Plastic Instruction Sign</li> </ul> |

### 8502 Properties

| Typical Property                   | Value  |
|------------------------------------|--|
| Resistance:<br>(Surface-to-ground) | $1 \times 10^6 \Omega$ to $1 \times 10^9 \Omega$ |

Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M™ Test Kit 701 for Static Control Surfaces (Megohmmeter).



# Static Control Workstation Solutions

## Portable Field Service Kit

The 3M™ Portable Field Service Kit 8505 is a small, lightweight kit that offers the same level of static control as the full-sized 3M™ Field Service Kit 8501, yet is small enough to fit in a shirt pocket.



Field Service Kit 8505

### Product No.

### Description

**8505**

Lightweight Portable Field Service Kit.

Kit includes:

- Static-Dissipative Worksurface with Pocket  
0.015 in. x 15 in. x 20 in.  
(0,38 mm x 38 cm x 51 cm)
- Adjustable Wrist Band 2204
- Lightweight Heavy-Duty Coiled Ground Cords:  
Wrist Strap Ground Cord 2240, 5 ft. (1,5 m)  
Extension Ground Cord 2243, 5 ft. (1,5 m)  
Worksurface Ground Cord3063, 5 ft. (1,5 m)
- Alligator Clip 3038

Custom logo imprinting on the worksurface is available.

### 8505 Properties

#### Typical Property

#### Value

|                                    |  |
|------------------------------------|--|
| Resistance:<br>(Surface-to-ground) | $1 \times 10^6 \Omega$ to $1 \times 10^9 \Omega$ |
|------------------------------------|--|

Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M™ Test Kit 701 for Static Control Surfaces (Megohmmeter).

## Portable Field Service Kit

The 3M™ Field Service Kit 8507 with a 3M™ Wrist Strap Monitor 725 bundles together two static control products to give a field technician the same continuously monitored, static protected working environment as that enjoyed by workers in a manufacturing facility.



Field Service Kit 8507

### Product No.

### Description

**8507**

Portable Field Service kit includes Wrist Strap Monitor 725 and Dual Conductor Wrist Strap

Kit includes:

- Static-Dissipative Worksurface, foldable, 0.021" x 22" x 24" red with gray cotton edging. Two pockets, each 8" x 11" ground snap.
- Portable Wrist Strap Monitor 725, 2.5" x 2.6" x 1.1", black. Battery-powered, 9V (not included). Ground cord, 6', with ground clip. Ground snap on unit to connect to the worksurface.
- Dual-Conductor Fabric Wrist Band 2368, adjustable.
- Dual-Conductor Wrist Strap Ground Cord 2370, 10'.





## Test Kits for Static Control Surfaces

The 3M™ Test Kit 701 contains a lightweight, user-friendly megohmmeter plus all of the components needed to make testing mats and other surfaces simple and accurate. All of the items are packaged in a foam-lined carrying case.

The kit meets the intent of ANSI/ESD Standard 4.1, “Worksurfaces – Resistive Characterization.” ANSI/ESD Standard 7.1, “Floor Materials – Resistive Characterization of Materials,” and MIL-PRF-87893, “Workstation, Electrostatic Discharge (ESD) Control,” for auditing purposes. The meter has separate scales and test settings for measuring surface-to-ground and surface-to-surface resistance at two prescribed test voltages (10V and 100V), and system continuity. The easy to read scales are both color-coded and numbered.



Test Kit 701



### Product Referral Generator

|  |           |
|--|-----------|
| Floor Mats/Runners 8200 Series.....              | pg. 18    |
| Dissipative Rubber Mats/Runners 8800 Series..... | pg. 19    |
| Anti-Fatigue Mats/Runners 9500 Series.....       | pg. 22    |
| Static Conductive Floor Tile 8400 Series.....    | pg. 66-67 |
| ESD Epoxy Flooring 8900.....                     | pg. 68-69 |

| Product No.  | Description  |
|--------------|--|
| <b>701</b>   | Test Kit for Static Control Surfaces. (Certified and non-certified)<br><br>Kit contains:<br><ul style="list-style-type: none"> <li>• 1 Megohmmeter 12 oz. (340 g)<br/>1.8 x 3.3 x 4.6 in. (4,57 x 8,38 x 11,68 cm)</li> <li>• 2 Test Weights 5 lbs. (2,27 kg) each</li> <li>• 2 Test Leads, 10 ft. (3 m) each</li> <li>• 1 Insulated Bulldog Clip</li> <li>• 1 Alligator Clip</li> <li>• 1 Continuity Test Plate</li> <li>• 2 Batteries (22.5V and 1.5V)</li> <li>• 1 Operator's Manual</li> <li>• 1 Molded Carrying Case</li> </ul> |
| <b>701-L</b> | Test Leads   |
| <b>701-M</b> | Megohmmeter only   |
| <b>701-W</b> | 5 lb. Test Weight  |

#### Test Kit Properties

| Product                | Item  | Typical Properties   |
|------------------------|---|--|
| Kit                    | Weight:   | 14 pounds (6,35 kg)  |
|                        | Case Dimensions:  | 5.125" x 10" x 13.5"<br>(13,02 cm x 25,4 cm x 34,29 cm)                                  |
|                        | Case Material:  | Blow-molded, high density polyethylene with foam inserts                                 |
|                        | Case Color:   | Gray   |
| Meter                  | Weight:   | 12 ounces (0,34 kg)  |
|                        | Dimensions:   | 1.8" x 3.3" x 4.6"<br>(4,57 cm x 8,38 cm x 11,68 cm)                                     |
|                        | Resistance Ranges:                                      |  |
|                        | Continuity Test Mode                                    | 0 – 10M Ω (internal R=500 K Ω)   |
| 10V Surface Test Mode  | 10 <sup>5</sup> – 10 <sup>11</sup> Ω (internal R=2 M Ω) |  |
| 100V Surface Test Mode | 10 <sup>5</sup> – 10 <sup>11</sup> Ω (internal R=2 M Ω) |  |
| Weights                | 2 Test Weights:   | 5 pounds (2,27 kg) each  |
|                        | Dimensions:   | Diameter – 2.5 in. (6,35 cm)<br>Height – 5.06 in. (12,85 cm);<br>includes handle and pad |
|                        | Pad Material:   | Conductive silicone rubber   |
| Pad Dimensions:        | Pad Dimensions:   | Diameter – 2.5 in. (6,35 cm)<br>Thickness – 0.25 in. (0,64 cm)                           |
|                        |   |  |
| Leads                  | Length:   | 10 feet (3,05 m)   |
|                        | Wire Size:  | 18 gauge   |
|                        | Insulation:   | Silicone rubber  |
|                        | Diameter:   | 0.125" (0,32 cm)   |
| Power Supply           | Batteries (2):  | 22.5 volt (Eveready #505 or equivalent) and 1.5 volt (AA).                               |













# Static Control Workstation Solutions

## Product No. Description

|   |               |   |
|---|---------------|---|
|    | <b>723</b>    | Accessory Belt Clip to be used with the 3M™ Wrist Strap Monitor 725.  |
|    | <b>724P</b>   | Power supply for Monitor 724 and Static Monitor 790.  |
|    | <b>724VK</b>  | Verifies the resistance range of the Workstation Monitor 724.   |
|    | <b>725VK</b>  | Verifies the resistance range of the Monitor 725.   |
|    | <b>732</b>    | Replacement Remote Input Jack. 6 ft. (1,8 m) long cord. To be used with Workstation Monitor 724.  |
|  | <b>733</b>    | Remote Splitter Kit. 6 ft. (1,8 m) long cord. To be used with Workstation Monitor 724.  |
|  | <b>740P</b>   | Power Supply for 740.   |
|  | <b>790VK</b>  | Verification Kit. One 5' 2360 dual conductor cord, one test wrist band socket assembly, and one two-wire male connector with 24" lead wire. |
|  | <b>791CG</b>  | Chassis Ground Cord   |
|  | <b>791D6</b>  | 6x6 Data Output Cord  |
|  | <b>791D10</b> | 10x10 Data Output Cord  |



| Product No.   | Description  |
|---|--|
|    | <p><b>791WVK</b> Verifies the resistance range of the Voltage Wrist Strap Monitor 791.</p>   |
|    | <p><b>791EVK</b> Verifies the resistance range of the Equipment Ground Monitor 791.</p>  |
|    | <p><b>2380</b> Monitor/Table Mat Replacement Cord, 6 ft. (1,8 m), with 10 mm snap. Extends from the Workstation Monitor 724 to the static control worksurface to be monitored. This cord does not have a resistor molded into the snap fastener cap.</p> |
|    | <p><b>2389</b> Monitor/Table Mat Interconnect Cord, 10 ft. (3 m), with 10 mm snap. A straight cord with male snap fasteners at each end, and no resistors. Used to interconnect two monitored worksurfaces.</p>  |
|  | <p><b>2390</b> Mat Replacement Cord for use with 791E, 10 ft. (3 m) with 10 mm snap. Extends from the Equipment Ground Monitor 791E to the static control worksurface to be monitored.</p>   |
|  | <p><b>3033</b> Snap Fastener, male, 0.125 in. (3,2 mm) hole, 10 mm diameter. For mats and runners.</p>   |
|  | <p><b>3034</b> Snap Fastener, female, 0.125 in. (3,2 mm) hole, 10 mm diameter. For mats and runners.</p>   |
|  | <p><b>3037</b> Insulated Bulldog Clip. Fits standard banana plug.</p>  |
|  | <p><b>3038</b> Uninsulated Alligator Clip. Fits standard banana plug.</p>  |
|  | <p><b>3040</b> Ground Cord, 15 ft. (4,6 m), with 10 mm snap. Molded-in male snap fastener with integral 1-megohm resistor on one end, solderless terminal on other. Connects all 3M™ static control mats and runners to building ground.</p>             |



# Static Control Workstation Solutions

Product No. Description

|  |  |
|--|--|
|  | <p><b>3041</b> Grounding Kit for Static Protective Hard Laminate includes #10 screw, lock washer, #10 nut, lock washer wing nut, #10 self-tapping screw and one 10 ft. (3,0 m) ground cord. Ground cord has a 1-megohm resistor.</p>   |
|  | <p><b>3042</b> Wrist Strap Grounding System. Grounds two single conductor wrist straps and conveniently mounts beneath the edge of most work benches. Comes complete with 10 ft. (3,0 m) ground cord.</p>  |
|  | <p><b>3043</b> Interconnect Cord 5 ft. (3,5 m), with 10 mm. Snap molded-in male snap fastener at each end. Connects all 3M™ static control mats and runners to each other. Ground cord has a 1-megohm resistor.</p>  |
|  | <p><b>3047</b> Common Point Grounding System, 10 ft (3m) to ground workstation components. Single-row, six-terminal strip, protective cover, three cable clips. Ground cord has a 1-megohm resistor.</p>   |
|  | <p><b>3048</b> Grounding System for Wrist Strap/Table Mat. Easily snaps onto mats and runners, (10 mm snap); grounds two single conductor wrist straps. Comes complete with ring connector and 15 ft. (4,6 m) ground cord. Ground cord has a 1-megohm resistor for mat connection only.</p>  |
|  | <p><b>3050</b> Snap Fastener, female, 10 mm diameter. For 3M™ table and floor mats and runners 8200 series.</p>  |
|  | <p><b>3051</b> Ground Cord with center snap for standard field service kits. Wrist strap cord section 10 ft. (3,0 m) and ground cord section 5 ft. (1,5 m). Each contains a 1-megohm resistor.</p>   |
|  | <p><b>3057</b> Monitor Stand-By Jack. Allows operator to disconnect a ground cord from the wrist band and leave the workstation without deactivating the 3M™ Workstation Monitor 724 or 3M Static Monitor 790.</p>   |
|  | <p><b>8001</b> Cleaner for Static Control Mats. One quart (32 oz.) trigger-spray bottle or 5-gallon jug with spigot. An extra-strength cleaner for removing dirt and stains from all types of static control surfaces, including table and floor mats, hard laminate bench tops and portable field service kits. It will also remove difficult grime from epoxy or tile flooring. Used full strength, it is a clear, colorless, water-based liquid that leaves no tacky or corrosive residue. Read all Health Hazard Precautionary and First Aid statements found in the Material Safety Data sheet and/or product label prior to handling or using. Refer to <a href="http://www.3M.com">www.3M.com</a> to obtain copy of MSDS.</p> |

Phone: 1-800-328-1368 or [www.3M.com/esd](http://www.3M.com/esd)



## High Performance Scotch-Brite Cloth

The 3M™ Scotch-Brite™ High Performance Cloth 2011 is an efficient cleaning tool consisting of microfibers in a unique knit pattern. The Scotch-Brite High Performance Cloth is specifically designed with a unique combination of bi-component microfibers and knit construction. This combination provides excellent dust, oil, and water pickup with minimal linting. The bi-component aspect of the microfibers allows for both oil and water absorption while the microfiber's ribbon-like shape provides the maximum surface area for the collection of dust, oil, and water. The unique knit pattern of tufts and valleys allows both small and large particulates to be trapped within the Scotch-Brite High Performance Cloth. The combination of microfiber and knit construction provide a versatile non-scratching tool allowing the Scotch-Brite Cloth to be used on a wide variety of substrates including delicate surfaces.

The Scotch-Brite High Performance Cloth may be used dry or damp, with or without cleaning chemicals.



Scotch-Brite™ High Performance Cloths 2011

| Product No. | Description  |
|-------------|--|
| 2011        | 50 Scotch-Brite™ High Performance Cloths per case. |
|             | Examples of Intended Use                           |
|             | Fingerprint removal from glass                     |
|             | Removing glaze and polish from painted metals      |
|             | Polishing furniture                                |
|             | Cleaning and polishing brass                       |
|             | Dust removal                                       |
|             | Standard Size                                      |
|             | 12.6 in X 14.2 in (32 cm X 36 cm)                  |
|             | Colors   |
|             | Blue   |
|             | Green  |
|             | Red  |
|             | Yellow   |
|             | White  |

*Note: The 3M Scotch-Brite High Performance Cloth 2011 does not have static dissipative properties.*

### Physical Characteristics

| Property                                       | Typical Value   | Test Method          |
|--|---|----------------------|
| Size:  | 12.6 in X 14.2 in (32 cm X 36 cm)   | HCC-TM-69            |
| Thickness                                      | 0.062 in (1,57 mm)  | HCC-TM-69            |
| Weight:  | 1.09 oz (30,8 g)  | HCC-TM-69            |
| Fiber Type                                     | Polyester and nylon   |                      |
| Tuft density                                   | 37 per square cm  | HCC-TM-86            |
| Water absorption                               | 7.2 g water per g wipe  | HCC-TM-73            |
| Oil absorption                                 | 7.1 g oil per g wipe  | HCC-TM-73            |
| Artificial Sebum removal (Artificial skin oil) | 98% gloss recovery  | HCC-TM-90            |
| Drag (dry, kinetic coefficient)                |   | HCC-TM-75 (modified) |
|  | Glass 0.85  |                      |
|  | Formica 0.41  |                      |
| Tear resistance (6400 g pendulum)              |   | HCC-TM-75            |
|  | Machine Direction 5570 gram force   |                      |
|  | Cross Direction 4290 gram force   |                      |
| Resistant to                                   | Household Ammonia<br>Household Bleach<br>Household Cleaner/Degreaser<br>Vinegar<br>Mineral Oil<br>Vegetable Oil |                      |
| Linting  | Minimal   |                      |
| Laundering                                     | Launderable to 95°C (200°F)   |                      |



# Static Control Workstation Solutions

## Overhead Air Ionizer

Using steady-state DC technology, the 3M™ Overhead Air Ionizer 990 enables consistent static control coverage. With its overhead mounting system, the 990 does not compromise valuable space on the workbench, allowing for neutralization of static charge. The ionizer's steady-state DC ion emission enables fast discharge with low air-flow, providing a more comfortable work environment for operators. Emitter points are placed behind the fan to eliminate field-induced charge and to ensure a homogeneous mixture of ionized air. Also featured in the Air Ionizer 990 are open-cell foam filters on fan intakes that protect the internal components from environmental contamination.



### Overhead Air Ionizer 990

#### Electrical Specifications

|                           |  |
|---------------------------|--|
| Ion Emission and Balance* | Steady-state $\pm$ DC; Self-balancing to within $< \pm 20$ V at 24" (61 cm)  |
| Emitter Points            | 0.012" diameter tungsten wire, internally shielded   |
| Discharge Time*           | Ionizer will discharge a charged plate from 1000 volts to 100 volts in ten (10) seconds ( $\pm 1$ second) at 24" (61 cm) directly below fans |
| Air Flow Volume           | 112 CFM (per fan, free-air typical)  |
| Air Filters               | Replaceable open-cell foam   |
| Coverage Area             | 2' x 3', typical, directly under blower  |
| Audible Noise*            | 58 dB, fans at high speed  |
| Input Power               | 100-240 VAC $\pm 10\%$ , 50/60 Hz, 40 watts max; Input current: 0.4 amps max   |
| Controls                  | Power/fan speed rocker switch: High/Off/Low settings   |
| Indicators                | Power on: green LED; Power Supply Failure: red LED   |
| Ozone Level               | $< 0.05$ ppm; 24 hr. accumulation  |

\* Measurements taken at high fan speed.

#### Physical Specifications

|                |   |
|----------------|---|
| Chassis        | Aluminum with epoxy-polyester powder coat   |
| Mounting       | Four 1 1/8" S-hooks provided                |
| Dimensions     | 4"H x 6"W x 36"L (10.16 x 15.24 x 91.44 cm) |
| Weight         | 8 lbs. (3.6 kg)                             |
| Certifications | C-TUV-US, CE, CB, C-TICK                    |


#### Product No.

#### Description

Accessories  
**990F**

Foam Filters, two per carton

### Overhead Ionizer 990 Test Position

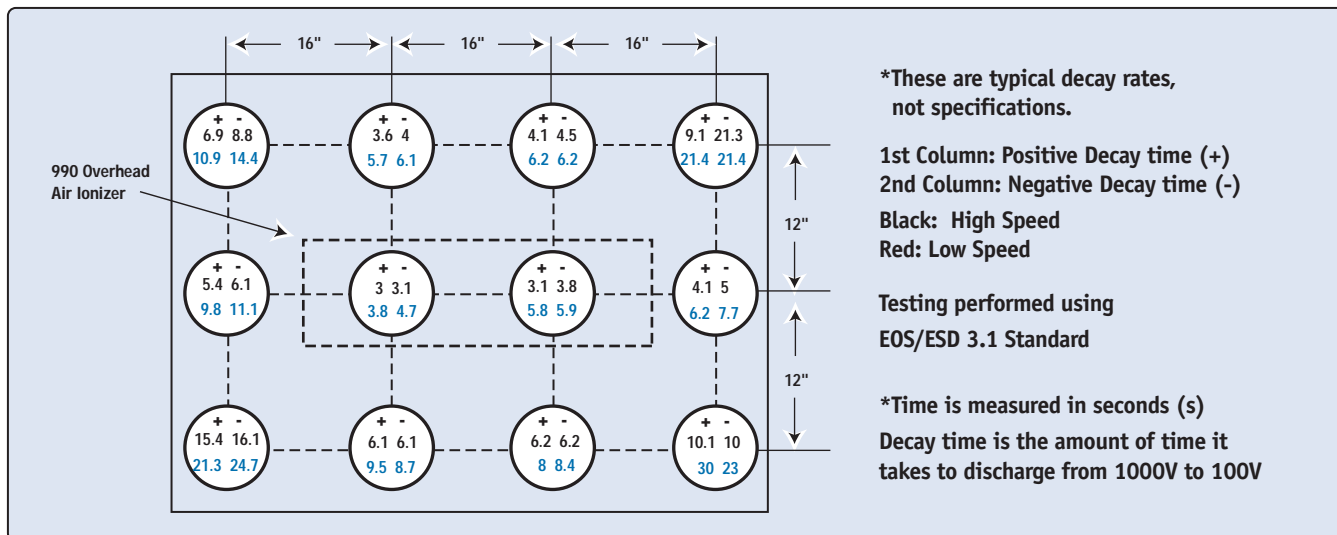



## Ionized Air Gun

The 3M™ Ionized Air Gun 980/980E is an excellent tool for blowing particulate contamination off of any surface. It releases a balanced stream of compressed ionized air that neutralizes the static charge that can hold particulates to a surface. The loose particles can then be easily blown away. Patented technology ensures balanced ionization for consistent control of surface charges. The air gun does not need adjustment and requires very little maintenance.



Ionized Air Gun 980



The 3M Air Gun 980 is a multi-component device that consists of a hand unit, an air hose and a mounting console. Compact and lightweight, the console for the unit can be mounted anywhere on the workstation for easy access. It connects to any supply of clean, dry air or nitrogen, and an internal disposable filter collects particles from the air supply. The low-voltage electrical feed from the console to the hand unit is incorporated into the 7 ft. (2,1 m) light, flexible air hose. The gun itself is very lightweight and ergonomically designed for long-term user comfort and efficient operation. The console, gun and air hose are all made of static-dissipative, ESD-safe materials.

The 3M Air Gun 980 operates from 100/120 AC power; the 3M™ Air Gun 980E is a 230V version for European use.

| Product No.   | Description   |
|---|---|
| 980   | Ionized Air Gun<br>AC 100/120V 50/60 Hz                                 |
|   | Hand unit<br>8.0 in. x 3.0 in. x 1.0 in.<br>(20,3 cm x 7,6 cm x 2,5 cm) |
|   | Construction<br>Dissipative rigid polycarbonate                         |
|   | Weight<br>12.0 oz (341 g) with 7 ft. air hose                           |
|   | Emitter points<br>Tungsten alloy  |
|   | Air Hose<br>Construction<br>Dissipative flexible polyurethane           |
|   | Size<br>7 ft. long, 0.38" OD  |
|   | Filter efficiency<br>99.9% for 0.1 micron particle size                 |
|   | Console<br>8.5 in. x 3.0 in. x 1.6 in.<br>(21,6 cm x 7,6 cm x 4,1 cm)   |
|   | 980E  |
| Hand unit<br>8.0 in. x 3.0 in. x 1.0 in.<br>(20,3 cm x 7,6 cm x 2,5 cm) |   |
| Console<br>8.5 in. x 3.0 in. x 1.6 in.<br>(21,6 cm x 7,6 cm x 4,1 cm)   |   |

| Product No. | Description                            |
|-------------|--|
| Accessories |  |
| 980F        | Replacement Air Filters (4 pack of 3 ) |
| 980T        | Replacement Nozzle Tip                 |
| 960X/980X   | Replacement Wall Transformer, 120V     |
| 980E-X      | Replacement Wall Transformer, 230V     |



# Static Control Workstation Solutions

## Benchtop Air Ionizers

The use of ionized air in electronics work environments will remove the build up of potentially damaging static charges. Air ionizers are primarily used to control static charge on nonconductive materials. The 3M™ Benchtop Air Ionizer 963 Series blanket the benchtop with ionized air to help prevent static from damaging sensitive electronics.

### Features

- Two versions available: the Benchtop Air Ionizer 963 operates using AC 120V power, and the Benchtop Air Ionizer 963E from DC 24V power supplied by an included universal power transformer (power line cord not included).
- Fast neutralization of static charges on nonconductive objects. < 1 second at 1 ft. (30 cm) distance using ANSI/ESD S3.1 test procedure.
- Maintains equal balance of positive-negative ions
- Two-speed fans
- Static-dissipative housing prevents static charge build-up on the surface of the housing, a common problem with ionizers. "ESD-safe" design allows the ionizer to be part of your overall static-safeguarded electronic workstation.
- UL, C-UL, NOM certification. CE-marked.

| Product No. | Description  |
|-------------|--|
| 963         | Benchtop Air Ionizer, including ionizer, Operator's Manual, and power cord; 120VAC               |
| 963E        | Benchtop Air Ionizer, including ionizer, Operator's Manual, and power transformer, 100VAC-240VAC |



Benchtop Air Ionizer 963



## Product Referral Generator

- Floor Mats/Runners 8200 Series ..... pg. 18
- Dissipative Rubber Mats/Runners 8800 Series ..... pg. 19
- Air Ionizer Test Kit 718A..... pg. 36

| Property                                | Typical Values                                      |   |
|---|---|---|
|   | 963   | 963E  |
| Power Ratings                           | AC 120V 60 Hz 0.20 A 20 W                           | DC 24V 0.5A 10W   |
| Power Inlet                             | IEC 320 Socket                                      | Mini DIN socket   |
| Power Transformer                       | -   | Input: AC 100V-240V, 0.4A, 50/60 Hz Into IEC320 Socket. Output: DC24V, 0.5A 3' (0.9M) cord with Mini DIN plug |
| Power Outlet Cord                       | 6' (1.8 m) cord with IEC 320 and NEMA 5-15 plugs    | Not included  |
| Dimensions (w/mounting base)            | 7.0" W x 9" H x 4" D<br>18 cm W x 23 cm H x 10 cm D | 7.0 in. W x 9 in. H x 4 in. D<br>18 cm W x 23 cm H x 10 cm D  |
| Weight                                  | 2.5 lb. (1.1 kg)                                    | 2.5 lb. (1.1 kg)  |
| Air Flow                                |   |   |
| Low Speed                               |   |   |
| Feet per Minute                         | 200 fpm (1.0 m/s)                                   | 100 fpm (0.5 m/s)   |
| Standard Cubic Feet per Minute          | 56.8 scfm   | 37.3 scfm   |
| High Speed                              |   |   |
| Feet per Minute                         | 370 fpm (1.8 m/s)                                   | 300 fpm (1.5 m/s)   |
| Standard Cubic Feet per Minute          | 105 scfm  | 112 scfm  |
| Operating Temperature                   | 59°F (15°C) to 104°F (40°C) 59°F                    | 59°F (15°C) to 104°F (40°C)   |
| Static discharge time * @ 1 ft. (30 cm) | < 1 second  | < 1 second  |
| Offset Voltage                          | ±15V  | ±15V  |
| Certifications and approvals            | UL, C-UL, NOM                                       | UL, C-UL, NOM, CE   |
| Warranty                                | 1-year  | 1-year  |

\* When tested according to ANSI/ESD S3.1-1991 at high fan speed.





## Mini Air Ionizer

The 3M™ Mini Air Ionizer 960 is a small and versatile blower available for equipment or local area ionization. Its small size makes it ideal for use in those situations where space is at a minimum. Possible applications include in or around electronic product equipment, inside OEM equipment, or on ESD workstations.

The Mini Air Ionizer 960 generates a well-balanced flow of ionized air particles, which neutralizes any stray electrostatic buildup on a surface. Charges are dissipated in seconds and the possibility of a damaging electrostatic discharge (ESD) event is minimized. The ionizer also maintains a reasonably balanced flow ( $\pm 20V$ ) of ionized air.

The unit runs off of low-voltage 24 VAC power, that can be supplied by the 3M™ Wall Transformer 960X (sold separately). Included with the ionizer are a mounting bracket and a 3ft. telephone cable (with modular plugs) to connect the ionizer to the Wall Transformer 960X.

### Features

- Steady-state DC ion emission for efficient ion delivery
- Intrinsically balanced - no adjustment necessary
- Small/compact design utilizes very little work bench space
- UL/C-UL/CE for global acceptance



Mini Air Ionizer 960



| Product No. | Description      |
|-------------|------------------|
| 960         | Mini Air Ionizer |
| 960X/980X   | Wall Transformer |

### Mini Air Ionizer 960

| Item                       | Typical Properties  |
|----------------------------|---|
| Input Voltage              | AC 24V  |
| Power                      | 5.5 watts   |
| Power Input Connection     | RJ-11 socket  |
| Size                       | 4.5 in. (H) x 3.3 in. (W) x 2 in. (D)<br>(including bracket)<br>11.5 cm x 8.4 cm x 5.1 cm |
| Weight                     | 0.75 lb.  |
| Air Flow Velocity          | (@1 ft. in front of grille):<br>300 ft./min.  |
| Air Flow Volume            | 22 scfm   |
| Certifications             | UL, C-UL, CE  |
| *Offset Balance @ 1 ft.    | $\pm 20 V$  |
| *On Center Discharge Times | @ 1 ft. <4 seconds<br>@ 2 ft. <10 seconds<br>@ 3 ft. <18 seconds<br>@ 4 ft. <28 seconds   |

\*Testing was performed with a charged plate monitor in accordance with ionization standard ANSI/ESD 3.1 - 1991.

### Wall Transformer 960X/980X (sold separately)

| Item           | Typical Properties  |
|----------------|---|
| Input          | AC 120V, 50/60 Hz, 270 mA   |
| Output         | AC 24V, 1.0 A through RJ-11 socket connector                        |
| Dimensions     | 3.2 in. (H) x 2.6 in. (W) x 1.9 in. (D)<br>8.1 cm x 6.6 cm x 4.8 cm |
| Weight         | 16 oz.  |
| Certifications | UL  |

Note: One transformer will supply four Mini Air Ionizers 960.



# Static Control Workstation Solutions

## Air Ionizer Tester/Field Meter and Charger

### Static Sensor

The 3M™ Static Sensor 718 is an easy-to-use, hand-held instrument designed to measure static voltages on objects and surfaces, arising from electrostatic charge buildups. This instrument can play a valuable role in an organization's ESD-control program by helping the user locate and quantify ESD trouble-spots.

#### Features

- Small-size, lightweight, conductive plastic housing
- Membrane switches for Power, Range/Zero, and Hold functions
- Digital, LCD (liquid-crystal) display is easy to read and updates quickly
- Ranging systems assist user in making quick and easy measurements
- Measurements accurate to 5%
- Output jack available for continuous measurements



Static Sensor 718

### Air Ionizer Test Kit

The 3M™ Air Ionizer Test Kit 718A, when used in conjunction with the Static Sensor 718, can be used for periodic verification of air ionizer performance. The unit consists of a charge plate and a charger.



Air Ionizer Test Kit 718A

| Product No. | Description   |
|-------------|---|
| 718         | Static Sensor, including meter, Operator's Manual, and Certificate of Performance verification. Available in certified.         |
| 718A        | Air Ionizer Test Kit, including charge plate assembly, charger, Operator's Manual, and Certificate of Performance verification. |

### Static Sensor 718 Physical Characteristics

| Item                 | Typical Properties   |
|----------------------|--|
| Dimensions           | 0.85" (H) x 2.4" (W) x 4.15" (L)<br>2.2 cm (H) x 6.1 cm (W) x 10.5 cm (L)  |
| Weight               | 4.5 oz. (128 g) with battery   |
| Power Requirements   | One 9-volt alkaline battery (not included)                                 |
| Measurement Ranges   | 0 - 2 kV Low Range<br>0 - 20 kV High Range                                 |
| Voltage Display      | 3 ½ digit liquid crystal display   |
| Distance indicator   | LED targets. Aligned targets indicate 1 in. (2.54 cm) measurement distance |
| Measurement accuracy | Within 5% of actual voltage  |
| Certifications       | UL, C-UL, CE, CB-scheme, NOM   |

### 3M Air Ionizer Test Kit 718A Physical Characteristics

| Item                         | Typical Properties   |
|------------------------------|--|
| Charge Plate Assembly        | Per ESD Association Standard Practice - 3.3                              |
| Charge Plate assembly Weight | 2.5 oz (70 g)  |
| Charger Dimensions           | 0.85" (H) x 2.4" (W) x 5.0" (L)<br>2.2 cm (H) x 6.1 cm (W) x 12.7 cm (L) |
| Charger Weight               | 6 oz. (170 g) with battery   |
| Charger Power Requirements   | One 9 volt alkaline battery  |
| Charger Output               | 1100V minimum for positive or negative voltage                           |
| Certifications               | UL, C-UL, CE, CB-scheme, NOM   |








# Static Control Packaging and Transportation Products

2

*3M provides a wide range of static shielding and barrier packaging products to protect sensitive electronic components from static charges during transit and while in storage. To meet your specific needs, 3M provides shielding bags, cushioned bags and wrap, moisture barrier bags and more in a variety of sizes and material composition.*

*3M™ conductive resin products are easily grounded to prevent holding a static charge. Available as film, tubing, bags and drum liners, this material is made of opaque, volume-conductive, carbon-impregnated polyolefin. The electrical characteristics are not affected by humidity, and are suited for material handling, shipping and storage.*





# Static Control Packaging and Transportation Products

## Static Shielding Bags


The 3M™ Metal-In Static Shielding Bag 1900/1910 is an economical alternative shielding bag for less demanding applications where testing and reusing bags are not prime considerations.

Aluminum is vapor-coated on half-mil polyester. This shielding layer is bonded between the polyester layer and a static-dissipative polyethylene inner layer. Static Shielding Bags 1900/1910 are amine-free, non-corrosive and meet EIA-541 definition for static shielding/dissipative packaging.

The Static Shielding Bag 1910 features a zipper closure for easy opening and closing.



Static Shielding Bag 1900/1910



Cross-section

### Static Shielding Bag 1900/1910 Properties

| Property                                 | Test Method                        | Typical Value  |
|--|------------------------------------|--|
| Thickness                                | ASTM D2103                         | 2.9 mil (74 microns)   |
| Strength<br>Tensile                      | ASTM D882                          | 15 lbs./in. width<br>> 5200 PSI MD/TD  |
| Puncture                                 | FTMS 101,<br>Method 2065           | >12 lbs. (5,4 kg)  |
| Seam                                     | MIL PRF 81705                      | Pass   |
| Optical Density                          | ASTM D1003                         | .35-.45  |
| Surface Resistance/Resistivity           |                                    |  |
| Interior                                 | ESD S-11.11                        | <10 <sup>11</sup> ohms   |
| Exterior                                 | ESD S-11.11                        | <10 <sup>11</sup> ohms   |
| Metallized Layer                         | Monroe #267                        | <10 <sup>2</sup> ohm/sq.   |
| Electrostatic<br>Shielding               | EIA-541 (V-Zap)<br>ANSI/ESD S11.31 | <30V<br><25nJ  |
| Electrostatic Decay<br>Interior          | EIA-541                            | <2 sec.  |
| Contact Corrosivity                      | FTMS 101C,<br>Method 3005          | Pass   |
| Outgassing<br>TML<br>CVCM                | ASTM E595<br>ASTM E595             | <1.0%<br><0.1%   |
| Heat Seal Properties<br>Temperature      |                                    | 180°F – 250°F<br>(82°C – 121°C)  |
| Time<br>Pressure                         |                                    | 0.5 – 5.0 Sec.<br>20 – 60 PSI<br>(1.4 x 10 <sup>5</sup> – 4.1 x 10 <sup>5</sup> N/m <sup>2</sup> ) |
| Shelf Life<br>(from date of manufacture) |                                    | 1 – Year   |

| Product No.                         | Description   |
|-------------------------------------|---|
| 1900                                | Metal-In Static Shielding Bag.<br>100 bags per pack |
|                                     | <b>Standard Sizes, in. (cm)</b>                     |
|                                     | 3 x 5 (7,6 x 12,5)                                  |
|                                     | 4 x 4 (10,2 x 10,2)                                 |
|                                     | 4 x 6 (10,2 x 15,2)                                 |
|                                     | 4 x 24 (10,2 x 61)                                  |
|                                     | 4 x 26 (10,2 x 66,0)                                |
|                                     | 4 x 30 (10,2 x 76,2)                                |
|                                     | 5 x 8 (12,7 x 20,3)                                 |
|                                     | 5 x 10 (12,7 x 25,4)                                |
|                                     | 6 x 8 (15,2 x 20,3)                                 |
|                                     | 6 x 10 (15,2 x 25,4)                                |
|                                     | 7 x 15 (17,8 x 38,1)                                |
|                                     | 8 x 8 (20,3 x 20,3)                                 |
|                                     | 8 x 10 (20,3 x 25,4)                                |
|                                     | 8 x 12 (20,3 x 30,5)                                |
|                                     | 10 x 12 (25,4 x 30,5)                               |
|                                     | 10 x 14 (25,4 x 35,6)                               |
|                                     | 10 x 24 (25,4 x 61)                                 |
|                                     | 10 x 26 (25,4 x 66,0)                               |
|                                     | 10 x 30 (25,4 x 76,2)                               |
|                                     | 11 x 15 (27,9 x 38,1)                               |
|                                     | 12 x 16 (30,5 x 40,6)                               |
|                                     | 12 x 18 (30,5 x 45,7)                               |
| 14 x 18 (35,6 x 45,7)               |   |
| 15 x 18 (38,1 x 45,7)               |   |
| 16 x 24 (40,6 x 61)                 |   |
| 18 x 18 (45,7 x 45,7)               |   |
| 18 x 24 (45,7 x 61)                 |   |
| <b>Custom Size Limits, in. (cm)</b> |   |
| 2 x 3 to 36 x 36                    | (5,1 x 7,6 to 91,4 x 91,4)                          |


| Product No. | Description                                    |                          |
|-------------|--|--------------------------|
| 1910        | 1900 with Zipper Closure.<br>100 bags per pack |                          |
|             | <b>Standard Sizes, in. (cm)</b>                |                          |
|             | 3 x 5 (7,6 x 12,5)                             |                          |
|             | 4 x 4 (10,2 x 10,2)                            |                          |
|             | 4 x 6 (10,2 x 15,2)                            |                          |
|             | 5 x 8 (12,7 x 20,3)                            |                          |
|             | 6 x 8 (15,2 x 20,3)                            |                          |
|             | 6 x 10 (15,2 x 25,4)                           |                          |
|             | 8 x 10 (20,3 x 25,4)                           |                          |
|             | 8 x 12 (20,3 x 30,5)                           |                          |
|             | 10 x 12 (25,4 x 30,5)                          |                          |
|             | 10 x 14 (25,4 x 35,6)                          |                          |
|             | 11 x 15 (27,9 x 38,1)                          |                          |
|             | 12 x 12 (30,5 x 30,5)                          |                          |
|             | 12 x 16 (30,5 x 40,6)                          |                          |
|             | 12 x 18 (30,5 x 45,7)                          |                          |
|             | 18 x 18 (45,7 x 45,7)                          |                          |
|             | <b>Custom Size Limits, in. (cm)</b>            |                          |
|             | 3 x 3 to 24 x 30                               | (7,6 x 7,6 to 61 x 76,2) |

Dimensions are inside measurements (W x L).  
Custom printing on bags also available by special order.  
(Please contact 3M Customer Service for quotations.)



## Product Referral Generator

Antistatic Utility Tape 40..... pg. 72




## Static Shielding Bags

The 3M™ Static Shielding Bags 1970 are designed to meet the demanding static shielding requirements in the electronic assembly and disk drive storage markets. The Static Shielding Bag 1980, a zipper version, is also available upon request in the same standard sizes.

### Static Shielding Bag 1970 Properties


| Property                                  | Test Method                | Typical Value  |
|---|----------------------------|--|
| Thickness                                 | Measure                    | 2.9 mil. (74 microns)  |
| Tensile Strength                          | ASTM D 882                 | >6200 PSI MD/TD<br>( $2.4 \times 10^7$ N/m <sup>2</sup> )  |
| Puncture Strength                         | FTMS 101C                  | >10 lbs. (>4,54 kg)<br>Method 2065   |
| Optical Density                           | ASTM D 1003                | 0.35-0.45  |
| Transparency                              | ASTM D 1003                | 40%  |
| Seam Strength                             | Mil PRF 81705D             | Pass (3.5 lb./1,6 kg<br>Hanging weight)  |
| Surface Resistance                        | ANSI/ESD S 11.11           | < $1 \times 10^{11}$ ohms @12% R.H.  |
| Static Discharge Shielding                | ANSI/ESD S 11.31           | < 25 nJ  |
| Outgassing                                | Dynamic Headspace          | <100µg/g total outgassing<br>Total < 1µg/g Hydrocarbons  |
| Ionic Contamination                       | Extraction/IC              | <30ng/cm <sup>2</sup> : Na, F, PO <sub>4</sub> , SO <sub>4</sub> ,<br>Cl, NH <sub>4</sub><br><150ng/cm <sup>2</sup> : NO <sub>3</sub><br>< 1µg/cm <sup>2</sup> |
| Non Volatile Residue                      | ASTM E 1235<br>(reference) |  |
| Polycarbonate                             | EIA 564                    | Pass - 185°F (85°C),<br>3400 PSI   |
| Compatibility<br>Amines, Amides, Silicone | FTIR/NMR                   | None Added   |
| Shelf life<br>(from date of manufacture)  |                            | 1 year   |

| Product No.           | Description                     |
|-----------------------|---------------------------------|
| 1970                  | Static Shielding Bag.           |
|                       | <b>Standard Sizes, in. (cm)</b> |
|                       | 3 x 5 (7,6 x 12,5)              |
|                       | 4 x 6 (10,2 x 15,2)             |
|                       | 5 x 8 (12,7 x 20,3)             |
|                       | 6 x 10 (15,2 x 25,4)            |
|                       | 7 x 10 (17,8 x 25,4)            |
|                       | 8 x 10 (20,3 x 25,4)            |
|                       | 8 x 12 (20,3 x 30,5)            |
|                       | 10 x 12 (25,4 x 30,5)           |
|                       | 10 x 14 (25,4 x 35,6)           |
|                       | 11 x 15 (27,9 x 38,1)           |
|                       | 12 x 16 (30,5 x 40,6)           |
| 15 x 18 (38,1 x 45,7) |                                 |



Cross-section

| Product No.           | Description                               |
|-----------------------|---|
| 1980                  | Static Shielding Bag with Zipper Closure. |
|                       | <b>Standard Sizes, in. (cm)</b>           |
|                       | 3 x 5 (7,6 x 12,5)                        |
|                       | 4 x 6 (10,2 x 15,2)                       |
|                       | 5 x 8 (12,7 x 20,3)                       |
|                       | 6 x 10 (15,2 x 25,4)                      |
|                       | 8 x 10 (20,3 x 25,4)                      |
| 10 x 12 (25,4 x 30,5) |   |



# Static Control Packaging and Transportation Products

## Static Shielding Bags

3M™ Metal-Out Static Shielding Bags 2100R are produced with a construction in which the shielding layer is very near the exterior surface. A thin abrasion-resistant coating protects this metal surface from scratches, but still permits rapid charge draining when the bag is placed on a conductive or dissipative work surface.

The bags use a polyester layer that is double the thickness found in economy bags. This polyester is the sturdy foundation to which the thin metallization layer is applied. This makes the bags more durable and provides electrical isolation that prevents electrical currents from passing through the bag.


The interior features an amine-free antistat agent that limits triboelectric charging of parts as they move around inside the bag. It does not contribute to corrosion of parts or crazing of polycarbonate materials, and it does not rely solely on the ambient humidity for effective performance.

It functions properly in conditions as low as 10% R.H.

3M™ Static Shielding Bag 2110R uses the same film as the 2100R, but features a zipper closure for easy opening and closing.



Static Shielding Bag 2100R



Cross-section


### Static Shielding Bag 2100R/2110R Properties

| Property                              | Test Method                        | Typical Value   |
|---------------------------------------|------------------------------------|---|
| Thickness                             | ASTM D2103                         | 3.2 mil (81 microns)  |
| Strength                              |                                    | >20 lbs. (>6250 PSI, 4.3 x 10 <sup>7</sup> N/m <sup>2</sup> ) |
| Tensile                               | ASTM D882                          | 9000 PSI (6.2 x 10 <sup>7</sup> N/m <sup>2</sup> )            |
| Puncture                              | FTMS 101                           | 24 lbs. (10,9 kg)   |
| Seam                                  | MIL PRF 81705                      | Pass  |
| Optical Density                       | ASTM D1003                         | .35-.45   |
| Surface Resistance/Resistivity        |                                    |   |
| Interior                              | ANSI/ESD S11.11                    | <10 <sup>11</sup> ohms  |
| Exterior                              | ANSI/ESD S11.11                    | <10 <sup>9</sup> ohms   |
| Metallized Layer                      | Monroe #267                        | <10 <sup>2</sup> ohm/sq.                                      |
| Electrostatic Shielding               | EIA-541 (V-Zap)<br>ANSI/ESD S11.31 | <30V<br><25nJ   |
| Decay Time                            | EIA-541                            | <2 sec.   |
| Contact Corrosivity                   | FTMS 101C Method 3005              | Pass  |
| Outgassing                            |                                    |   |
| TML                                   | ASTM E595                          | <1.0%   |
| CVCM                                  | ASTM E595                          | <0.1%   |
| Heat Seal Properties                  |                                    |   |
| Temperature                           |                                    | 180°F - 250°F (82°C - 121°C)                                  |
| Time                                  |                                    | 0.5 - 5.0 sec.  |
| Pressure                              |                                    | 20 - 60 PSI   |
| Shelf Life (from date of manufacture) |                                    | 1 - Year  |

| Product No. | Description  |               |
|-------------|--|---------------|
| 2100R       | Metal-Out Static Shielding Bag.<br>100 bags per pack |               |
|             | <b>Standard Sizes, in. (cm)</b>                      |               |
|             | 3 x 5  | (7,6 x 12,5)  |
|             | 4 x 4  | (10,2 x 10,2) |
|             | 4 x 6  | (10,2 x 15,2) |
|             | 4 x 26   | (10,2 x 66,0) |
|             | 4 x 30   | (10,2 x 76,2) |
|             | 5 x 8  | (12,7 x 20,3) |
|             | 6 x 8  | (15,2 x 20,3) |
|             | 6 x 10   | (15,2 x 25,4) |
|             | 7 x 15   | (17,8 x 38,1) |
|             | 8 x 8  | (20,3 x 20,3) |
|             | 8 x 10   | (20,3 x 25,4) |
|             | 8 x 12   | (20,3 x 30,5) |
|             | 10 x 12  | (25,4 x 30,5) |
|             | 10 x 14  | (25,4 x 35,6) |
|             | 10 x 24  | (25,4 x 61)   |
|             | 11 x 15  | (27,9 x 38,1) |
|             | 12 x 16  | (30,5 x 40,6) |
|             | 12 x 18  | (30,5 x 45,7) |
|             | 14 x 18  | (35,6 x 45,7) |
|             | 15 x 18  | (38,1 x 45,7) |
| 16 x 24     | (40,6 x 61)  |               |
| 18 x 18     | (45,7 x 45,7)  |               |
| 18 x 24     | (45,7 x 61)  |               |
|             | <b>Custom Size Limits, in. (cm)</b>                  |               |
|             | 2 x 3 to 36 x 36 (5,1 x 7,6 to 91,4 x 91,4)          |               |

| Product No. | Description                                     |   |
|-------------|---|---|
| 2110R       | 2100R with Zipper Closure.<br>100 bags per pack |   |
|             | <b>Standard Sizes, in. (cm)</b>                 |   |
|             | 3 x 5   | (7,6 x 12,5)                              |
|             | 4 x 4   | (10,2 x 10,2)                             |
|             | 4 x 6   | (10,2 x 15,2)                             |
|             | 5 x 8   | (12,7 x 20,3)                             |
|             | 6 x 8   | (15,2 x 20,3)                             |
|             | 6 x 10  | (15,2 x 25,4)                             |
|             | 8 x 10  | (20,3 x 25,4)                             |
|             | 8 x 12  | (20,3 x 30,5)                             |
|             | 10 x 12   | (25,4 x 30,5)                             |
|             | 10 x 14   | (25,4 x 35,6)                             |
|             | 11 x 15   | (27,9 x 38,1)                             |
|             |   | <b>Custom Size Limits, in. (cm)</b>       |
|             |   | 3 x 3 to 24 x 30 (7,6 x 7,6 to 61 x 76,2) |

Dimensions are inside measurements (W x L).  
Custom printing on bags available by special order.  
(Please contact 3M Customer Service for quotations.)



## Static Shielding Bags

3M™ Metal-Out Cushioned Static Shielding Bags 2120R protect devices from physical damage as well as provide proper static shielding. The open-cell cushioning structure provides physical shock protection even when punctured. This system offers a more convenient packaging method than two-part packaging systems.

The five-layer construction of the bag protects against direct discharge, triboelectric charge and static fields. The inside layer, next to the components, is a smooth static-dissipative polyethylene liner that minimizes snagging of pins or sharp edges during insertion or removal.

### Static Shielding Bag 2120R Properties


| Property                                 | Test Method            | Typical Value             |
|--|------------------------|---------------------------|
| Thickness                                | PPP-C-1842             | 125 mil (3,175 mm)        |
| Strength                                 |                        |                           |
| Tensile                                  | ASTM D882              | 34 lbs./in.               |
| Puncture                                 | FTMS 101               | 22 lbs. (10 kg)           |
| Seam                                     | MIL PRF 81705          | Pass                      |
| Surface Resistance/Resistivity           |                        |                           |
| Interior                                 | EIA-541, ASTM D257     | <10 <sup>12</sup> ohm/sq. |
| Exterior                                 | ANSI/ESD S11.11        | <10 <sup>11</sup> ohms    |
| Metallized Layer                         | Monroe #267            | <10 <sup>2</sup> ohm/sq.  |
| Shielding                                | EIA-541 (V-Zap)        | <30V                      |
| Electrostatic Decay                      |                        |                           |
| Interior                                 | EIA-541                | <2 sec.                   |
| Contact Corrosivity                      | FTMS 101C, Method 3005 | Pass                      |
| Shelf life<br>(from date of manufacture) |                        | 1 - Year                  |

| Product No.                         | Description   |
|-------------------------------------|---|
| 2120R                               | Cushioned Static Shielding Bags.<br>100 bags per pack |
|                                     | <b>Standard Sizes, in. (cm)</b>                       |
|                                     | 6 x 7 (15,2 x 17,8)                                   |
|                                     | 8 x 7 (20,3 x 17,8)                                   |
|                                     | 8 x 11 (20,3 x 27,9)                                  |
|                                     | 10 x 7 (25,4 x 17,8)                                  |
|                                     | 12 x 11 (25,4 x 27,9)                                 |
|                                     | 14 x 11 (35,6 x 27,9)                                 |
|                                     | 14 x 15 (35,6 x 38,1)                                 |
|                                     | 16 x 11 (40,6 x 27,9)                                 |
| 16 x 15 (40,6 x 38,1)               |   |
| 18 x 11 (45,7 x 27,9)               |   |
| 18 x 15 (45,7 x 38,1)               |   |
| 18 x 23 (45,7 x 58,4)               |   |
| <b>Custom Size Limits, in. (cm)</b> | 5 x 4 to 24 x 23 (12,7 x 10,2 to 61 x 58,4)           |

Dimensions are inside measurements (W x L).



Static Shielding Bag 2120R




Cross-section

## Cushioned Static Shielding Wrap

3M™ Cushioned Wrap 2126R provides static shielding and physical protection for large or irregularly shaped circuit boards. It is made of the same open-cell cushioning construction used for the bag and is heat-sealable, but does not have the smooth inner liner. Supplied in rolls, it can be cut to fit various wrapping applications.



Static Shielding Wrap 2126R



Cross-section

| Product No.          | Description   |
|----------------------|---|
| 2126R                | Cushioned Static Shielding Wrap.<br>Supplied in rolls |
|                      | <b>Standard Sizes, in. x ft. (cm x m)</b>             |
|                      | 24 x 250 (61 x 76 )                                   |
| 48 x 250 (122 x 76 ) |   |

### 2126R Properties

| Property                                 | Test Method            | Typical Value             |
|--|------------------------|---------------------------|
| Thickness                                | PPP-C 1842             | 125 mil                   |
| Strength                                 |                        |                           |
| Tensile                                  | ASTM D882              | 34 lbs./in.               |
| Puncture                                 | FTMS 101               | 22 lbs. (10 kg)           |
| Surface Resistance/Resistivity           |                        |                           |
| Interior                                 | ANSI/ESD S11.11        | <10 <sup>12</sup> ohm/sq. |
| Exterior                                 | ANSI/ESD S11.11        | <10 <sup>11</sup> ohms    |
| Metallized Layer                         | Monroe #267            | <10 <sup>2</sup> ohm/sq.  |
| Shielding                                | EIA-541 (V-Zap)        | <30V                      |
| Electrostatic Decay                      |                        |                           |
| Interior                                 | ANSI/ESD S11.11        | <2 sec.                   |
| Contact Corrosivity                      | FTMS 101C, Method 3005 | Pass                      |
| Shelf life<br>(from date of manufacture) |                        | 1 - Year                  |



# Static Control Packaging and Transportation Products


## Moisture Vapor Barrier Bag

The 3M™ Moisture Barrier Bag 3370 has been designed to meet the demanding moisture protection needs of the electronics market.

- **Durability** – Utilizes a multi-layer 3.6 mil film design that provides puncture and tear resistance. Proven reliability in vacuum packaging applications.
- **Moisture Protection** – Provides proven long-term protection in the most critical seepage area – the seams. 3M provides a 1/2" side seam to increase reliability that the finished bag is capable of maintaining the MVTR level equivalent to that of the film. The bag's multi-layer design eliminates problems associated with "pinholes" found in many foil bags.
- **ESD/EMI shielding** – Provides high frequency protection and static shielding to protect the most sensitive parts.
- **Cleanliness** – Uses a clean barrier film which exceeds the requirements of EIA-583 Class I and contains no amines, amides or N-Octanoic Acid. Outgassing levels are extremely low.
- **Construction** – Opaque bag is a highly durable construction (from the outside layer to the innermost layer): static dissipative layer, two aluminized polyester layers each 48 gauge, 2.6 mil static dissipative polyethylene.
- **Industry Standards** – Meets the electrical and physical requirements of JESD 625A, MIL-PRF-81705, Type 1, EN100015, IEC61340-5-1.

The bag is available in many standard sizes and can be custom-sized for your specific application.


| Product No. | Description   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
|-------------|---|-----------|------|-------|---------------|-------|---------------|--------|---------------|--------|---------------|---------|---------------|---------|---------------|---------|---------------|---------|
| 3370        | Moisture Vapor Barrier Bag.<br>100 bags per pack.   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
|             | <table border="1"> <thead> <tr> <th>Size, in.</th> <th>(cm)</th> </tr> </thead> <tbody> <tr> <td>4 x 6</td> <td>(10,2 x 15,2)</td> </tr> <tr> <td>5 x 8</td> <td>(12,5 x 20,3)</td> </tr> <tr> <td>6 x 10</td> <td>(15,2 x 25,4)</td> </tr> <tr> <td>8 x 10</td> <td>(20,3 x 25,4)</td> </tr> <tr> <td>10 x 12</td> <td>(24,4 x 30,5)</td> </tr> <tr> <td>12 x 16</td> <td>(30,5 x 40,6)</td> </tr> <tr> <td>16 x 18</td> <td>(40,6 x 45,7)</td> </tr> <tr> <td>18 x 24</td> <td>(45,7 x 61)</td> </tr> </tbody> </table> | Size, in. | (cm) | 4 x 6 | (10,2 x 15,2) | 5 x 8 | (12,5 x 20,3) | 6 x 10 | (15,2 x 25,4) | 8 x 10 | (20,3 x 25,4) | 10 x 12 | (24,4 x 30,5) | 12 x 16 | (30,5 x 40,6) | 16 x 18 | (40,6 x 45,7) | 18 x 24 |
| Size, in.   | (cm)  |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 4 x 6       | (10,2 x 15,2)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 5 x 8       | (12,5 x 20,3)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 6 x 10      | (15,2 x 25,4)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 8 x 10      | (20,3 x 25,4)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 10 x 12     | (24,4 x 30,5)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 12 x 16     | (30,5 x 40,6)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 16 x 18     | (40,6 x 45,7)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |
| 18 x 24     | (45,7 x 61)   |           |      |       |               |       |               |        |               |        |               |         |               |         |               |         |               |         |

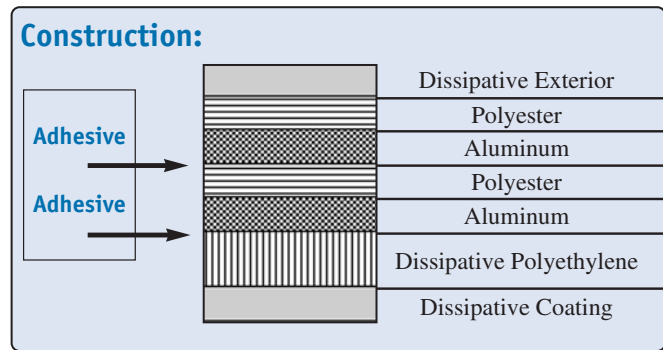

## Static Shielding Bag 3370

| Property                                      | Test Method                        | Typical Value   |
|---|------------------------------------|---|
| Thickness                                     | Measure                            | 3.6 mil. (92 microns)±10%   |
| Moisture Vapor Transmission Rate              | ASTM F 1249                        | < 0.015 grams/100 inches <sup>2</sup> /24 hours<br>(645.2 cm <sup>2</sup> ) (film and seams)  |
| Tensile Strength                              | ASTM D 882                         | > 8200 PSI (5.7 x 10 <sup>7</sup> N/m <sup>2</sup> )  |
| Puncture Resistance                           | FTMS 101C Method 2065              | > 20 lbs. (9.07 kg)   |
| Seam Strength                                 | Mil PRF 81705(D)                   | Pass (3.5 lb./1,6 kg hanging weight)  |
| Surface Resistance<br>(Interior and Exterior) | ANSI/ESD S 11.11                   | <1 x 10 <sup>11</sup> ohms @12% R.H.  |
| Metal Layer                                   | Monroe 267 Buried Layer            | < 100 ohms  |
| Static Discharge Shielding                    | ANSI/ESD S 11.31                   | < 7 nJ  |
| Outgassing                                    | Dynamic Headspace<br>Extraction/IC | <100µg/g Total outgassing, < 1µg/g Hydrocarbons   |
| Ionic Contamination                           |                                    | <20ng/cm <sup>2</sup> : Na, F, PO <sub>4</sub> , SO <sub>4</sub> , Cl, NH <sub>4</sub><br><100 ng/cm <sup>2</sup> : NO <sub>3</sub> |
| Non Volatile Residue                          | ASTM E 1235 (reference)            | <1 µg/cm <sup>2</sup>   |
| Polycarbonate Compatibility                   | EIA 564                            | Pass - 185°F (85°C), 3400 PSI   |
| Amines, Amides, Silicone                      | FTIR/NMR                           | None Added  |






## Conductive Film and Tubing

The 3M™ family of conductive film and tubing products is made of opaque, volume-conductive, carbon-impregnated polyolefin. Easily grounded, the electrical characteristics are not affected by age or humidity, and are suited for material handling, shipping and storage.

### Electrically Conductive Film

Made of opaque, volume-conductive, carbon-impregnated polyolefin film, in both short and long rolls. Versatile product – adaptable to numerous applications commonly found in the electronic or chemical industries.

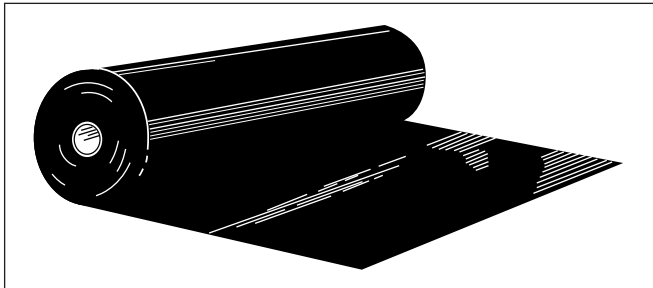

Film 1700, 1760 Series

### Conductive Tubing

3M™ Conductive Tubing 1724 is made of opaque, volume-conductive carbon-impregnated polyolefin in 500 ft. (152 m) rolls, and is used to make bags or protective sleeves for specialized packaging or storage requirements. The tubing is heat-sealable and is readily adaptable to automated packaging lines.



Tubing 1724

*Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.*

| Product No.                       | Description  |                 |                                  |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|-----------------------------------|--|-----------------|----------------------------------|----------------------------------|--|----|-------|-------|--------|----|-------|-----|--------|----|-------|-----|--------|
| <b>Short Rolls</b><br><b>1704</b> | Film. Thickness: 4.0 mil. (102 microns)  |                 |                                  |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | <table border="1"> <thead> <tr> <th colspan="2">Widths, in. (m)</th> <th colspan="2">Approximate Length/Roll, ft. (m)</th> </tr> </thead> <tbody> <tr> <td>36</td> <td>(0,9)</td> <td>150</td> <td>(45,7)</td> </tr> <tr> <td>54</td> <td>(1,4)</td> <td>150</td> <td>(45,7)</td> </tr> <tr> <td>72</td> <td>(1,8)</td> <td>150</td> <td>(45,7)</td> </tr> </tbody> </table> | Widths, in. (m) |                                  | Approximate Length/Roll, ft. (m) |  | 36 | (0,9) | 150   | (45,7) | 54 | (1,4) | 150 | (45,7) | 72 | (1,8) | 150 | (45,7) |
|                                   | Widths, in. (m)  |                 | Approximate Length/Roll, ft. (m) |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | 36   | (0,9)           | 150                              | (45,7)                           |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 54                                | (1,4)  | 150             | (45,7)                           |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 72                                | (1,8)  | 150             | (45,7)                           |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| <b>1706</b>                       | Film. Thickness: 6.0 mil. (152,4 microns)  |                 |                                  |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | <table border="1"> <thead> <tr> <th colspan="2">Widths, in. (m)</th> <th colspan="2">Approximate Length/Roll, ft. (m)</th> </tr> </thead> <tbody> <tr> <td>36</td> <td>(0,9)</td> <td>150</td> <td>(45,7)</td> </tr> <tr> <td>45</td> <td>(1,1)</td> <td>150</td> <td>(45,7)</td> </tr> <tr> <td>72</td> <td>(1,8)</td> <td>150</td> <td>(45,7)</td> </tr> </tbody> </table> | Widths, in. (m) |                                  | Approximate Length/Roll, ft. (m) |  | 36 | (0,9) | 150   | (45,7) | 45 | (1,1) | 150 | (45,7) | 72 | (1,8) | 150 | (45,7) |
|                                   | Widths, in. (m)  |                 | Approximate Length/Roll, ft. (m) |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | 36   | (0,9)           | 150                              | (45,7)                           |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 45                                | (1,1)  | 150             | (45,7)                           |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 72                                | (1,8)  | 150             | (45,7)                           |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| <b>1708</b>                       | Film. Thickness: 8.0 mil. (203,2 microns)  |                 |                                  |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | <table border="1"> <thead> <tr> <th colspan="2">Widths, in. (m)</th> <th colspan="2">Approximate Length/Roll, ft. (m)</th> </tr> </thead> <tbody> <tr> <td>36</td> <td>(0,9)</td> <td>150</td> <td>(45,7)</td> </tr> <tr> <td>54</td> <td>(1,4)</td> <td>150</td> <td>(45,7)</td> </tr> <tr> <td>72</td> <td>(1,8)</td> <td>150</td> <td>(45,7)</td> </tr> </tbody> </table> | Widths, in. (m) |                                  | Approximate Length/Roll, ft. (m) |  | 36 | (0,9) | 150   | (45,7) | 54 | (1,4) | 150 | (45,7) | 72 | (1,8) | 150 | (45,7) |
|                                   | Widths, in. (m)  |                 | Approximate Length/Roll, ft. (m) |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | 36   | (0,9)           | 150                              | (45,7)                           |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 54                                | (1,4)  | 150             | (45,7)                           |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 72                                | (1,8)  | 150             | (45,7)                           |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| <b>Long Rolls</b><br><b>1764</b>  | Film. Thickness: 4.0 mil. (102 microns)  |                 |                                  |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
|                                   | <table border="1"> <thead> <tr> <th colspan="2">Widths, in. (m)</th> <th colspan="2">Approximate Length/Roll, ft. (m)</th> </tr> </thead> <tbody> <tr> <td>36</td> <td>(0,9)</td> <td>1,500</td> <td>(457)</td> </tr> </tbody> </table>  | Widths, in. (m) |                                  | Approximate Length/Roll, ft. (m) |  | 36 | (0,9) | 1,500 | (457)  |    |       |     |        |    |       |     |        |
|                                   | Widths, in. (m)  |                 | Approximate Length/Roll, ft. (m) |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |
| 36                                | (0,9)  | 1,500           | (457)                            |                                  |  |    |       |       |        |    |       |     |        |    |       |     |        |

| Product No. | Description   |                  |                                  |                                  |  |   |        |     |       |    |        |     |       |
|-------------|---|------------------|----------------------------------|----------------------------------|--|---|--------|-----|-------|----|--------|-----|-------|
| <b>1724</b> | Lay Flat Conductive Tubing.<br>Thickness: 4.0 mil. (102 microns)  |                  |                                  |                                  |  |   |        |     |       |    |        |     |       |
|             | <table border="1"> <thead> <tr> <th colspan="2">Widths, in. (cm)</th> <th colspan="2">Approximate Length/Roll, ft. (m)</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>(12,7)</td> <td>500</td> <td>(152)</td> </tr> <tr> <td>12</td> <td>(30,5)</td> <td>500</td> <td>(152)</td> </tr> </tbody> </table> | Widths, in. (cm) |                                  | Approximate Length/Roll, ft. (m) |  | 5 | (12,7) | 500 | (152) | 12 | (30,5) | 500 | (152) |
|             | Widths, in. (cm)  |                  | Approximate Length/Roll, ft. (m) |                                  |  |   |        |     |       |    |        |     |       |
| 5           | (12,7)  | 500              | (152)                            |                                  |  |   |        |     |       |    |        |     |       |
| 12          | (30,5)  | 500              | (152)                            |                                  |  |   |        |     |       |    |        |     |       |

Other widths and lengths available upon quotation.

## Conductive Bags and Drum Liners

### Conductive Bags


3M™ Conductive Bags 2004 are made of opaque, volume – conductive carbon-impregnated polyolefin. They are easily grounded, and the electrical characteristics are not affected by age or humidity. The standard bags are readily heat-sealable and 4 mil thick.



Shielding Bags 2004

### Drum Liners

3M™ Drum Liners 2014 are simply larger sizes of the Conductive Bags 2004; bags wider than 18 inches (45,7 cm) are called drum liners. They do not hold static charge when grounded. They are commonly used for holding explosive chemicals that could be ignited by a static-caused spark, or dry chemicals that tend to cling to ordinary nonconductive static-laden plastics. A common application in the electronic or chemical industries is as a waste container liner.



Drum Liner 2014

### Film, Bag and Tubing Properties\*

| Property                        | Test Method | Typical Value  |
|---------------------------------|-------------|--|
| Thickness                       | ASTM D2103  | 4 mil (102 microns)  |
| Strength                        |             |  |
| Breaking Factor                 | ASTM D882   | 10 lbs./in.  |
| Puncture                        | Fed Std 101 | 8 lbs.   |
| Heat Seal Parameters            |             |  |
| Temperature                     |             | 180°F – 250°F  |
| Time                            |             | 0.5 – 5.0 sec.   |
| Pressure                        |             | 20 – 60 PSI<br>(1.4 x 10 <sup>5</sup> – 4.1 x 10 <sup>5</sup> N/m <sup>2</sup> ) |
| Temperature Limits              |             | -50°F – 150°F<br>(-46°C – 66°C)  |
| Vicat Softening Temperature     | ASTM D1525  | 83°C   |
| Electrical Properties           |             |  |
| Volume Resistivity              | ASTM D991   | <500 ohm-cm  |
| Static Decay                    | EIA-541     | <2 sec.  |
| Water Vapor Transmission        | ASTM F372   | 3 g/sq. m/day  |
| Chemical Susceptibility         | ASTM D543   |  |
| Dilute Acids and Alkalies       |             | Resistant  |
| Concentrated Acids & Alkalies   |             | Slight attack  |
| Alcohols (Isopropanol)          |             | Resistant  |
| Hydrocarbons (Heptane)          |             | Moderate attack  |
| Ketones (Acetone)               |             | Slight attack  |
| Oil and Gasoline                |             | Moderate attack  |
| Aromatic Hydrocarbons (Toluene) |             | Severe attack  |
| Shelf Life                      |             | Indefinite   |

\* Typical values for 4.0 mil film.  
Physical characteristics will change with other thicknesses.

| Product No.      | Description   |
|------------------|---|
| 2004             | Conductive Bags.<br>Wall thickness: 4.0 mil. (102 microns)<br>100 bags per pack |
|                  | <b>Standard Sizes, in. (cm)</b>   |
| 5 x 8            | (12,7 x 20,3)   |
| 8 x 12           | (20,3 x 30,5)   |
| 10 x 12          | (25,4 x 30,5)   |
| 12 x 16          | (30,5 x 40,6)   |
| 15 x 18          | (38,1 x 45,7)   |
|                  | <b>Custom Size Limits, in. (cm)</b>   |
| 4 x 4 to 42 x 72 | (10,2 x 10,2 to 106,7 x 182,9)  |

| Product No. | Description   |
|-------------|---|
| 2014        | Drum Liners.<br>Wall thickness: 4.0 mil. (102 microns)<br>100 per box |
|             | <b>Typical Drum Size, in. (cm)</b>                                    |
| 5 gallon:   | 18 x 24 (45 x 60)   |
| 20 gallon:  | 24 x 36 (61 x 91)   |
| 30 gallon:  | 30 x 36 (76 x 91)   |
| *55 gallon: | 38 x 58 (96 x 147)  |
|             | * available 50 per box  |

Dimensions are inside measurements (W x L).  
Other film thicknesses and bag sizes are available by special order.

*Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.*



## Single Card Carriers

3M™ Static-Shielding Single Card Carriers protect individual printed circuit boards from static and physical damage during storage and transport. Interiors are lined with dissipative cushioning foam.




Single Card Carrier

| Product No. | Length, in. (cm) | Width, in. (cm) | Depth, in. (cm) |
|-------------|------------------|-----------------|-----------------|
| 8520        | 10 (25,4)        | 8 (20,3)        | 1.25 (3,2)      |
| 8521        | 12 (30,5)        | 9 (22,9)        | 1.25 (3,2)      |
| 8522        | 18 (45,7)        | 17 (43,2)       | 2 (5,1)         |
| 8523        | 10 (25,4)        | 8 (20,3)        | 2 (5,1)         |

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

## Single Device Carrier


The rugged injection-molded 3M™ Single Device Carrier 5701 provides cost-effective physical and static protection for DIPs. The conductive units are volume resistive and will not lose their conductivity with age, nor do they depend on humidity to function. Single Device Carrier 5701 meets EIA-541 requirements for static shielding. A unique “saddle” design supports device leads and helps prevent accidental bending. Other design features include a smooth front surface on the container to adhere labels and a living hinge cover that snaps securely shut. Carrier accepts up to 18-pin 300 mil and 400 mil devices, and up to 28-pin 600 mil devices.

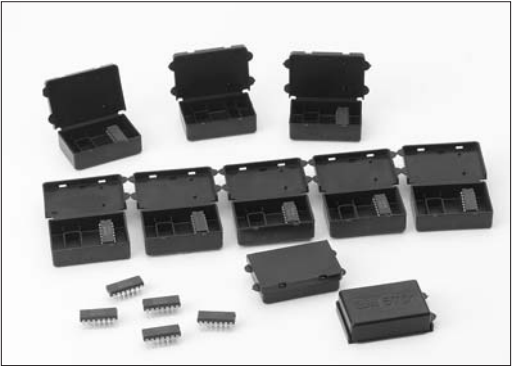


Single Device Carrier 5701

| Product No. | Length, in. (cm) | Width, in. (cm) | Depth, in. (cm) |
|-------------|------------------|-----------------|-----------------|
| 5701        | 1.55 (3,9)       | 1.01 (2,6)      | 0.46 (1,2)      |

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

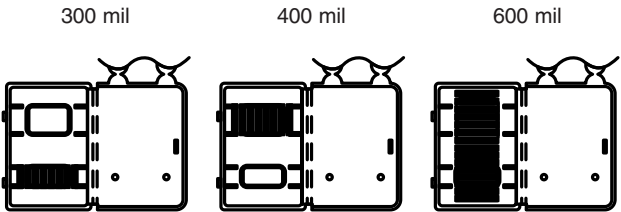



## Connector Covers

3M™ Connector Covers 4270 Series feature a unique conductive composite material. The material is made intrinsically conductive by uniformly distributing a conductive matrix of fibers during compounding. The covers are permanently volume conductive and free of carbon black particulate. The covers do not leave black marks and are more suited to clean situations.



Connector Covers 4270 Series

| Product No. | Description   |
|-------------|---|
| 4270        | Feature a unique conductive composite material. Noncorrosive and produce no visible corrosion. Connector Covers 4270 Series were designed to meet the requirements and intentions of MS90376 and MIL PRF 5501/31A or 32A. |

## Military Application


Circular Connectors Covers 4270 Series were designed to meet the requirements and intentions of MS90376, and MIL PRF 5501/31A or 32A. Prominent military contractors have qualified these materials to their own specifications and are encouraging their use.

### Material Properties



| Property                             | Test Method              | Typical Value                                      |
|--------------------------------------|--------------------------|--|
| Resistivity                          | ASTM D991                | <10 <sup>9</sup> ohm-cm                            |
| Contact Corrosivity<br>(Kovar plate) | FTMS 101C<br>Method 3005 | Pass   |
| Crayoning                            | 3M                       | Not visible  |
| Elongation                           | ASTM D638                | 25%  |
| Tensile                              | ASTM D638                | 1500 PSI (1.0 X 10 <sup>7</sup> N/m <sup>2</sup> ) |
| Vicat Softening                      | ASTM MD 1525             | 205°F (96°C)                                       |
| Out Gassing                          | ASTM E595                | Pass   |

### Material Properties

| Chemical                           | Reactions     |
|------------------------------------|---------------|
| Dilute Acids                       | Slight Attack |
| Dilute Alkalines                   | Slight Attack |
| Concentrated Acids                 | Severe Attack |
| Concentrated Alkalines             | Severe Attack |
| Methanol, Ethanol, and Isopropanol | Resistant     |
| Hydrocarbons                       | Slight Attack |
| Ketones                            | Dissolves     |
| Oil and Gasoline                   | Severe Attack |



## 3M™ Circular Cover 4270



| Product Description                  | Old Prod. Desc. | "A"   | "B"  | "C"   | "D"   |
|--------------------------------------|-----------------|-------|------|-------|-------|
| <b>Packaged 100/bag; 10 bags/box</b> |                 |       |      |       |       |
| 4270 M5501-31A-250                   | 4270-4R         | .670  | .500 | .250  | .336  |
| 4270 M5501/31A-313                   | 4270-5R         | .670  | .500 | .313  | .399  |
| 4270 M5501/31A-375                   | 4270-6R         | .670  | .500 | .375  | .461  |
| 4270 M5501/31A-413                   | 4270-8Y         | .670  | .625 | .413  | .483  |
| 4270 M5501/31A-480                   | 4270-8R         | .740  | .500 | .480  | .540  |
| 4270 M5501/31A-500                   | 4270-9R         | .750  | .500 | .500  | .586  |
| 4270 M5501/31A-530                   | 4270-10Y        | .750  | .625 | .530  | .595  |
| 4270 M5501/31A-605                   | 4270-10R        | .840  | .500 | .605  | .665  |
| 4270 M5501/31A-655                   | 4270-12Y        | .860  | .625 | .655  | .715  |
| 4270 M5501/31A-720                   | 4270-12R        | .970  | .500 | .720  | .755  |
| 4270 M5501/31A-785                   | 4270-14Y        | 1.031 | .625 | .785  | .845  |
| 4270 M5501/31A-850                   | 4270-14R        | 1.125 | .500 | .850  | .905  |
| 4270 M5501/31A-893                   | 4270-16Y        | 1.125 | .625 | .893  | .963  |
| 4270 M5501/31A-973                   | 4270-16R        | 1.220 | .500 | .973  | 1.035 |
| 4270 M5501/31A-1028                  | 4270-18Y        | 1.250 | .625 | 1.028 | 1.088 |
| 4270 M5501/31A-1093                  | 4270-18R        | 1.330 | .562 | 1.093 | 1.155 |
| 4270 M5501/31A-1125                  | 4270-19R        | 1.400 | .562 | 1.125 | 1.213 |

| Product Description                 | Old Prod. Desc. | "A"   | "B"  | "C"   | "D"   |
|-------------------------------------|-----------------|-------|------|-------|-------|
| <b>Packaged 50/bag; 10 bags/box</b> |                 |       |      |       |       |
| 4270 M5501/31A-1150                 | 4270-20Y        | 1.406 | .625 | 1.150 | 1.215 |
| 4270 M5501/31A-1231                 | 4270-20R        | 1.465 | .562 | 1.231 | 1.301 |
| 4270 M5501/31A-1270                 | 4270-22Y        | 1.500 | .625 | 1.270 | 1.340 |
| 4270 M5501/31A-1340                 | 4270-22R        | 1.590 | .562 | 1.340 | 1.410 |
| 4270 M5501/31A-1390                 | 4270-24Y        | 1.640 | .625 | 1.390 | 1.460 |
| 4270 M5501/31A-1463                 | 4270-24R        | 1.700 | .562 | 1.463 | 1.533 |
| 4270 M5501/31A-1540                 | 4270-25Y        | 1.810 | .625 | 1.540 | 1.580 |
| 4270 M5501/31A-1645                 | 4270-28Y        | 1.875 | .625 | 1.645 | 1.718 |
| 4270 M5501/31A-1715                 | 4270-28R        | 1.950 | .562 | 1.715 | 1.790 |
| <b>Packaged 25/bag; 10 bags/box</b> |                 |       |      |       |       |
| 4270 M5501/31A-1890                 | 4270-32Y        | 2.125 | .625 | 1.890 | 1.970 |
| 4270 M5501/31A-1965                 | 4270-32R        | 2.220 | .562 | 1.965 | 2.040 |
| 4270 M5501/31A-2140                 | 4270-36Y        | 2.340 | .625 | 2.140 | 2.210 |
| 4270 M5501/31A-2215                 | 4270-36R        | 2.435 | .600 | 2.215 | 2.290 |
| 4270 M5501/31A-2380                 | 4270-40Y        | 2.600 | .625 | 2.380 | 2.450 |
| 4270 M5501/31A-2440                 | 4270-40R        | 2.660 | .600 | 2.440 | 2.530 |
| 4270 M5501/31A-2630                 | 4270-44Y        | 2.875 | .625 | 2.630 | 2.700 |
| 4270 M5501/31A-2720                 | 4270-44R        | 2.960 | .600 | 2.720 | 2.812 |
| 4270 M5501/31A-2880                 | 4270-48Y        | 3.125 | .625 | 2.880 | 2.950 |
| 4270 M5501/31A-2960                 | 4270-48R        | 3.225 | .600 | 2.960 | 3.050 |

## Labels

3M™ Labels 7000 Series are designed to alert personnel handling bags, boxes or other carriers that the contents are static-sensitive. When made part of a comprehensive static control process, the labels help prevent improper handling of static-sensitive components. Available in single use or reusable forms using the accepted industry static symbols: JEDEC-14 (Joint Electronic Device Engineering Council) and Military Standard 129.




7101/Reusable



7102/Destructible



| Product No.             | Description   | Labels per Roll |
|-------------------------|---|-----------------|
| 7101                    | Reusable Orange w/Black Type JEDEC-14 Symbol        | 500             |
| 7102                    | Destructible Yellow w/Black Type JEDEC-14 Symbol    | 500             |
| <b>Size, in. (cm)</b>   |   |                 |
| 1.875 x 2.5 (4,6 x 6,4) |   |                 |
| 7201                    | Reusable Yellow w/Black Type MIL-STD-129 Symbol     | 500             |
| 7202                    | Destructible Yellow w/Black Type MIL-STD-129 Symbol | 500             |
| <b>Size, in. (cm)</b>   |   |                 |
| 2 x 2 (5,1 x 5,1)       |   |                 |
| 7203                    | Reusable Yellow w/Black Type MIL-STD-129 Symbol     | 250             |
| 7204                    | Destructible Yellow w/Black Type MIL-STD-129 Symbol | 250             |
| <b>Size, in. (cm)</b>   |   |                 |
| 4 x 4 (10,2 x 10,2)     |   |                 |



# Static Control Packaging and Transportation Products

## Hinged Containers

3M™ Hinged Containers are made from injected-molded plastic, and are noncorrosive and lightweight. The containers feature molded pin hinges that provide better security and reliability than traditional snap hinges.

Static-sensitive devices can be transported in these containers which provide protection from direct static discharges as well as from static fields from charged personnel and materials.



Hinged Containers

3M™ Containers are injection-molded in a variety of shapes and sizes. They are ideal for static-safe storage, kitting, and in-process handling and transporting of static-sensitive assemblies and devices.



Round Containers

| Product No. | Length, in. (cm) | Width, in. (cm) | Depth, in. (cm) |
|-------------|------------------|-----------------|-----------------|
| 4021        | 2.88 (7,3)       | 1.19 (3,0)      | 0.5 (1,3)       |
| 4022        | 3.88 (9,8)       | 1.94 (4,9)      | 0.5 (1,3)       |
| 4023        | 2.56 (6,5)       | 3.5 (8,9)       | 1.75 (4,4)      |
| 4024        | 7 (17,8)         | 3.5 (8,9)       | 1 (2,5)         |
| 4025        | 7 (17,8)         | 5 (12,3)        | 0.5 (1,3)       |

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

**Note:** Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.

| Product No. | Diameter, in. (cm) | Height, in. (cm) |
|-------------|--------------------|------------------|
| 4011        | 2.38 (6,0)         | 0.88 (2,2)       |
| 4012        | 3.38 (8,6)         | 0.88 (2,2)       |
| 4013        | 1.81 (4,6)         | 4 (10,2)         |
| 4014        | 4.06 (10,3)        | 2.34 (6,0)       |
| 4015        | 3.81 (9,7)         | 4.69 (11,9)      |

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

## Container Properties

| Typical Property       | Test Method | 4540 EVA Copolymer Compound / 1801 Sheet Stock Typical Value* | 4520 Polypropylene Compound / 1840 Sheet Stock Typical Value** |
|------------------------|-------------|---|--|
| Hardness               | ASTM D2240  | 58 - 62 Shore D   | 67 - 71 Shore D  |
| Heat Deflection Temp.  | ASTM D648   | 38° - 43°C @ 264 PSI  | 100°C @ 66 PSI; 50°C @ 264 PSI                                 |
| Water Absorption       | ASTM 570    | 0.1 - 0.2%  | 0.1 - 0.2%   |
| Vicat Softening        | ASTM D1525  | 88° - 92°C  | 148°C  |
| Flammability           | ASTM D635   | 4.5 - 5.5 cm/min.   | 2 cm/min.  |
| Impact Resistance      | ASTM D256   | 2.9 - 3.7 ft.-lbs./in. @ 72°F                                 | 8 - 10 ft.-lbs./in. @ 72°F                                     |
| Notched Izod           |             | 0.6 - 1.3 ft.-lbs./in. @ 25°F                                 | 7 - 9 ft.-lbs./in. @ 25°F                                      |
| Maximum Temp. Exposure | 3M          | 150°F   | 180°F  |
| Tensile Strength       | ASTM D638   | 1700 - 2000 PSI   | 2800 - 3000 PSI  |
| Flex Modulus           | ASTM D790   | 40,000 - 50,000 PSI   | 130,000 - 150,000 PSI  |
| Mold Shrinkage         | ASTM 955    | 15 - 20 mil/in.   | 10 - 20 mil/in.  |
| Electrical Conductance |             |   |  |
| Volume Conductive      | ASTM D991   | < 500 ohm-cm  | < 500 ohm-cm   |
| Chemical Resistance    | ASTM D543   |   |  |
| Alcohol                |             | Resistant   | Resistant  |
| Aromatic Hydrocarbons  |             | Severe Attack   | Severe Attack  |
| Aliphatic Hydrocarbons |             | Moderate Attack   | Moderate Attack  |
| Concentrated Acids     |             | Slight Attack   | Slight Attack  |
| Concentrated Alkalines |             | Slight Attack   | Slight Attack  |
| Dilute Acids           |             | Resistant   | Resistant  |
| Dilute Alkalines       |             | Resistant   | Resistant  |
| Kerosene               |             | Severe Attack   | Severe Attack  |
| Ketones (Acetone)      |             | Moderate Attack   | Moderate Attack  |
| Mineral Oil            |             | Slight Attack   | Slight Attack  |
| Oil and Gasoline       |             | Moderate Attack   | Moderate Attack  |

\*EVA copolymer technical data for 4540 Resin; 1801; 4251-4254A Snap on Covers.




\*\*Polypropylene technical data for 4520 Resin; 1840; 4011-4016 Round Containers and Lids; 4021-4025 Hinged Containers; 5701 Single Device Carriers; and 8520-8523 Single Card Carriers.

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.

# Test Equipment

## 3

*3M offers a complete selection of test equipment to verify the correct functioning of static control systems. These test products measure static voltages on objects and surfaces, verify air ionizer performance and test static control wrist straps and footwear.*












# Test Equipment

Phone: 1-800-328-1368 or [www.3M.com/esd](http://www.3M.com/esd)

|   | 3M™ Test Equipment  | Measures  | Application  |
|---|---|---|--|
|    | <b>701</b> Test Kit for Static Control Surfaces (Certified only)          | Resistance: surface-to-ground and surface-to-surface        | Velostat™ Mats and Sheets 1800 Series<br>Workstation Kits 8000 Series<br>Mats 8200 Series<br>Laminate 8300 Series<br>Floor Tile 8400 Series<br>Field Service Kits 8500 Series<br>Rubber Mats 8800 Series<br>Epoxy Flooring 8900 Series<br>Anti-Fatigue Mats 9500 Series<br>Other static-dissipative surfaces and surface treatments  |
|   | <b>711</b> Charge Analyzer (Certified only)                               | Charge retention/drainage<br><br>Charge generation/drainage | Ionized Air Blowers 960/963<br>Ionized Air Gun 980<br>Other benchtop air ionizers<br>Static Shielding Bags<br>Velostat Mats and Sheets 1800 Series<br>Mats 8200 Series<br>Other mats<br>Floor Tile 8400 Series<br>Rubber Mats 8800 Series<br>ESD Epoxy Flooring 8900 Series<br>Anti-Fatigue Mats 9500 Series<br>Wrist Straps 2200 Series<br>Shoe Straps 2050 Series<br>Other wrist straps and shoe straps<br>Tapes |
|  | <b>718</b> Static Sensor (Non Certified and Certified versions available) | Static Voltages   | Objects and Surfaces   |
|  | <b>718A</b> Air Ionizer Test Kit  | Ion balance<br>Static decay                                 | Air Ionizers   |
|  | <b>724</b> Continuous Workstation Monitor                                 | Resistance  | Velostat™ Mats and Sheets 1800 Series<br>Mats 8200 Series<br>Hard Laminate 8300 Series<br>Mats 8800 Series<br>Dual Conductor Wrist Straps  |





|   | 3M™ Test Equipment  | Measures                              | Application   |
|---|---|---------------------------------------|---|
|    | <b>725</b> Continuous Wrist Strap Monitor   | Resistance                            | Dual Conductor Wrist Straps   |
|   | <b>740</b> Wrist Strap and Footwear Tester (Non Certified and Certified versions available) | Resistance                            | Single Conductor Wrist Straps<br>Other single conductor wrist straps                            |
|  | <b>746</b> Wrist Strap Tester (Non Certified and Certified versions available)              | Resistance                            | Single Conductor Wrist Straps<br>Other single conductor wrist straps                            |
|  | <b>747</b> Shoes/Wrist Strap Tester (Certified only)  | Resistance                            | Single Conductor Wrist Straps<br>Other single conductor wrist straps<br>Data logging capability |
|  | <b>790</b> Static Monitor   | Voltage                               | Dual Conductor Wrist Straps   |
|  | <b>791W</b> Wrist Strap Monitor   | Voltage                               | Dual Conductor Wrist Straps   |
|  | <b>791E</b> Equipment Ground Monitor  | Resistance<br>Data logging capability | Monitoring equipment grounds  |



## Test Kit 701

The 3M™ Test Kit 701 contains a lightweight, user-friendly megohmmeter plus all of the components needed to make testing mats and other surfaces simple and accurate. All of the items are packaged in a foam-lined carrying case.

The kit meets the intent of ANSI/ESD Standard 4.1, “Worksurfaces – Resistive Characterization.” ANSI/ESD Standard 7.1, “Floor Materials – Resistive Characterization of Materials,” and MIL-PRF-87893, “Workstation, Electrostatic Discharge (ESD) Control,” for auditing purposes. The meter has separate scales and test settings for measuring surface-to-ground and surface-to-surface resistance at two prescribed test voltages (10V and 100V), and system continuity. The easy-to-read scales are both color-coded and numbered.



Test Kit 701



## Product Referral Generator

|  |           |
|--|-----------|
| Floor Mats/Runners 8200 Series.....              | pg. 18    |
| Dissipative Rubber Mats/Runners 8800 Series..... | pg. 19    |
| Anti-Fatigue Mats/Runners 9500 Series.....       | pg. 22    |
| Static Conductive Floor Tile 8400 Series.....    | pg. 66-67 |
| Epoxy Flooring 8900 ESD.....                     | pg. 68-69 |

| Product No. | Description   |
|-------------|---|
| 701         | <p>Test Kit for Static Control Surfaces. Also available in Certified.</p> <p>Kit contains:</p> <ul style="list-style-type: none"> <li>• 1 Megohmmeter 12 oz. (340 g)<br/>1.8 x 3.3 x 4.6 in. (4,57 x 8,38 x 11,68 cm)</li> <li>• 2 Test Weights 5 lbs. (2,27 kg) each</li> <li>• 2 Test Leads, 10 ft. (3 m) each</li> <li>• 1 Insulated Bulldog Clip</li> <li>• 1 Alligator Clip</li> <li>• 1 Continuity Test Plate</li> <li>• 2 Batteries (22.5V and 1.5V)</li> <li>• 1 Operator's Manual</li> <li>• 1 Molded Carrying Case</li> </ul> |
| 701-L       | Test Leads  |
| 701-M       | Megohmmeter only  |
| 701-W       | 5 lb. Test Weight   |

### Test Kit Properties

| Product                | Item  | Typical Properties   |
|------------------------|---|--|
| Kit                    | Weight:   | 14 pounds (6,35 kg)  |
|                        | Case Dimensions:  | 5.125" x 10" x 13.5"<br>(13,02 cm x 25,4 cm x 34,29 cm)                                  |
|                        | Case Material:  | Blow-molded, high density polyethylene with foam inserts                                 |
|                        | Case Color:   | Gray   |
| Meter                  | Weight:   | 12 ounces (0,34 kg)  |
|                        | Dimensions:   | 1.8" x 3.3" x 4.6"<br>(4,57 cm x 8,38 cm x 11,68 cm)                                     |
|                        | Resistance Ranges:                                      |  |
|                        | Continuity Test Mode                                    | 0 – 10M Ω (internal R=500 K Ω)   |
| 10V Surface Test Mode  | 10 <sup>5</sup> – 10 <sup>11</sup> Ω (internal R=2 M Ω) |  |
| 100V Surface Test Mode | 10 <sup>5</sup> – 10 <sup>11</sup> Ω (internal R=2 M Ω) |  |
| Weights                | 2 Test Weights:   | 5 pounds (2,27 kg) each  |
|                        | Dimensions:   | Diameter – 2.5 in. (6,35 cm)<br>Height – 5.06 in. (12,85 cm);<br>includes handle and pad |
|                        | Pad Material:   | Conductive silicone rubber   |
|                        | Pad Dimensions:   | Diameter – 2.5 in. (6,35 cm)<br>Thickness – 0.25 in. (0,64 cm)                           |
| Leads                  | Length:   | 10 feet (3,05 m)   |
|                        | Wire Size:  | 18 gauge   |
|                        | Insulation:   | Silicone rubber  |
|                        | Diameter:   | 0.125" (0,32 cm)   |
| Power Supply           | Batteries (2):  | 22.5 volt (Eveready #505 or equivalent) and 1.5 volt (AA).                               |



## Charge Analyzer

The 3M™ Charge Analyzer 711 was designed to test the performance of products used for the purpose of static control and elimination. The Charge Analyzer 711 can be used as a laboratory analytical tool, evaluating the performance of ionizing equipment, static-protective packaging, worksurfaces, and personnel grounding systems. It is very effective for use as a demonstration tool in employee static awareness training sessions.

The lightweight and compact construction of the unit offers versatility in the workplace. The modular internal construction simplifies modifications and repair by exchange of the functional printed circuit boards. All parameter settings are controlled via a built-in EEPROM. Periodic calibrations can be performed without the need to open the chassis. When the analyzer is switched off, all last set parameters are stored in the EEPROM. These parameters are defaulted to when the unit is switched on again. The 711 is powered by built-in rechargeable NiMH-batteries or an AC wall plug-in adapter. All interfacing connections are made at the rear of the unit.

### Product No.

### Description

711

The Charge Analyzer 711 is shipped in a durable black case with foam interior, containing the following accessories:  
(Certified only)

- Cup electrode
- Plate electrode
- Cylinder electrode
- AC/DC Adapter, DC 12 V / 500 mA
- Sensor cover
- Teflon™ measuring lead, 1 m
- Grounding cord with alligator clip
- RS 232 interface cable
- 50 mm (2 inches) high conductive container with insulating handle
- Insulated bulldog clip
- Metal spacers (3) with thread, 76 mm, (3 in. length)
- Software disk for data acquisition
- Operating instructions
- Transport case
- Certificate of Conformity
- Sensor, 711 RS for measuring electrostatic fields, with 2 meter cord (6.5 ft.)



Charge Analyzer 711



Charge Analyzer 711





# Test Equipment

## 3M™ Charge Analyzer 711 Properties

| Item                                    | Typical Properties   |
|---|--|
| Dimensions                              | Base unit: 6 x 6 x 6 inches (15,2 x 15,2 x 15,2 cm)  |
| Weight                                  | 3.53 lbs. (1,6 kg)   |
| High Voltage Power Supply (internal)    | > 1100 V positive or negative (current limiting resistor: 10 MΩ)   |
| Low Voltage Power Supplies              | Built-in NiMH-rechargeable batteries, 1400 mAh<br>AC/DC Adapter: secondary side, DC 12 V/500 mA  |
| Operating Time (rechargeable batteries) | 4 hours (approximately) with full charge   |
| Storage Memory Capacity                 | 128 k EEPROM (e.g. sufficient for approximately 100 CPM*-measurements)   |
| Response Time                           | 0 to 100%; 100 ms  |
| Impedance                               | 10 <sup>15</sup> Ω (Teflon™-separators cleaned)  |
| Accuracy                                | ± 2.5% of range end value (digitized)<br>± 5% for the analog output (for 1000 Volt range)<br>± 10% for the analog output (25, 100, 500 and 5000 Volt ranges) |
| Operating Functions                     | CPM* (positive/negative/automatic), voltmeter and fieldmeter   |
| Interfaces                              | Analog output ± 2 V (± 1 V, in 500 V range for voltmeter),<br>serial PC-COM, and external field sensor type 711 RS   |
| Displays                                | Two, 11-segment positive & negative LED-bar charge indicators<br>16-digit alphanumeric dual row LCD  |
| Settings - CPM* Operating Function      | Starting voltage: 600 V - 1200 V in 1 V-steps<br>Stop voltage: 1 V - 500 V in 1 V-steps (in decimal mode)  |
| Static Decay Time                       | 0.1 seconds - 99.9 seconds   |
| Offset-Voltage Time                     | 1 - 10 seconds in 1 second steps and 10 - 60 seconds in 10 second steps  |
| Voltmeter Operating Function            | Ranges: 25 V, 100 V, 500 V, 1.0 kV, 5.0 kV and auto range  |
| Fieldmeter Operating Function           | Ranges: Manual 1.25 kV/m, 5 kV/m, 25 kV/m, 50 kV/m, 250 kV/m, and automatic  |
| Plate Electrode                         | SS-steel (152 x 152) mm/(6 x 6) inches, removable, capacitance (20 ± 2) pF   |
| Cup Electrode                           | Gold-plated electrode with 4mm-banana socket, for voltage measurements   |
| Selection of Operating Function         | Pre-setting is "FIELDMETER," additional automatic settings by applying the plate or cup electrode  |
| Operating Temperature                   | 32°F to 113°F (0°C to 45°C)  |
| Humidity                                | Maximum 60 %<br>Note: At high relative humidity, charge leakage may occur affecting the decay time measurement.  |
| Storage Temperature                     | -22°F to 140°F (-30°C to 60°C)   |
| Declaration of Conformity               | EN 60204-1/85<br>EN 60204-1/91<br>EN 61010 (SAFETY)<br>EN 50082-1<br>EN 50082  |

\*Charge Plate Monitor




## Wrist Strap Tester

The 3M™ Wrist Strap Tester 746 can be used to test wrist straps in a variety of situations, from daily testing in a production facility to periodic testing at remote sites or field service locations. This versatility allows the Wrist Strap Tester 746 to be the standard for all applications in your company.

The tester is supplied with an AC adapter, but it also contains a long-life lithium battery as back-up power for portable applications or during power failures. (A “battery” light notifies the user when the battery needs replacement.)

As with other 3M wrist strap testers, the unit is easy to use. It can test the entire wrist strap system while it is being worn, or it can test the individual components to isolate a fault condition.

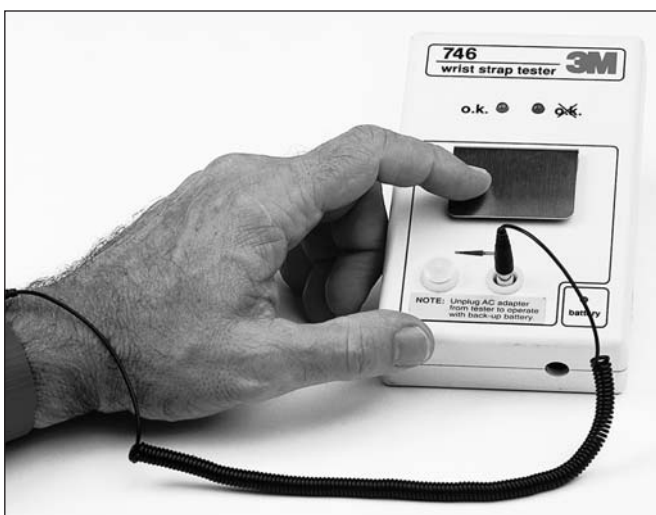

Wrist Strap Tester 746



AC Adapter 746P

| Product No. | Description  |
|-------------|--|
| 746         | Wrist Strap Tester supplied with an AC adapter, a lithium battery, and a wall mounting kit. Also available in Certified. |
|             | <b>Size, in. (cm)</b>  |
|             | 6.25 x 3.75 x 1.25 (15,8 x 9,5 x 3,3)  |

### Wrist Strap Tester 746 Properties

| Item                             | Typical Properties   |
|----------------------------------|--|
| Weight                           | 7 oz. (200 g) without battery  |
| Power                            | 9-volt regulated 75 mA AC/DC adapter (supplied with 746)   |
| Battery                          | 9-volt lithium manganese (NEDA 1604LC) (supplied with 746)<br>*does not contain mercury, cadmium, or lead. |
| Test Voltage                     | 19 Volts DC, ± 1 volt (open circuit)   |
| Resistance Ranges                | Upper limit – 10 M ohms ± 10%<br>Lower limit – 750K ohms +20% -0%  |
| Wall Mounting                    | 3M™ Dual Lock™ System  |
| <b>AC Adapter Specifications</b> |  |
| Input Voltage:                   | AC 120 V   |
| Output Voltage:                  | DC 9 V (Regulated)   |
| Output Current:                  | 75 mA  |
| Output Connector                 |  |
| Dimensions:                      | 5.5 mm (O.D.) x 2.1 mm (I.D.) x 11 mm (L)  |
| Output Connector                 |  |
| Polarity:                        | Center Negative  |



# Test Equipment

## Shoes/Wrist Strap Tester

### 3M™ Shoes/Wrist Strap Tester 747

Daily inspection and recording of wrist straps and shoes testing are very important as a fundamental countermeasure against static on personnel. A fully functional resistance tester, the new 3M Shoes/Wrist Strap Tester 747 makes it possible to control both in a single unit. Use of the external data port allows automatic recording of test results eliminating manual recording and possible errors.

#### Features

- Checks personnel wearing wrist straps, ESD shoes and heel straps against preset resistance limits
- Actual measurements are indicated on a 3½ digit display and by LED lamps
- Test results available on RS-232C Serial Port and output jack
- Testing data automatically recorded when utilizing the 3M™ Data Logging Software 747DLS

#### ESD Shoe and Heel Strap Testing

- Electrical resistance of ESD shoes and heel straps is measured and compared to preset limits.
- Set value for the upper and lower resistance limits can be varied. Upper limit: 10M ohms, 35M ohms, or 100M ohms. Lower limit: 100k ohms, 1.0M ohms.
- LCD display (3½ digit) indicates actual resistance measurement value.\*
- LEDs on the tester indicate Low, OK, and High test results.
- Measurement requires standing on the Shoe Testing Plate and pressing the touch panel.

\*Includes body resistance

#### Wrist Strap Testing

- Electrical resistance of wrist straps is measured and compared to preset limits.
- Set value for an upper resistance limit can be varied. (5M ohms, 10M ohms and 35M ohms). Lower resistance limit 650K ohms preset internally.
- LCD display (3½ digit) indicates actual resistance measurement value.\*
- LEDs on the tester indicate (Low, OK and High) test results.
- Measurement requires inserting ground cord plugs into a test jack and pressing the touch panel.

\*Includes arm to wrist band contact resistance

#### External Output Functions

- RS-232C Serial Data Port provides resistance value and pass/fail test result information for computer data logging. Used with 3M Data Logging Software 747DLS.
- Open collector output configuration provides High and Low signal levels for pass/fail test result indication. When used with an external relay door, entries can be controlled.

| Product No. | Description                               |
|-------------|---|
| 747         | Shoes/Wrist Strap Tester (Certified only) |

#### Shoes/Wrist Strap Tester 747 Properties

| Item                               | Typical Properties  |
|------------------------------------|---|
| Dimensions                         | 7.7" x 4.7" x 1.89" (H x W x D)<br>196 mm x 120 mm x 48 mm                        |
| Weight                             | 1.2 lb. (550 g) without batteries   |
| Power Requirements                 | AA (LR6) alkaline battery (1.5 VDC x 6)<br>or AC adapter (9 VDC, center positive) |
| Environmental Operating Conditions | Temperature range (0° to 40°C)<br>80% Relative Humidity                           |



Shoes/Wrist Strap Tester 747



## Data Logging Software

### 3M™ Data Logging Software 747DLS

Designed to work with the 3M™ Shoes/Wrist Strap Tester 747, the 3M™ Data Logging Software 747DLS offers you a complete system of testing and recording results of your wrist straps and footwear. Our complete system performs an accurate resistance measurement of either or both your wrist straps and footwear. Once completed, the results will then be automatically saved on a PC which allows efficient data storage and faster data retrieval.

The software communicates via RS-232 signal to a personal computer and can handle up to eight stations using a single PC. Longer distances of up to 4000 ft. (1200 m) can also be accommodated.

#### Features

- Electronic data logging eliminates manual logging thus provides highly reliable record
- Can accommodate up to 8 stations which saves money
- Can be used with barcode, magnetic stripe or proximity card readers/identification cards
- Can be used for up to 4000 ft. (1200m), allowing it to serve almost an entire facility
- Incorporates a pilot lamp in monitoring so it can identify which testing stations are currently being used
- Printable records feature allows hard copies to be kept for documentation

#### System Requirements

Windows™ 95, 98 2nd Edition, 2000 with Service Pack 2 and Millenium Edition. Pentium 133 MHz; 32 MB RAM; 26 MB Hard Disk Space; 800x600 True Color 32 Bit Display. It will also require one (1) PCI available slot, two (2) are recommended for multi-station. For a single station, it will only require two (2) communications ports available (COM1 & COM2).

| Product No. | Description           |
|-------------|-----------------------|
| 747DLS      | Data Logging Software |



Shoes/Wrist Strap Tester 747

#### Card Reader Technical Requirements

| Serial Interface Specification |   |
|--------------------------------|---|
| Bit Rate                       | 110, 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 (selectable)  |
| Word Length                    | Data Format-4, 5, 6, 7, 8 (selectable); Parity Bit-Even, Odd, None, Mark, Space (selectable); Stop Bit-1, 1.5, 2 (selectable) |
| Handshaking (Flow Control)     | None, Xon/Xoff, RTS/CTS, RTS/Xon/Xoff (selectable)  |
| Magnetic Card Reader Data      |   |
| Message Indicator              | Start of Text - Single ASCII character; End of Text - Single ASCII character  |
| Track Framing Characters       | Track 1 Start - Single ASCII character; Track 1 End - Single ASCII character  |
|                                | Track 2 Start - Single ASCII character; Track 2 End - Single ASCII character  |
|                                | Track 3 Start - Single ASCII character; Track 3 End - Single ASCII character  |
| Barcode Reader Data            |   |
| Message Indicator              | Start of Text - Single ASCII character; End of Text - Single ASCII character  |
| Proximity Card Reader Data     |   |
|                                | Start of Text - Two ASCII characters; End of Text - CR, LF, CR/LF (selectable)  |



## Wrist Strap and Footwear Tester



Wrist Strap and Footwear Tester 740

The 3M™ Wrist Strap and Footwear Tester 740 is an AC-powered unit designed to be wall-mounted in a production facility for daily testing of employees' static control wrist straps. Use of the optional 3M™ Shoe Electrode 741 attachment allows the tester to be used as a footwear tester as well. The optional Shoe Electrode 741 is a test plate that connects to the Wrist Strap and Footwear Tester 740. By standing on the shoe electrode, personnel can use the wrist strap and footwear tester to check the operation of static control footwear, heel straps and the like. This electrode, constructed of rugged stainless steel in a molded plastic base, must be ordered separately.

Simple to operate, the unit has several useful features and options. Red and green LEDs give a clear "go" or "no go" indication. The user can select any of four different resistance levels, making the tester a versatile instrument to meet varying industry, corporate and global standards. The unit tests the wrist band and cord while they are being worn, and can also test each component independently to isolate an indicated fault. There is also a digital output that can be used to interface with a computer, automatic door lock, alarm or other control device.

The wrist strap and footwear tester comes with the base unit, output connector, 3M™ Dual Lock™ Wall-Mounting System and template, cover for the wrist strap plug-in jack and the AC/DC transformer.

### Wrist Strap Tester 740 Properties

| Item                    | Typical Properties   |
|-------------------------|--|
| Dimensions              | 5.43 in. x 7.48 in. x 2.09 in.<br>(13,8 cm x 19,0 cm x 5,3 cm)   |
| Weight                  | 15.75 oz. (450 gm)   |
| Power Supply            | 27 volt DC transformer,<br>150 mA (AC/DC adapter supplied)<br>6 ft. (1,8 m) wire                       |
| Test Voltage            | 20 volts DC, ± 1 volt (open circuit)   |
| Resistance Ranges       | Lower limit: 750K ohms   |
| Upper Limit Wrist Strap | 2, 5, 10 and 35M ohms  |
| Upper Limit Footwear    | 10, 35, 50 and 100M ohms   |
| Accuracy                | + 20%,- 0% for 750K ohms lower limit<br>± 10% for 2M, 5M, 10M, 35M and 50M ohms<br>± 20% for 100M ohms |
| Output                  | Open collector at pins 1, 2, 4 and 5.<br>DC return at pin 6. + 5 volts at pin 3.                       |
| Wall Mounting           | 3M™ Dual Lock™ System.   |

### Shoe Electrode 741 Properties



| Item         | Typical Properties  |
|--------------|---|
| Dimensions   | 20 in. x 16 in. (50,8 cm x 40,6 cm)   |
| Weight       | 5 lbs. (2,3 kg)   |
| Construction | 1 mm stainless steel plate and molded plastic base  |
| Other        | 3M adhesive strip prevents unit from sliding while in use.<br>Shoe electrode interconnect cord 6 ft. (1,8 m). |

Note: The Shoe Electrode 741 is not included with the Wrist Strap and Footwear Tester 740 and must be ordered separately.





## Air Ionizer Tester/Field Meter and Charger

### Static Sensor 718

The 3M™ Static Sensor 718 is an easy-to-use, hand-held instrument designed to measure static voltage, on objects and surfaces, arising from electrostatic charge buildups. This instrument can play a valuable role in an organization's ESD-control program by helping the user locate and quantify ESD trouble-spots.

#### Features

- Small-size, lightweight, conductive plastic housing
- Membrane switches for Power, Range/Zero, and Hold functions
- Digital, LCD (liquid-crystal) display is easy to read and updates quickly
- Ranging systems assist user in making quick and easy measurements
- Measurements accurate to 5%
- Output jack available for continuous measurements



Static Sensor 718

### Air Ionizer Test Kit 718A

The 3M™ Air Ionizer Test Kit 718A, when used in conjunction with the Static Sensor 718, can be used for periodic verification of air ionizer performance. The test kit consists of a charge plate and a charger.



Air Ionizer Test Kit 718A

| Product No. | Description   |
|-------------|---|
| 718         | Static Sensor, including meter, Operator's Manual, and Certificate of Performance verification. Also available in Certified.    |
| 718A        | Air Ionizer Test Kit, including charge plate assembly, charger, Operator's Manual, and Certificate of Performance verification. |

#### Static Sensor 718 Properties

| Item                 | Typical Properties   |
|----------------------|--|
| Dimensions           | 0.85" (H) x 2.4" (W) x 4.15" (L)<br>2.2 cm (H) x 6.1 cm (W) x 10.5 cm (L)  |
| Weight               | 4.5 oz. (128 g) with battery   |
| Power Requirements   | One 9-volt alkaline battery (not included)                                 |
| Measurement Ranges   | 0 – 2 kV Low Range<br>0 – 20 kV High Range                                 |
| Voltage Display      | 3 ½ digit liquid crystal display   |
| Distance indicator   | LED targets. Aligned targets indicate 1 in. (2.54 cm) measurement distance |
| Measurement accuracy | Within 5% of actual voltage  |
| Certifications       | UL, C-UL, CE, CB-scheme, NOM   |

#### Air Ionizer Test Kit 718A Properties

| Item                         | Typical Properties   |
|------------------------------|--|
| Charge Plate Assembly        | Per ESD Association Standard Practice - 3.3                              |
| Charge Plate assembly Weight | 2.5 oz (70 g)  |
| Charger Dimensions           | 0.85" (H) x 2.4" (W) x 5.0" (L)<br>2.2 cm (H) x 6.1 cm (W) x 12.7 cm (L) |
| Charger Weight               | 6 oz. (170 g) with battery   |
| Charger Power Requirements   | One 9 volt alkaline battery  |
| Charger Output               | 1100V minimum for positive or negative voltage                           |
| Certifications               | UL, C-UL, CE, CB-scheme, NOM   |



### Product Referral Generator

|                                     |        |
|-------------------------------------|--------|
| Mini Air Ionizer 960 .....          | pg. 35 |
| Benchtop Air Ionizer 963/963E ..... | pg. 34 |
| Ionized Air Gun 980/980E .....      | pg. 33 |
| Overhead Air Ionizer 990 .....      | pg. 32 |





*Notes:*

# Training

# 4

*To help create and maintain the highest standards of protection against ESD in the workplace, 3M offers several options for employee training and program development. A two-day, intensive workshop is conducted four times a year in Austin, Texas as a “train-the-trainer” or for the ESD program manager. Awareness, testing and measuring, standards development, and much more, comprise this course. 3M also regularly conducts local one-day static awareness seminars for electronics manufacturers, so contact your local 3M representative for more information. When employee training is needed, 3M can provide solutions as well. As part of our product support, 3M can deliver various versions of training for your organization, be it basic or advanced. Having the facts presented properly, in terms easily understood, can help facilitate your ESD control program.*





## 3M Hosts ESD Training on Static Control in Austin

3M offers an in-depth training program on static control at the 3M Austin Center. The two-day course is designed for people responsible for implementing or managing a company's ESD program.

The course content, designed for the beginner to intermediate level, will cover such topics as:

- What are the foundations of ESD? This includes terminology, basic electricity and its relationship to ESD, basic ESD controls and how parts fail.
- How can static electricity be controlled?
- How do I conduct a plant survey or audit?
- What are appropriate surfacing and grounding materials and techniques?
- How and why do I use static-protective packaging materials?

- What is ionization, how do I properly test ionizers, and how do I use ionization effectively?
- What about field service? Do my customers or I need it?
- What do I need to know about testing and measuring – frequency of tests, methods, equipment, interpretation of results and use of appropriate test techniques?
- How and when do I use continuous wrist strap and/or work station monitoring – installation, operation and attributes?
- How do I know if I have a static problem?

Please contact Customer Service at 1-800-328-1368 for registration information and class schedule. To view current agenda, or learn more about 3M training seminars, refer to [www.3M.com/market/electronic/ehpd/esd\\_training](http://www.3M.com/market/electronic/ehpd/esd_training)

## 20.20 Standard Requires Training

by Bill Pellegrin, ESD Training Manager

The new ANSI/ESD 20.20 standard truly breaks new ground in the standardization of static control for electronics, but are you aware that it contains a requirement for training?

If training has been nonexistent or scattered in your organization, you will need to make it a high priority in adopting 20.20. You must first decide on a schedule for training. Will it be once a year, twice a year, or more often? Ideally, the schedule will correspond to the needs of your organization. Perhaps you expect to hire large numbers of new employees. Or maybe you must train employees in rapidly changing technologies and manufacturing methods. The schedule should reflect those needs.

Who is trained and on what? Some organizations require that all employees, from the general manager to the clean-up crew, take the same training. Other organizations develop a high level of training for assemblers, a medium level for inventory and shipping clerks, and a basic level of training for office staff and others who rarely enter the manufacturing area.

How will you provide the training? Will you use "live" instructors, video tapes, individualized computer-based training programs, or a combination of these methods? From my experience, I have found that a "live" instructor is the most effective because the training is interactive. The instructor can answer questions and tailor the training to the trainees' education and experience. The video approach is the least effective because it requires no interaction, only passive watching and listening.

How will you verify trainees' understanding of static control? You can accomplish this through a written test, on-the-job observation, computer-based testing or a personal interview. My preference would be for the class to verbally review all the critical points of training as the means to check their retention, and follow that with on-the-job observation to ensure they are practicing proper static control procedures.

Finally, 20.20 training should include a mechanism for updating your employees in response to changes in product sensitivity, introduction of new products, upgrades in manufacturing techniques, and other changes. Ideally, you will provide training with every change so employees can adjust accordingly.

Training is so fundamental to an effective program of static control that it has been made a requirement under the ANSI/ESD 20.20 standard. When your employees understand how electrostatic discharge occurs, the extent of its damage, and how to protect against it, they will be more likely to use static protection equipment properly and abide by static control procedures. They will better understand their role in producing high quality, profitable products.



## Charge Analyzer

The 3M™ Charge Analyzer 711 was designed to test the performance of products used for the purpose of static control and elimination. The Charge Analyzer can be used as a laboratory analytical tool, evaluating the performance of ionizing equipment, static-protective packaging, work-surfaces, and personnel grounding systems. It is very effective for use as a demonstration tool in employee static awareness training sessions.

The lightweight and compact construction of the unit offers versatility in the workplace. The modular internal construction simplifies modifications and repair by exchange of the functional printed circuit boards. All parameter settings are controlled via a built-in EEPROM. Periodic calibrations can be performed without the need to open the chassis. When the analyzer is switched off, all last set parameters are stored in the EEPROM. These parameters are defaulted to when the 711 is switched on again. The Charge Analyzer is powered by built-in rechargeable NiMH-batteries or an AC wall plug-in adapter. All interfacing connections are made at the rear of the unit.

| Product No. | Description  |
|-------------|--|
| 711         | <p>The Charge Analyzer 711 is shipped in a durable black case with foam interior, containing the following accessories:</p> <ul style="list-style-type: none"> <li>Cup electrode</li> <li>Plate electrode</li> <li>Cylinder electrode</li> <li>AC/DC Adapter, DC 12 V / 500 mA</li> <li>Sensor cover</li> <li>Teflon™ measuring lead, 1 m</li> <li>Grounding cord with alligator clip</li> <li>RS 232 interface cable</li> <li>50 mm (2 inches) high conductive container with insulating handle</li> <li>Insulated bulldog clip</li> <li>Metal spacers (3) with thread, 76 mm, (3 in. length)</li> <li>Software disk for data acquisition</li> <li>Operating instructions</li> <li>Transport case</li> <li>Certificate of Conformity</li> <li>Sensor, Model 711 RS for measuring electrostatic fields, with 2 meter cord (6.5 ft.)</li> </ul> |



Charge Analyzer 711



Charge Analyzer 711



## Product Referral Generator

Also see Test Equipment Section ..... pg.49-59





## 3M™ Charge Analyzer 711 Properties





| Item                                    | Typical Properties  |
|---|---|
| Dimensions                              | Base unit: 6 x 6 x 6 inches (15,2 x 15,2 x 15,2 cm)   |
| Weight                                  | 3.53 lbs. (1,6 kg)  |
| High Voltage Power Supply (internal)    | > 1100 V positive or negative (current limiting resistor: 10 MΩ)  |
| Low Voltage Power Supplies              | Built-in NiMH-rechargeable batteries, 1400 mAh<br>AC/DC Adapter: secondary side, DC 12 V/500 mA   |
| Operating Time (rechargeable batteries) | 4 hours (approximately) with full charge  |
| Storage Memory Capacity                 | 128 k EEPROM (e.g. sufficient for approximately 100 CPM*-measurements)  |
| Response Time                           | 0 to 100%; 100 ms   |
| Impedance                               | 10 <sup>15</sup> Ω (Teflon™-separators cleaned)   |
| Accuracy                                | ± 2.5% of range end value (digitized)<br>± 5% for the analog output (for 1000 Volt range)<br>± 10% for the analog output (25, 100, 500 and 5000 Volt range) |
| Operating Functions                     | CPM* (positive/negative/automatic), voltmeter and fieldmeter  |
| Interfaces                              | Analog output ± 2 V (± 1 V, in 500 V range for voltmeter),<br>serial PC-COM, and external field sensor type 711 RS  |
| Displays                                | Two, 11-segment positive & negative LED-bar charge indicators<br>16-digit alphanumeric dual row LCD   |
| Settings - CPM* Operating Function      | Starting voltage: 600 V - 1200 V in 1 V-steps<br>Stop voltage: 1 V - 500 V in 1 V-steps (in decimal mode)   |
| Static Decay Time                       | 0.1 seconds - 99.9 seconds  |
| Offset-Voltage Time                     | 1 - 10 seconds in 1 second steps and 10 - 60 seconds in 10 second steps   |
| Voltmeter Operating Function            | Ranges: 25 V, 100 V, 500 V, 1.0 kV, 5.0 kV and auto range   |
| Fieldmeter Operating Function           | Ranges: Manual 1.25 kV/m, 5 kV/m, 25 kV/m, 50 kV/m, 250 kV/m, and automatic   |
| Plate Electrode                         | SS-steel (152 x 152) mm/(6 x 6) inches, removable, capacitance (20 ± 2) pF  |
| Cup Electrode                           | Gold-plated electrode with 4 mm-banana socket, for voltage measurements   |
| Selection of Operating Function         | Pre-setting is "FIELDMETER," additional automatic settings by applying<br>the plate or cup electrode  |
| Operating Temperature                   | 32°F to 113°F (0°C to 45°C)   |
| Humidity                                | Maximum 60%<br>Note: At high relative humidity, charge leakage may occur<br>affecting the decay time measurement.   |
| Storage Temperature                     | -22°F to 140°F (-30°C to 60°C)  |
| Declaration of Conformity               | EN 60204-1/85<br>EN 60204-1/91<br>EN 61010 (SAFETY)<br>EN 50082-1<br>EN 50082-2   |


\*Charge Plate Monitor

# Permanent Flooring Products

5

*3M tile and epoxy flooring systems provide a first line of defense against the buildup of static charge on personnel and equipment. Static protective permanent flooring, in conjunction with conductive footwear or heel grounding straps, drains static charge away to ground through the floor. It is a solid foundation for a comprehensive static control system.*





# Permanent Flooring Products

## Static Control Vinyl Floor Tile


3M™ Static Control Floor Tile 8400 Series is a long-term solution to controlling electrostatic discharge. This solid vinyl tile is durable and attractive and can easily be installed by competent flooring contractors. The flexible, resilient tiles are made with only 100% pure vinyl and contain a minimum amount of filler and none of the regrind that can make tile brittle. Both the "conductive" and "static-dissipative" versions are available in a selection of bright, vivid colors. A proprietary manufacturing process completely seals in the conductive carbon medium, resulting in a unique tile that can be easily cleaned and shined to a gloss while maintaining its electrical properties—without the use of an ESD wax or polish.



Static Control Vinyl Floor Tiles 8400 Series


### Key Features

- Lifetime warranty on electrical performance
- 10-year limited warranty on materials
- Long-term ESD protection
- Superior wear resistance and durability
- Low outgassing
- Easy, low-cost maintenance (no waxing — ever!)
- Made with 100% pure homogeneous vinyl; no regrind
- Micro-edged for perfect squareness for ease of installation
- Available in 24.25" size for raised access floors, plus 12", 24", and 36" sizes
- Available in 12 standard colors; custom colors can be formulated
- May be seam welded or self-covered

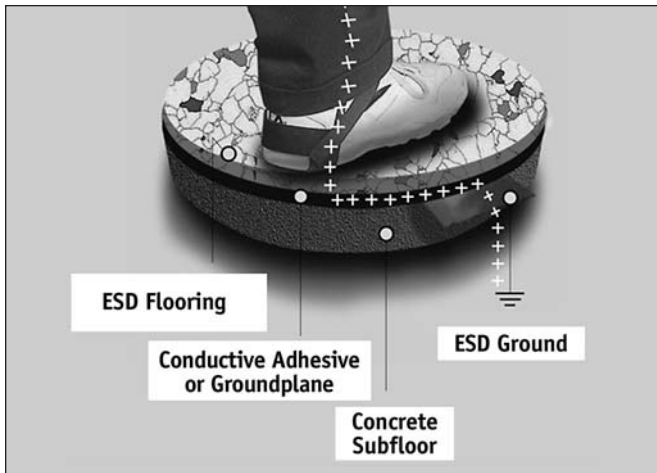

| Product No.        | Color  |
|--------------------|--|
| Static Dissipative |  |
| 8411               | Brown  |
| 8412               | White  |
| 8413               | Gray   |
| 8414               | Blue   |
| 8415               | Green  |
| 8416               | Maroon   |
| 8417               | Black  |
| 8421               | Reverse Brown  |
| 8423               | Reverse Gray   |
| 8424               | Reverse Blue   |
| 8425               | Reverse Green  |
| 8427               | Reverse Black  |
| Conductive         |  |
| 8431               | Brown  |
| 8432               | White  |
| 8433               | Gray   |
| 8434               | Blue   |
| 8435               | Green  |
| 8436               | Maroon   |
| 8437               | Black  |
| 8441               | Reverse Brown  |
| 8443               | Reverse Gray   |
| 8444               | Reverse Blue   |
| 8445               | Reverse Green  |
| 8447               | Reverse Black  |
| Accessories        |  |
| 8403               | Conductive Adhesive. Two-Part Epoxy. (1-gallon unit. covers approx. 135 sq. ft.) |
| 8405               | Calcium Chloride Moisture Test Kit.  |





## Static Control Vinyl Floor Tile

### “No Wax” ESD Tile

One of the key attributes of 3M™ ESD Vinyl Tile is its ability to be cleaned and maintained with a minimum of cost and effort.

See 3M™ ESD Floor Tile 8400 Series instructions for complete maintenance details.

### Unique Cleanability


Our customers report that 3M™ ESD Floor Tile 8400 Series is unique in the industry in its ability to be repeatedly cleaned and then buffed to a high sheen without ever using wax.

With other ESD tiles, normal cleaning procedures may dull the finish and can even degrade the electrical properties. Expensive conductive wax or glaze must then be used to restore their shine and conductivity. 3M Tiles 8400 Series maintain their electrical properties and can be shined like new with simple buffing. The photos below graphically demonstrate this feature.

The floor section shown is a test patch of 3M™ white static-dissipative tile 8412 installed in a high-traffic area of a regional telephone company warehouse. To determine whether the tile could truly withstand serious abuse and then be returned to “like new” condition with simple cleaning and without wax, the section was intentionally left unattended for 11 months as it was subjected to the wear and grime of continual forklift traffic. The result of this abuse is evident in Photo 1.

After being swept, the tile was scrubbed with neutral cleaner, left to dry, and then buffed according to the maintenance procedure established. As Photos 2 and 3 show, in spite of nearly a year of dramatic abuse, the high gloss of the restored floor finish is similar to that of the tile when it is newly installed—without the use of any kind of wax.

This trial is an impressive demonstration of the durability of the 3M ESD tile and its unique “no wax” feature.



1



2



3

### Mechanical Properties (typical)—ESD Tile


| Static-Dissipative Floor Tile (Model numbers 8411-8427)   |   |
|---|---|
| Conductive Floor Tile (Model numbers 8431-8447)   |   |
| Flammability  |   |
| Flame Spread Index (ASTM E162/ASTM E84)   | Meets Class 1 requirements                                      |
| Smoke Development (ASTM E84)  | Meets Class 1 requirements                                      |
| Critical Radiant Flux (ASTM E648/NFPA 253)  | >1.1 w/cm <sup>2</sup>  |
| Physical Specifications   | Meets ASTM F1066-99<br>Meets US Federal Specification SS-T-312B |
| Hardness (ASTM D 2240)  | 55 ± 5 Shore D  |
| Flexibility (CSA 126.2)<br>100 mm mandrel @ 25 C  | Does not break  |
| Abrasion Resistance (ASTM D 3389)<br>Taber H22 wheel, 70 rpm  | 0.445 grams<br>(weight of tile removed per 1000 cycles)         |
| Static Load (ASTM F970)<br>125 lbs, 0.25 in. diameter indenter foot, 24 hours<br>Residual indentation | 2500 PSI point load<br>3% of tile thickness                     |
| 700 lbs., 1.125 in. diameter indenter foot, 24 hours<br>Residual indentation                          | 700 PSI point load<br>1% of tile thickness                      |

### Electrical Properties (typical)—ESD Tile


| Static-Dissipative   | Conductive  |
|--|---|
| Electrical Resistance (Surface-to-ground, ESD S7.1)<br>1 x 10 <sup>6</sup> to 1 x 10 <sup>9</sup> ohms | 2.5 x 10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms |
| Static Generation (With conductive footwear at 20% RH)<br><50 volts                                    | <25 volts   |
| Static Decay (Federal TM 101C, Method 4046 @ 15% RH [5000 volts to 0 volts])<br><0.10 sec.             | <0.03 sec.  |

### Sizes

| Static-Dissipative and Conductive   |
|---|
| 0.125 x 12 x 12 in. (3.2 x 305 x 305 mm)  |
| 0.125 x 24.25 x 24.25 in. (3.2 x 615 x 615 mm)<br>-for raised access floor panels |
| 0.125 x 24.25 x 24.25 in. (3.2 x 610 x 610 mm)                                    |
| 0.125 x 36 x 36 in. (3.2 x 915 x 915 mm)<br>-for seamwelded installations         |

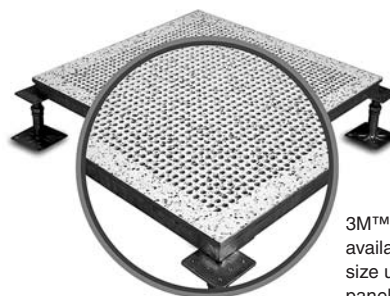

3M™ ESD Floor Tile 8400 Series is available in the special 24.5" x 24.5" size used for raised access floor panels.



# Permanent Flooring Products

## Epoxy Flooring System




The 3M™ ESD Epoxy Flooring System 8900 is a multi-layer, self-leveling liquid epoxy system that hardens to an attractive durable finish. Its formula can be adjusted to produce electrical properties in the conductive range and it can be installed in standard thicknesses from 45 mil to 125 mil (0.017" to 0.125"). Custom thicknesses are also available.

### Key Features

- Tough and abrasion-resistant; excellent for heavy traffic (forklifts, constant cart or foot traffic, etc.).
- Electrical properties can be formulated for resistance-to-ground readings in the conductive ( $2.5 \times 10^4$  to  $1 \times 10^6$  ohms) range.
- 10-year limited warranty on electrical properties, 3-year limited warranty on surface integrity.
- Resistant to most chemicals used in the electronics industry.
- Resistant to fire; does not support combustion.
- Available in seven standard colors. Custom colors available upon request.
- Custom logos or messages can be embedded.





## Epoxy Flooring System

### Installation

3M™ ESD Epoxy Flooring System 8900 should be applied by a 3M-approved, highly trained applicator.

### Maintenance


3M ESD Epoxy Flooring 8900 is a true “no-wax” system. The cost of cleaning and maintenance over the life of the floor is among the lowest of any type of ESD flooring. (See 3M Epoxy Flooring Maintenance Instructions for complete details.)



| Product No.  | Description                |
|--|----------------------------|
| 8900   | ESD Epoxy Flooring System. |
|  | Standard Colors            |
|  | <b>White</b>               |
|  | <b>Light Gray</b>          |
|  | <b>Medium Gray</b>         |
|  | <b>Dark Gray</b>           |
|  | <b>Light Blue</b>          |
|  | <b>Medium Blue</b>         |
| <b>Medium Green</b>                                      |                            |
| Note: Colors represented on inside back cover of catalog |                            |

### Epoxy Flooring System 8900

| Mechanical   | Test Method      | Typical Value   |
|--|------------------|---|
| Tensile Strength                                     | ASTM D 638       | 2000 PSI (minimum)  |
| Compressive Strength                                 | ASTM C 579       | 6000 PSI (minimum)  |
| Flexural Strength                                    | ASTM D 790       | 2325 PSI  |
| Surface Abrasion (Taber)                             | ASTM D 4060      | <0.20% loss 1000 cycles   |
| Hardness   | ASTM D 2240      | 50-80 Shore D   |
| Indentation @ 2000 lbs.                              |                  | None  |
| Coefficient of Friction                              | Slip Coefficient | 0.507   |
| Rate of Burning                                      | ASTM D 635       | Self-extinguishing  |
| Linear Thermal Expansion                             | ASTM E 831       | No expansion noted  |
| Water Absorption                                     | ASTM C 413       | 0.03%   |
| Elongation   |                  | (70) 3.5%   |
| Electrical   |                  |   |
| Electrical resistance (Surface-to-ground, ESD S.7.1) |                  | Can be formulated to either the conductive ( $2.5 \times 10^4$ to $1 \times 10^6$ ohms) or static-dissipative ( $1 \times 10^6$ to $1 \times 10^9$ ohms) range. |



# Permanent Flooring Products

## Test Your ESD Flooring

*Only systematic testing of your static-control flooring products can assure that they are providing the protection you paid for. 3M test equipment will be calibrated and certified on request in a 3M laboratory with NIST Traceable equipment specified in MIL-STD 45662A.*



### 3M™ Test Kit 701

All of the surfacing products in this catalog remove static charges by grounding; their effectiveness is determined by the amount of “surface-to-ground” resistance. The 3M Test Kit 701 meets all the requirements defined in ESD Association Standards S4.1/S7.1 and MIL-PRF-87893 for surface testing methods and equipment. It contains all of the components and instructions needed to properly test the charge-draining capability of any static-control surface, including mats, laminate, tile, epoxy floors, and waxes. The Test Kit 701 comes with all of its components nested in a

foam-lined, molded plastic carrying case, and is designed to be very “user friendly.” The small, lightweight meter is easy to use, with its scales both color-coded and numbered. The meter also includes separate scales for surface resistance measurements, battery testing and continuity testing. The five-pound test weights are covered in a black, anti-static jackets and are fitted with easy-to-grasp handles and conductive silicone-rubber contact pads. The two test leads are insulated with silicone rubber, making them virtually tangle-free in spite of their generous 10-foot length. The right-angle banana plugs at the meter end are designed to seat close to the meter face; at the weight end, the plugs are covered by retractable sheaths for added safety. Use the Test Kit 701 to verify that your 3M static-control surfacing products perform within the resistance values allowable. Your local 3M sales representative is always available to assist you with static-control testing.

The 3M Test Kit 701 includes:




- One Megohmmeter 701
- Two five-pound test weights
- Two 10-foot test leads
- One insulated bulldog clip
- One non-insulated alligator clip
- Two batteries
- One continuity test plate
- Operators manual
- Molded carrying case

For additional information, refer to pages 27, 50, 52.

# Tapes

# 6

*To aid in the various processes typical of the electronics industry, 3M has assembled a wide selection of tapes including antistatic utility tapes for use in static sensitive areas, tapes designed for wave soldering applications, foil shielding tapes and other related tapes and accessories.*





## Antistatic Tape

3M™ Antistatic Utility Tape 40 combines 3M's remarkable antistatic adhesive with a clear, one mil polyester film backing, and is perfect for use in static-sensitive areas. In fact, an optional special pattern of ESD symbols alerts users that this is the only tape that should be used in static-safe areas.

At the heart of all 3M antistatic tapes is a unique, conductive polymer adhesive that suppresses static, both during unwind from the roll and during removal from a surface. In fact, they generate less than 50 volts on unwind from the roll or removal from a stainless steel surface, even in extremely dry conditions of 10% relative humidity.

Use Antistatic Utility Tape 40 as a third hand to hold work orders, notes, documentation or instructions in place, to seal static shielding bags and boxes containing electronic components, or to bundle DIP tubes and JEDEC shipping trays. It can also be used to hold down obstructions such as wires or attachments during manufacturing.



Antistatic Utility Tape 40PR

| Product No.                                    | Description   |
|--|---|
| 40/40PR*                                       | 3 in. Antistatic Plastic Cores<br>Antistatic Utility Tape.* |
|  | <b>Widths, in. (mm)</b> <b>Length, yd. (m)</b>              |
|  | 0.25 (6,3)      72 (66)                                     |
|  | 0.375 (9,5)      72 (66)                                    |
|  | 0.50 (12,7)      72 (66)                                    |
|  | 0.625 (15,8)      72 (66)                                   |
|  | 0.75 (19,0)      72 (66)                                    |
|  | 0.875 (22,2)      72 (66)                                   |
|  | 1 (25,3)      72 (66)                                       |
|  | 1 in. Antistatic Plastic Cores                              |
| <b>Widths, in. (mm)</b> <b>Length, yd. (m)</b> |   |
| .50 (12,6)      36 (33)                        |   |
| .75 (19,0)      36 (33)                        |   |

Specify at time of order.  
Custom widths available upon request.

\*PR designation means printed

### Antistatic Utility Tape 40 and 40PR Tape Properties

| Property                                       | Test Method | Typical Value          |
|--|-------------|------------------------|
| Static Charge Generation                       |             |                        |
| Removal from Roll,<br>10% RH, volts            | 3M          | 20                     |
| Removal from Roll,<br>50% RH, volts            | 3M          | 5                      |
| Removal from Stainless<br>Steel, 10% RH, volts | 3M          | 20                     |
| Removal from Stainless<br>Steel, 50% RH, volts | 3M          | 5                      |
| Surface Resistance                             |             |                        |
| Adhesive @ 50% RH                              | ESD S11.11  | $5 \times 10^6 \Omega$ |
| Adhesive @ 10% RH                              | ESD S11.11  | $5 \times 10^8 \Omega$ |
| Tape Properties                                |             |                        |
| Adhesion to Steel                              | ASTM D1000  | 19 oz/in.              |
| Unwind Force from Roll                         | ASTM D1000  | 24 oz/in.              |
| Thickness                                      | ASTM D1000  | 2.2 mils               |
| Break Strength                                 | ASTM D1000  | 20 lb/in.              |
| Slit Width                                     | ASTM D1000  | $\pm 1/64$ in.         |
| Rolling Ball Tack                              | ASTM D1000  | 70 mm                  |
| Outgassing                                     |             |                        |
| TML  | ASTM E595   | <1.0%                  |
| CVCM   | ASTM E595   | <0.1%                  |



## Antistatic Tape

3M™ Antistatic High Temperature Masking Tape 42 is perfect for protecting gold leads and other components on boards with sensitive integrated circuits. It withstands the high temperatures of wave soldering, and leaves virtually no residue, which can help reduce the after soldering cleaning process.

To give the convenience of a wave solder masking tape without the fear of static damage, 3M has combined a special antistatic adhesive with a high-temperature polyimide backing that withstands temperatures up to 500°F (260°C).



Antistatic Utility Tape 42

| Product No. | Description   |                        |
|-------------|---|------------------------|
| 42          | 3 in. Antistatic Plastic Core<br>Antistatic High Temperature Mask Tape. |                        |
|             | <b>Widths, in. (mm)</b>   | <b>Length, yd. (m)</b> |
|             | 0.25 (6,3)  | 36 (33)                |
|             | 0.375 (9,53)  | 36 (33)                |
|             | 0.50 (12,6)   | 36 (33)                |
|             | 0.75 (19,0)   | 36 (33)                |
|             | 0.875 (22,2)  | 36 (33)                |
|             | 1 (25,3)  | 36 (33)                |

Custom widths available upon request.

### Antistatic Utility Tape 42 Properties

| Properties                                       | Test Method          | Typical Value                                     |
|--|----------------------|---|
| Static Charge Generation (12 in./sec.) Volts     |                      |   |
| Removal from Core, 10% RH                        | 3M                   | 20  |
| Removal from Core, 50% RH                        | 3M                   | 5   |
| Residual charge on substrate (12 in./sec.) Volts |                      |   |
| Removal from Stainless Steel, 10% RH, volts      | 3M                   | 50  |
| Removal from Stainless Steel, 50% RH, volts      | 3M                   | 5   |
| Surface Resistance<br>Tape @ 10% RH              | ESD Assoc.<br>50% RH | <1 x 10 <sup>11</sup> Ω<br><1 x 10 <sup>9</sup> Ω |
| Tape Properties                                  |                      |   |
| Application Temperature Range                    |                      | >40°F (5°C)                                       |
| Upper range Dwell Time, 5 sec.                   |                      | <500°F (260°C)                                    |
| Unwind Force from Core                           | ASTM D1000           | 30 oz./in.  |
| Thickness  | ASTM D1000           | 2.2 mils  |
| Break Strength                                   | ASTM D1000           | 28 lb./in.  |
| Slit Width Tolerance                             | ASTM D1000           | ± 1/64 in.  |
| Outgassing                                       |                      |   |
| TML  | ASTM E595            | <1.6%   |
| CVCM   | ASTM E595            | <0.1%   |
| Chemical Properties                              |                      |   |
| Contact Corrosivity, FTMS 101C, Method 3005      |                      |   |
| Copper   |                      | Pass  |
| Aluminum   |                      | Pass  |
| Stainless Steel                                  |                      | Pass  |
| Silver   |                      | Pass  |
| Tin Lead   |                      | Pass  |
| Kovar  |                      | Pass  |



## Antistatic Utility Tape Dispenser

The 3M™ Tape Dispenser 620 is designed for use in ESD protected areas. The dispenser is made of conductive and static-dissipative materials which will minimize or eliminate problems associated with conventional dispensers.



Antistatic Tape Dispenser 620

### Tape Dispenser 620 Properties

| Property          | Typical Value   |
|-------------------|---|
| Body              | Stainless steel frame<br>Accepts tape roll up to 2 in. wide.<br>Accepts tape on either 3 in. or 1 in. core.<br>Unit is shipped with 3 in. dissipative drum. |
| Blade             | Stainless Steel Replacement blade   |
| Base              | Cast iron<br>Dimensions 5 x 9 in. (13 cm x 23 cm)<br>Weight 7.5 lbs. (3,4 kg)   |
| Accessories       | 1 in. drum  |
| Decay Time        | From 1000V to < 100V<br>less than 2 seconds (3 in. core)  |
| Recommended Tapes | Antistatic Film Tape 40<br>Antistatic Masking Tape 42<br>Low Static Polyimide Film Tape 5419  |

| Product No. | Description   |
|-------------|---|
| 620         | Tape Dispenser<br>Drum for Manual Dispenser, 1"<br>Manual Dispenser with base<br>Manual Dispenser without base<br>Replacement Blade |

## Silicone Adhesive Tapes

The 3M™ Polyimide Film Tape 5413 consists of a Kapton® polyimide film and silicon adhesive. It is designed for high temperature applications. Temperature use range is -100° to 500°F (-73°C to 260°C).

3M™ Low Static Polyimide Film Tape 5419 is a translucent, polyimide film-backed silicone adhesive tape with unique and extremely low electrostatic discharge properties. Use the 3M Tape 5419 to mask printed circuit boards during the wave solder or solder dip process.

| Product No.      | Description  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
|------------------|--|------------------|-----------------|------------|---------|-------------|---------|------------|---------|------------|---------|-------------|---------|---------|---------|
| 5413             | Polyimide Film Tape. Silicone Adhesive.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr> <td>0.50 (1,2)</td> <td>36 (33)</td> </tr> <tr> <td>0.75 (1,9)</td> <td>36 (33)</td> </tr> <tr> <td>1 (2,5)</td> <td>36 (33)</td> </tr> <tr> <td>2 (5,1)</td> <td>36 (33)</td> </tr> </tbody> </table>   | Widths, in. (cm) | Length, yd. (m) | 0.50 (1,2) | 36 (33) | 0.75 (1,9)  | 36 (33) | 1 (2,5)    | 36 (33) | 2 (5,1)    | 36 (33) |             |         |         |         |
| Widths, in. (cm) | Length, yd. (m)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.50 (1,2)       | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.75 (1,9)       | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 1 (2,5)          | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 2 (5,1)          | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 5419             | Low Static Polyimide Film Tape. Silicone Adhesive.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr> <td>0.25 (0,6)</td> <td>36 (33)</td> </tr> <tr> <td>0.375 (0,9)</td> <td>36 (33)</td> </tr> <tr> <td>0.50 (1,3)</td> <td>36 (33)</td> </tr> <tr> <td>0.75 (1,9)</td> <td>36 (33)</td> </tr> <tr> <td>0.875 (2,2)</td> <td>36 (33)</td> </tr> <tr> <td>1 (2,5)</td> <td>36 (33)</td> </tr> </tbody> </table> | Widths, in. (cm) | Length, yd. (m) | 0.25 (0,6) | 36 (33) | 0.375 (0,9) | 36 (33) | 0.50 (1,3) | 36 (33) | 0.75 (1,9) | 36 (33) | 0.875 (2,2) | 36 (33) | 1 (2,5) | 36 (33) |
| Widths, in. (cm) | Length, yd. (m)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.25 (0,6)       | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.375 (0,9)      | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.50 (1,3)       | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.75 (1,9)       | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 0.875 (2,2)      | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |
| 1 (2,5)          | 36 (33)  |                  |                 |            |         |             |         |            |         |            |         |             |         |         |         |





## Water Soluble Tape

3M™ Water Soluble Wave Solder Tape 5414 has a poly-vinyl alcohol backing which is water soluble, and a synthetic water soluble adhesive. This tape is designed to mask gold fingers on printed circuit boards during wave soldering.

| Product No. | Description                     |       |                 |      |
|-------------|---------------------------------|-------|-----------------|------|
| 5414        | Water Soluble Wave Solder Tape. |       |                 |      |
|             | Widths, in. (cm)                |       | Length, yd. (m) |      |
|             | 0.50                            | (1,3) | 36              | (33) |
|             | 0.75                            | (1,9) | 36              | (33) |
|             | 1                               | (2,5) | 36              | (33) |

Die-Cut Circles are also available. Circles are 0.50 inches in diameter. 1000/roll.

## Vinyl Tape

3M™ Vinyl Tape 471 is a conformable colored (nine colors plus transparent) vinyl backing with a rubber adhesive ideal for many lane and safety markings, color coding, abrasion protection, masking, sealing, splicing and other general purpose applications. The tape's pigmented backings maintain their vivid colors even when exposed to heavy abrasion. Sharper colors for color coding or marking systems draw attention and help enhance plant safety. Dead stretch properties provide straighter lines when masking, marking and sealing.

| Product No.            | Description              |                 |                 |      |
|------------------------|--------------------------|-----------------|-----------------|------|
| 471                    | Plastic Film Tape, Black |                 |                 |      |
|                        | Widths, in. (cm)         |                 | Length, yd. (m) |      |
|                        | 0.50                     | (1,2)           | 36              | (33) |
|                        | 0.75                     | (1,9)           | 36              | (33) |
|                        | 1                        | (2,5)           | 36              | (33) |
|                        | 1.5                      | (3,8)           | 36              | (33) |
|                        | 2                        | (5,0)           | 36              | (33) |
|                        | 3                        | (7,6)           | 36              | (33) |
|                        | 4                        | (10,1)          | 36              | (33) |
|                        | Plastic Film Tape, Blue  |                 |                 |      |
|                        | Widths, in. (cm)         |                 | Length, yd. (m) |      |
|                        | 0.25                     | (6,3)           | 36              | (33) |
|                        | 0.50                     | (1,2)           | 36              | (33) |
|                        | 0.75                     | (1,9)           | 36              | (33) |
|                        | 1                        | (2,5)           | 36              | (33) |
| 1.5                    | (3,8)                    | 36              | (33)            |      |
| 2                      | (5,0)                    | 36              | (33)            |      |
| 3                      | (7,6)                    | 36              | (33)            |      |
| Plastic Film Tape, Red |                          |                 |                 |      |
| Widths, in. (cm)       |                          | Length, yd. (m) |                 |      |
| 0.25                   | (6,3)                    | 36              | (33)            |      |
| 0.375                  | (6,3)                    | 36              | (33)            |      |
| 0.50                   | (1,2)                    | 36              | (33)            |      |
| 0.75                   | (1,9)                    | 36              | (33)            |      |
| 1                      | (2,5)                    | 36              | (33)            |      |
| 1.5                    | (3,8)                    | 36              | (33)            |      |
| 2                      | (5,0)                    | 36              | (33)            |      |
| 3                      | (7,6)                    | 36              | (33)            |      |
| 4                      | (10,1)                   | 36              | (33)            |      |



# Tapes

## EMI Shielding Tapes

3M™ EMI Shielding Tapes are designed for applications requiring reliable point-to-point electrical contact, particularly EMI shielding, grounding and static charge draining. The tapes have a multitude of uses in electronic design and test laboratories for prototyping, design and troubleshooting.



Foil Shielding Tape Engineering Kit

The Engineering Kit enables engineers who need only a few inches of a particular tape for specifying, prototyping, troubleshooting, testing and repairing to avoid the problems and expense associated with meeting minimum order quantities. The kit also eliminates the problem of rolls of tape lost between multiple users or kept loose in desk drawers.

The compact dispenser box also serves as a desktop reference for the tapes. The box panels provide basic technical information about each tape, including product number, backing and adhesive type and thickness, adhesion, resistance and shielding effectiveness.

### Engineering Kit for Foil Shielding Tapes

**Engineering Kit:** Kit includes one roll of each foil tape, 3/4 in. x 4 yds. (1,9 cm x 8,3 m)

Dispenser box is 4 in. x 4 in. x 8.5 in. (10,0 cm x 10,0 cm x 21,3 cm)

| Product No.      | Description  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
|------------------|--|------------------|-----------------|---------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|------------|-----------|
| <b>1170</b>      | Smooth aluminum foil, conductive acrylic adhesive, 3.2 mil total, supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.875 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table> | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.875 (1,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3) | 18 (16.5) |
| Widths, in. (cm) | Length, yd. (m)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.875 (1,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1181</b>      | Smooth copper foil, conductive acrylic adhesive, 2.6 mil total, supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.875 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table>   | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.875 (1,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3) | 18 (16.5) |
| Widths, in. (cm) | Length, yd. (m)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.875 (1,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1182</b>      | Smooth copper foil coated on both sides, conductive acrylic adhesive, 3.5 mil total, supplied with liner on each side.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table>               | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3)  | 18 (16.5) |            |           |
| Widths, in. (cm) | Length, yd. (m)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)  |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |

| Product No.      | Description   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
|------------------|---|------------------|-----------------|---------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|------------|-----------|
| <b>1183</b>      | Smooth tin-plated copper foil, conductive acrylic adhesive, 2.6 mil total, supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table>   | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3)  | 18 (16.5) |            |           |
| Widths, in. (cm) | Length, yd. (m)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1190</b>      | Copper-plated, polyester ripstop fabric, conductive acrylic adhesive, 5.5 mil total, supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.875 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table>                         | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.875 (1,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3) | 18 (16.5) |
| Widths, in. (cm) | Length, yd. (m)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.875 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1194</b>      | Smooth copper foil, nonconductive acrylic adhesive, 3.0 mil total, supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>36 (33)</td></tr> <tr><td>0.75 (1,9)</td><td>36 (33)</td></tr> <tr><td>0.50 (1,2)</td><td>36 (33)</td></tr> <tr><td>0.375 (9,5)</td><td>36 (33)</td></tr> <tr><td>0.25 (6,3)</td><td>36 (33)</td></tr> </tbody> </table>   | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 36 (33)   | 0.75 (1,9)  | 36 (33)   | 0.50 (1,2)  | 36 (33)   | 0.375 (9,5) | 36 (33)   | 0.25 (6,3)  | 36 (33)   |             |           |            |           |
| Widths, in. (cm) | Length, yd. (m)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 36 (33)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 36 (33)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 36 (33)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 36 (33)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 36 (33)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1245</b>      | Embossed copper foil, nonconductive acrylic adhesive, 4.0 mil total, conductivity "through the adhesive," supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.875 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table>    | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.875 (1,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3) | 18 (16.5) |
| Widths, in. (cm) | Length, yd. (m)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.875 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1267</b>      | Embossed aluminum foil, nonconductive acrylic adhesive, 5.0 mil. total, conductivity "through the adhesive," supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.875 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table> | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.875 (1,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3) | 18 (16.5) |
| Widths, in. (cm) | Length, yd. (m)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.875 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| <b>1345</b>      | Embossed tin-plated copper foil, nonconductive acrylic adhesive, 4.0 mil. total, conductivity "through the adhesive," supplied on liner.<br><br><table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr><td>1 (2,5)</td><td>18 (16.5)</td></tr> <tr><td>0.75 (1,9)</td><td>18 (16.5)</td></tr> <tr><td>0.625 (1,5)</td><td>18 (16.5)</td></tr> <tr><td>0.50 (1,2)</td><td>18 (16.5)</td></tr> <tr><td>0.375 (9,5)</td><td>18 (16.5)</td></tr> <tr><td>0.25 (6,3)</td><td>18 (16.5)</td></tr> </tbody> </table>  | Widths, in. (cm) | Length, yd. (m) | 1 (2,5) | 18 (16.5) | 0.75 (1,9)  | 18 (16.5) | 0.625 (1,5) | 18 (16.5) | 0.50 (1,2)  | 18 (16.5) | 0.375 (9,5) | 18 (16.5) | 0.25 (6,3)  | 18 (16.5) |            |           |
| Widths, in. (cm) | Length, yd. (m)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 1 (2,5)          | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.75 (1,9)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.625 (1,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.50 (1,2)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.375 (9,5)      | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |
| 0.25 (6,3)       | 18 (16.5)   |                  |                 |         |           |             |           |             |           |             |           |             |           |             |           |            |           |

All tapes are furnished on 3 in. (7,6 cm) I.D. cores. Minimum width is 1/4 in. (0,6 cm). Maximum width is 23 in. (58 cm).

## Static Control Measures for Handling Electronic Parts


### Why should I care about Electrostatic Discharge?

Electrostatic discharge (ESD) costs the electronics industry millions of dollars annually in damaged and degraded parts. A study in Semiconductor Reliability News estimated that approximately 60% of device failures are EOS/ESD caused.

### What Is ESD?

The contact and separation of materials creates a static charge. An example of a common electrostatic event occurs when a charged individual discharges to a doorknob. The contact and separation of feet when walking across a floor creates a charge on the individual. The discharge to the doorknob is an example of an electrostatic discharge. The simple act of walking across a floor can generate 15,000 volts of static electricity.

**Cost of ESD damage increases by ten (10) fold at every incremental level.**

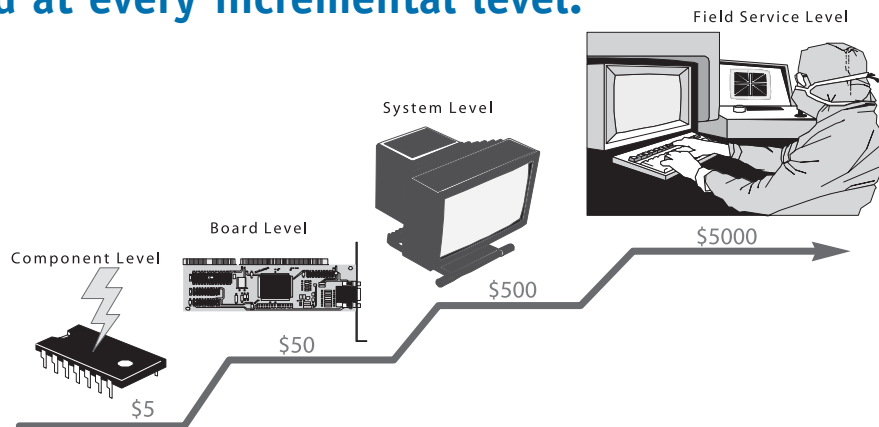

### Human Awareness Levels

- We feel the discharge if it is greater than 3,500 volts.
- We hear the discharge if it is greater than 5,000 volts.
- We see the discharge if it is greater than 8,000 volts.
- By comparison, integrated circuits that are used to make electronic circuit boards can be damaged by voltages as low as 100 to 1,000 volts.

### What is Device Sensitivity?

Once a charge is generated, a charge can be induced from one object onto another. This is called charge transfer. The damage is a result of energy shifting from one charged object to another object. Static sensitive devices are subject to damage or degradation from Electrostatic Discharge (ESD). Damage occurs because small traces and materials cannot withstand the amount of energy surge introduced by an electrostatic field or discharge. Damage and degradation can also result from an electrostatic field.

### Typical Electrostatic Voltages

| Event                               | Voltages at Relative Humidity |        |       |
|-------------------------------------|-------------------------------|--------|-------|
|                                     | 10%                           | 40%    | 55%   |
| Walking Across Carpet               | 35,000                        | 15,000 | 7,500 |
| Walking Across Vinyl Floor          | 12,000                        | 5,000  | 3,000 |
| Motions of Individuals Not Grounded | 6,000                         | 800    | 400   |
| Remove Bubble Pack from Package     | 26,000                        | 20,000 | 7,000 |

# Static Control Measures

## Device Sensitivity Threshold Levels

Generally, device sensitivity threshold levels are well below a person's ability to detect.

| <u>Device Type</u> | <u>Threshold Susceptivity (Volts)</u> |
|--------------------|---------------------------------------|
| MOSFET             | 10-100                                |
| VMOS               | 30-1800                               |
| NMOS               | 60-100                                |
| GaAsFET            | 60-2000                               |
| EPROM              | 100+                                  |
| CMOS               | 200-3000                              |
| JFET               | 140-7000                              |
| SAW                | 150-500                               |
| Op-AMP             | 190-2500                              |
| Schottky Diodes    | 300-2500                              |
| Film Resistors     | 300-3000                              |
| Bipolar Resistors  | 300-7000                              |
| ECL                | 500+                                  |
| SCR                | 500-1000                              |
| Schottky TTL       | 500-2500                              |

## Where Do You Need Static Protection?

- Incoming inspection and test
- Stores and storage
- Transfer carts
- Kitting
- Manual and automated insertion
- Wave soldering
- Equipment assembly and test
- Packaging and shipping
- Repair stations

## Ordering Information

For your nearest distributor, to order or to request an MSDS, call:

Static Control Products  
Austin, Texas

Phone: (800) 328-1368  
Fax: (512) 984-5675  
Fax: (800) 858-9136

Static Control Flooring Products (800) 328-1368  
Surface Mount Supplies (800) 666-8273

## International Information

### Alaska

3M Alaska  
11151 Calaska Circle  
Anchorage, Alaska 99515-2900  
Telephone: 907-522-5200  
Fax: 907-522-1645

### Argentina

3M Argentina S.A.C.I.F.I.A.  
Los Arboles 842  
1686 – Hurlingham  
Provincia de Buenos Aires  
Argentina  
Telephone: 011-54-11-4469-8200  
Fax: 011-54-11-4469-8318

### Australia

3M Australia Pty., Ltd.  
950 Pacific Highway  
Pymble, N.S.W. 2073  
Australia  
Telephone: 011-61-2-9498-9333  
Fax: 011-61-9498-9666

### Austria

3M Oesterreich GmbH.  
Brunner Feldstrasse 63  
A-2380 Perchtoldsdorf  
Austria  
Telephone: 011-43-1-86-686-0  
Fax: 011-43-1-86686-242

### Belgium

3M Belgium N.V./S.A.  
Hermeslaan 7  
B-1831 Diegem  
Belgium  
Telephone: 011-32-2-722-5111  
Fax: 011-32-2-720-0225

### Bolivia

3M Bolivia Branch  
Celle Republicuetas 524  
Santa Cruz de la Sierra  
Bolivia  
Telephone: 591-3-331524  
Fax: 591-3-331503

### Brazil

3M do Brasil Ltda.  
Via Anhanguera, km, 110  
13181-900, Sumare, Sao Paulo  
CEP 13181-900  
Brasil  
Telephone: 011-55-19-3838-7000  
Fax: 011-55-19-3838-6606

### Canada

3M Canada Company  
1840 Oxford Street East  
London, Ontario N5V 3R6  
Canada  
Telephone: 519-451-2500  
Fax: 519-452-6262

### Chile

3M Chile, S.A.  
Avda. Santa Isabel 1001  
Providencia  
Santiago, Chile 6641431  
Telephone: 011-56-2-410-3000  
Fax: 56-2-600-300-3636

### China

3M China Ltd.  
General Office  
38/F, Maxdo Centre  
8 Xing Yi Road, Hong Qiao  
Development Zone  
Shanghai 200336  
P.R.C.  
Telephone: 011-86-21-6275-3535  
Fax: 011-86-21-6275-2343

### Colombia

3M Colombia S.A.  
Administration Center  
Apartado Aereo 11091  
Avenida El Dorado No. 78 A 93  
Santafe de Bogota  
Colombia  
Telephone: 011-57-1-416-1655  
Fax: 011-57-1-416-1677

### Costa Rica

3M Costa Rica, S.A.  
Carretera a Heredia,  
de la Estacion de Pesaje  
La Valencia 1 Km.  
Este Carretera a Santa  
Rosa de Santo Domingo  
de Heredia  
San Jose  
Costa Rica  
Telephone: 011-506-277-1000  
Fax: 011-506-260-3838

### Czech Republic

3M Cesko, spol. s.r.o.  
Vyskocilova 1  
140 00 Praha 4,  
Czech Republic  
Telephone: 011-420-2-61-380-111  
Fax: 011-420-2-61-380-110

### Denmark

3M a/s  
Fabriksparken 15  
DK-2600 Glostrup  
Denmark  
Telephone: 011-45-43-48-0100  
Fax: 011-45-43-96-8596

### Dominican Republic

3M Dominicana S.A.  
Ave. Luperon  
Zona Industrial de Herrera  
Santo Domingo  
Dominican Republic  
Telephone: 809-530-6560  
Fax: 809-530-2960

### East (Rotkreuz, Switzerland)

3M (East) AG  
Industriestrasse 21  
CH-6343 Rotkreuz  
Switzerland  
Telephone: 011-41-41-799-31-00  
Fax: 011-41-41-799-31-90

### Ecuador

3M Ecuador CA  
K. 1.5 Via Duran Tambo  
Guayaquil  
Ecuador  
Telephone: 011-593-2-800-777  
Fax: 011-593-2-2504-406

### Egypt

3M Egypt Trading Ltd.  
Sofitel Towers 19th Floor  
Corniche el-Nil St.  
Maadi, Cairo  
Egypt  
Telephone: 011-202-525-9007  
Fax: 011-202-525-9004

### El Salvador

3M El Salvador, S.A. de C.V.  
Calle Chaparrastique No. 11  
Urbanizacion Industrial Santa  
Elena  
Antiguo Cuscatlan, La Libertad  
El Salvador  
Telephone: 011-5-3-210-0888  
Fax: 011-503-278-3313

### Finland

Suomen 3M Oy  
PL90, Lars Sonckin kaari  
02600 Espoo  
Finland  
Telephone: + 358-9-52-52-584  
Fax: + 358-9-52-52-279

### France

Head Office 3M France  
Boulevard de L'Oise  
95006 Cergy Pontoise Cedex  
France  
Telephone: 011-33-1-30-31-68-41  
Fax: 011-33-1-30-31-68-54

### Germany

3M Deutschland GmbH  
Carl-Schurz-Strasse 1  
D-41453 Neuss  
Germany  
Telephone: 011-49-2131-143165  
Fax: 011-49-2131-142065

### Greece

3M Hellas Ltd.  
Kifissias 20, 151 25 Maroussi  
Athens  
Greece  
Telephone: 011-3210-688-5300  
Fax: 011-3210-684-3281

### Guam

3M Company  
Building 14  
171 Guerrero Drive  
Tamuning, Guam 96911  
Telephone: 011-671-646-9161  
Fax: 011-671-646-7114

### Guatemala

3M Guatemala, S.A.  
Km. 13 Calzada Roosevelt 12-33,  
Z.3 Mixco  
Guatemala City  
Guatemala  
Telephone: 011-502-431-1236  
Fax: 011-502-433-4177

### Hawaii

3M Hawaii  
4443 Malaai Street  
Honolulu, Hawaii 96818  
Telephone: 808-422-2721  
Fax: 808-422-9557

## Honduras

3M Guatemala S.A.  
(Honduras Branch)  
3A, Avenida 19 Calle N.O.  
Apartado Postal 1544  
San Pedro Sula  
Honduras  
Telephone: 011-504-52-8176  
Fax: 011-504-57-6111

## Hong Kong

3M Hong Kong Ltd.  
5th Floor, Victoria Centre  
15 Watson Road  
Hong Kong  
Telephone: 011-852-2806-6111  
Fax: 011-852-2807-1308

## Hungary

3M Hungaria Kft  
Vaci ut 178  
H-1138 Budapest  
Hungary  
Telephone: 011-36-1-270-7777  
Fax: 011-36-1-320-0951

## India

3M Ltd. Bangalore  
Raheja Paramount  
138 Residency Road,  
Bangalore 560 025  
India  
Telephone: 011-91-80-223-1414  
Fax: 011-91-80-233-1450

## Indonesia

PT 3M Indonesia  
Plaza DM, 5th Floor  
Jl. Jenderal Sudirman Kav 25  
Jakarta 12920  
Indonesia  
Telephone: 011-62-21-5203401  
Fax: 011-62-5203106

## Ireland

3M Ireland  
3M House  
Adelphi Centre, Upper Georges St.  
Dun Laoghaire  
Co. Dublin  
Ireland  
Telephone: 011-353-1-280-3555  
Fax: 011-353-1-280-3509

## Israel

3M Israel Ltd.  
91 Medinat Hayehudim Street  
First Floor  
Herzliya City 46120  
Israel  
Telephone: 972-9-615000  
Fax: 972-9-615050

## Italy

3M Italia S.p.A.  
Via San Bovio 3 - S. Felice  
20090 Segrate  
Milano  
Italy  
Telephone: 011-39-02-7035 3184  
Fax: 011-39-02-7035 2126

## Jamaica

3M Interamerica, Inc.  
(Jamaica Division)  
218 Marcus Garvey Drive  
Kingston 11  
Jamaica  
Telephone: 876-937-3859  
Fax: 876-937-4369

## Japan

33-1 Tamagawadai 2-chome  
Setagaya-ku, Tokyo  
158-8583 Japan  
Telephone: 011-81-3-3709-8111  
Fax: 011-81-3-5716-7492

## Kenya

3M Kenya Ltd.  
Alpha Center  
off Mombasa Road  
Nairobi  
Kenya  
Telephone: 011-254-2-351621  
Fax: 011-254-2-825199

## Korea

3M Korea Ltd.  
22nd/FI Daehan Investment Trust  
Blvd.  
27-3 Yoido-dong  
Yongdungpo-ku  
Seoul 150-010  
Korea  
Telephone: 011-82-2-3771-4114  
Fax: 011-82-2-785-7472

## Malaysia

3M Malaysia Sdn. Berhad  
Bangunan 3M,  
No. 6, Persiaran Tropicana,  
47410 Petaling Jaya,  
Selangor  
Malaysia  
Telephone: 011-60-3-706-2888  
Fax: 011-60-3-706-2902

## Mexico

3M Mexico S.A. de C.V.  
Avenida Santa Fe 55  
Col. Santa Fe 01210  
Mexico, D.F. 01210  
Telephone: 011-52-55-5270-0400  
Fax: 011-52-55-5270-2299

## Morocco

3M Maroc  
Residence les Alizes  
la Colline II, Lot. N33  
RdC, Sidi Maarouf  
Morocco  
Telephone: 011-212-2-977-977  
Fax: 011-212-2-33-57-84

## Netherlands

3M Nederland B.V.  
Industrieweg 24  
2382 NW Zoeterwoude  
Netherlands - Europe  
Telephone: 011-31-71-5-450-450  
Fax: 011-31-71-5-450-212

## New Zealand

3M New Zealand Ltd.  
250 Archers Road  
Glenfield, Auckland 10  
New Zealand  
Telephone: 011-64-9-444-4760  
Fax: 011-64-9-444-2773

## Nicaragua

3M Nicaragua  
Km. 5 Carretera Norte  
Managua, Nicaragua  
Nicaragua  
P.O. Box A-119  
Managua, Nicaragua, C.A.  
Telephone: 011-505-248-6502  
Fax: 011-505-248-6504

## Norway

3M Norge A/S  
Hvamveien 6  
Postboks 100, N-2026 Skjetten  
Norway  
Telephone: 011-47-63-84-75-00  
Fax: 011-47-63-84-17-88

## Pakistan

3M Pakistan (PVT) Ltd.  
Islamic Chamber of Commerce  
Bldg  
ST-2/A, Block 9  
KDA Scheme 5  
Clifton - Karachi  
75600  
Pakistan  
Telephone: 011-92-21-111-2255-36  
Fax: 011-92-21-587-7865

## Panama

3M Panama S.A.  
Via Ricardo J. Alfaro  
Villa de las Fuentes  
Panama  
Telephone: 011-507-236-5222  
Fax: 011-507-236-6255

## Paraguay

3M Sucursal Paraguay S.A.  
Cap. Motta 297 Esq. Guido Spano  
Asuncion  
Paraguay  
Cap. Motta 297 Esq. Guido Spano  
Asuncion  
Paraguay  
Telephone: 011-595-21-612-076  
Fax: 011-595-21-607-245

## Peru

3M Peru, S.A.  
Av. Canaval y Moreyra 641  
San Isidro, Lima 27  
Peru  
Telephone: 011-51-1-224-2728  
Fax: 011-51-1-224-3171

## Philippines

3M Philippines, Inc.  
PCI Bank Tower 2-18th Floor  
Makati Avenue  
Makati City 1200  
Philippines  
Telephone: 011-63-2-813-3781  
Fax: 011-63-2-814-5872

## Poland

3M Poland Sp. z.o.o.  
al. Katowicka 117,  
Kajetany K. Warszaway  
05-830 Nadarzyn  
Poland  
Telephone: 011-48-22-739-60-00  
Fax: 011-48-22-739-60-01

## Portugal

Minnesota (3M) de Portugal, Lda  
Rua do Conde de Redondo 98  
P 1169 Lisbon Codex  
Portugal  
Telephone: 011-351-2-131-34-500  
Fax: 011-351-2-131-34-860

## Puerto Rico

3M Puerto Rico, Inc.  
350 Chardon Ave., Suite 1010  
San Juan, PR 00918  
Puerto Rico  
Telephone: 787-620-3000  
Fax: 787-620-3018

## Romania

3M Romania, S.R.L.  
World Trade Center  
Bd. Expozitiei 2, Sector 1  
77334 Bucharest  
Romania  
Telephone: 011-40-1-224-3181  
Fax: 011-40-1-224-3184

## Russia

3M Russia  
CT Meridian  
24/D Smolnaya  
Moscow 125445  
Russia  
Telephone: 7-095-784-74-74  
Fax: 7-095-784-74-75

## Singapore

3M Singapore Pte. Ltd.  
9 Tagore Lane  
Singapore 787472  
Telephone: 011-65-6454-8611  
Fax: 011-65-6552-2113

## South Africa

3M South Africa (Pty.) Ltd.  
Bldg 12, The Woodlands  
Woodlands Drive  
South Africa Ltd.  
Telephone: 011-27-11-806-2000  
Fax: 011-27-11-806-2440

## Spain

3M Espana, S.A.  
Juan Ignacio Luca de Tena, 19-25  
Madrid 28027  
Spain  
Telephone: 011-34-91-321-6000  
Fax: 011-35-1-321-6002

## Sri Lanka

3M Lanka (Private) Limited  
754 New Parliament Road  
Pelawatte  
Battaramulla  
Sri Lanka  
Telephone: 011-941-785701  
Fax: 011-940-410084

**Sweden**

3M Svenska AB  
Bollstanäsvägen 3  
S-191 89 Sollentuna  
Sweden  
Telephone: 011-46-8-92-2100  
Fax: 011-46-8-92-2212

**Switzerland**

3M (Schweiz) AG  
Eggstrasse 93  
CH-8803 Rüschlikon  
Switzerland  
Telephone: 011-41-1-724-9352  
Fax: 011-41-1-724-9336

**Taiwan**

3M Taiwan Ltd.  
Lotus Bldg 136., 13th Floor  
Section 3, Jen Ai Rd.  
Taipei, 10628 Taiwan  
Telephone: 011-886-2-2704-9011  
Fax: 011-886-2-2706-0383

**Thailand**

3M Thailand Ltd.  
12th Floor, Sermit Tower  
159 Asoke Road (Sukhumvit 21)  
Bangkok 10110  
Thailand  
Telephone: 011-662-260-8577  
Fax: 011-662-261-7535

**Trinidad**

3M Interamerica, Inc.  
(Trinidad & Tobago Division)  
1 Jerningham Avenue  
Belmont  
Port of Spain, W.I.  
Trinidad  
Telephone: 011-868-623-8917  
Fax: 011-868-623-3079

**Turkey**

3M Sanayii ve Ticaret A.S.  
Akmerkez  
Blok Kat 5  
80600 Etiler  
Istanbul, Turkey  
Telephone: 00 90-212-350-77 77  
Fax: 00 90-212-282-17 43

**United Arab Emirates**

(3M Gulf)  
3M Gulf Ltd.  
4th Floor, Entrance 4  
Hamarain Center  
Deira  
Dubai,  
United Arab Emirates  
Telephone: 971-4-265-2121  
Fax: 971-4-2661-575

**United Kingdom**

3M United Kingdom PLC  
3M House, PO Box 1  
Market Place  
Bracknell, Berkshire RG12 1JU  
England  
United Kingdom  
Telephone: 011-44-1234-229463  
Fax: 011-44-1234-229433

**Uruguay**

3M Uruguay S.A.  
Bvar. Artigas 1247  
Esq. Charrua  
11200 Montevideo  
Uruguay  
Telephone: 011-598-409-3341  
Fax: 011-598-409-3913

**Venezuela**

3M Manufacturera Venezuela S.A.  
Final Avenida Tamanaco  
Centro Empresarial El Rosal,  
Piso 6,  
Chacao Ceraces 1060  
Venezuela  
Telephone: 011-58-2-12-957-8111  
Fax: 011-58-2-12-951-5993

**Vietnam**

3M Vietnam Ltd.  
34 Tran Quoc Thao St.  
District 3  
Ho Chi Minh City  
S.R. Vietnam  
Telephone: 011-84-8-930-2044  
Fax: 011-84-8-930-2043

**Zimbabwe**

3M Zimbabwe (Pvt.) Ltd.  
23 George Drive  
Beverly East, Amby  
Msasa,  
Harare  
Zimbabwe  
Telephone: 011-263-4-486585/6/7  
Fax: 011-263-4-486385

## Product Index

|   |                    |  |                |
|---|--------------------|--|----------------|
| Adjustable Fabric Wrist Straps . . . . .                  | 2                  | Heel Grounding Assembly . . . . .                        | 7              |
| Adjustable Thermoplastic Wrist Straps . . . . .           | 3                  | High Performance Scotch-Brite™ Cloth . . . . .           | 31             |
| Air Ionizer Tester/Field Meter and Charger . . . . .      | 36, 59             | Ionized Air Gun . . . . .                                | 33             |
| Anti-Fatigue Mats . . . . .                               | 22                 | Labels . . . . .   | 47             |
| Antistatic Tape . . . . .                                 | 72, 73             | Low Static Tape . . . . .                                | 74             |
| Antistatic Utility Tape Dispenser . . . . .               | 74                 | Mini Air Ionizer . . . . .                               | 35             |
| Benchtop Air Ionizers . . . . .                           | 34                 | Moisture Vapor Barrier Bag . . . . .                     | 42             |
| Charge Analyzer . . . . .                                 | 50, 53, 54, 63, 64 | Monitor Stand-By Jack . . . . .                          | 15             |
| Clean Walk Mats . . . . .                                 | 24                 | Monitor Verification Kits . . . . .                      | 14             |
| Conductive Bags and Drum Liners . . . . .                 | 44                 | Monitor/Table Mat Replacement Cord . . . . .             | 15             |
| Conductive Film and Tubing . . . . .                      | 43                 | Overhead Air Ionizer . . . . .                           | 32             |
| Conductive Floor Mats . . . . .                           | 20                 | Portable Field Service Kit . . . . .                     | 25, 26         |
| Connector Covers . . . . .                                | 46, 47             | Rubber Adhesive Tapes . . . . .                          | 75             |
| Containers . . . . .                                      | 48                 | Shoes/Wrist Strap Tester . . . . .                       | 56             |
| Cushioned Static Shielding Wrap . . . . .                 | 41                 | Silicone Adhesive Tapes . . . . .                        | 74             |
| Data Logging Software . . . . .                           | 57                 | Single Card Carriers . . . . .                           | 45             |
| Disposable Shoe Grounding Assembly . . . . .              | 6                  | Single Device Carrier . . . . .                          | 45             |
| Disposable Wrist Straps . . . . .                         | 5                  | Static Control Vinyl Floor Tile . . . . .                | 66, 67         |
| Dissipative Hard Laminate Sheets . . . . .                | 21                 | Static Monitor . . . . .                                 | 11, 12         |
| Dissipative Rigid Worksurfaces . . . . .                  | 21                 | Static Sensor . . . . .                                  | 36, 59         |
| Dissipative Rubber Mats and Runners . . . . .             | 19                 | Static Shielding Bags . . . . .                          | 38, 39, 40, 41 |
| Dissipative Vinyl Three-Layer Mats and Runners . . . . .  | 18                 | Telecommunications Field Service Kit . . . . .           | 25             |
| Dual Conductor Fabric Wrist Straps for Monitors . . . . . | 16                 | Test Equipment . . . . .                                 | 50, 51         |
| Dual Conductor Metal Wrist Straps for Monitors . . . . .  | 16                 | Test Kits for Static Control Surfaces/Flooring . . . . . | 27, 52, 70     |
| Dual Conductor Portable Wrist Strap Monitor . . . . .     | 13                 | Toe Grounding Assembly . . . . .                         | 6              |
| Dual Conductor Remote Input Jacks . . . . .               | 15                 | Training . . . . .                                       | 62             |
| Dual Conductor Wrist Bands . . . . .                      | 17                 | Vinyl Tape . . . . .                                     | 75             |
| Dual Conductor Wrist Strap Ground Cords . . . . .         | 18                 | Voltage Wrist Strap Monitor . . . . .                    | 10             |
| EMI Shielding Tapes . . . . .                             | 76                 | Water Soluble Tape . . . . .                             | 75             |
| Epoxy Flooring System . . . . .                           | 68, 69             | Workstation Grounding Kits . . . . .                     | 23             |
| Equipment Ground Monitor . . . . .                        | 9                  | Worksurface Cleaning Products . . . . .                  | 24             |
| ESD Training . . . . .                                    | 62                 | Wrist Strap Ground Cords . . . . .                       | 4              |
| Field Service Kits . . . . .                              | 25                 | Wrist Strap Tester . . . . .                             | 55             |
| Fixed Size Metal Wrist Straps . . . . .                   | 2                  | Wrist Strap and Footwear Tester . . . . .                | 58             |


## Product Numbers

|  |                    |  |            |
|--|--------------------|--|------------|
| 40/40PR Antistatic Tape . . . . .                  | 72                 | 741 Shoe Electrode . . . . .                     | 58         |
| 42 Antistatic Utility Tape . . . . .               | 73                 | 746 Wrist Strap Tester . . . . .                 | 51, 55     |
| 471 Vinyl Tape . . . . .                           | 75                 | 747 Shoes/Wrist Strap Tester . . . . .           | 51, 56     |
| 620 Antistatic Utility Tape Dispenser . . . . .    | 74                 | 747DLS Data Logging Software . . . . .           | 57         |
| 701 Test Kit for Static Control Surfaces . . . . . | 27, 50, 52, 70     | 790 Static Monitor . . . . .                     | 11, 51     |
| 701-L Test Leads . . . . .                         | 27, 52             | 790AC AC Adapter . . . . .                       | 11         |
| 701-M Megohmmeter . . . . .                        | 27, 52             | 790MP Mounting Plate for 790 . . . . .           | 11         |
| 701-W 5 lb. Test Weight . . . . .                  | 27, 52             | 790P Power Supply . . . . .                      | 28         |
| 711 Charge Analyzer . . . . .                      | 50, 53, 54, 63, 64 | 790VK Verification Kit . . . . .                 | 11, 14, 28 |
| 718 Static Sensor . . . . .                        | 36, 50, 59         | 791AC AC Adapter . . . . .                       | 9, 10      |
| 718A Air Ionizer Test Kit . . . . .                | 36, 50, 59         | 791CG Chassis Ground Cord . . . . .              | 9, 10, 28  |
| 723 Accessory Belt Clip . . . . .                  | 13, 28             | 791D10 10x10 Data Output Cord . . . . .          | 10, 28     |
| 724 Continuous Workstation Monitor . . . . .       | 12, 50             | 791D6 6x6 Data Output Cord . . . . .             | 9, 28      |
| 724P Power Supply . . . . .                        | 28                 | 791E Equipment Ground Monitor . . . . .          | 9, 51      |
| 724VK Verification Kit . . . . .                   | 14, 28             | 791EVK Verification Kit . . . . .                | 9, 14, 29  |
| 725 Wrist Strap Monitor . . . . .                  | 13, 51             | 791W Wrist Strap Monitor . . . . .               | 10, 51     |
| 725VK Verification Kit . . . . .                   | 14, 28             | 791WR Wrist Strap Remote . . . . .               | 10         |
| 732 Replacement Remote Input Jack . . . . .        | 15, 28             | 791WVK Verification Kit . . . . .                | 10, 14, 29 |
| 733 Remote Splitter Kit . . . . .                  | 15, 28             | 960 Mini Air Ionizer . . . . .                   | 35         |
| 740 Wrist Strap and Footwear Tester . . . . .      | 51, 58             | 960X/980X Replacement Wall Transformer . . . . . | 33, 35     |
| 740P Power Supply . . . . .                        | 28                 | 963 Benchtop Air Ionizer . . . . .               | 34         |



|   |        |   |                |
|---|--------|---|----------------|
| 963E Benchtop Air Ionizer                             | 34     | 2385VM Dual Conductor Metal Wrist Band              | 16             |
| 980 Ionized Air Gun                                   | 33     | 2386 Dual Conductor Metal Wrist Band                | 16             |
| 980E Ionized Air Gun – European version               | 33     | 2386VM Dual Conductor Metal Wrist Band              | 16             |
| 980E-X Replacement Wall Transformer                   | 33     | 2389 Monitor/Table Mat Interconnect Cord            | 15, 29         |
| 980F Replacement Air Filters                          | 33     | 2390 10' Mat Ground Cord                            | 9, 29          |
| 980T Replacement Nozzle Tip                           | 33     | 3033 Snap Fastener                                  | 29             |
| 990 Overhead Air Ionizer                              | 32     | 3034 Snap Fastener                                  | 29             |
| 990F Overhead Air Ionizer                             | 32     | 3037 Insulated Bulldog Clip                         | 29             |
| 1170 Smooth Aluminum Foil Tape                        | 76     | 3038 Uninsulated Alligator Clip                     | 29             |
| 1181 Smooth Copper Foil Tape                          | 76     | 3040 Ground Cord                                    | 29             |
| 1182 Smooth Copper Foil Tape                          | 76     | 3041 Grounding Kit                                  | 30             |
| 1183 Smooth Tin-Plated Copper Foil Tape               | 76     | 3042 Wrist Strap Grounding System                   | 30             |
| 1190 Copper-Plated Polyester Ripstop Fabric Tape      | 76     | 3043 Interconnect Cord                              | 30             |
| 1194 Smooth Copper Foil Tape                          | 76     | 3047 Common Point Grounding System                  | 30             |
| 1245 Embossed Copper Foil Tape                        | 76     | 3048 Grounding System for Wrist Strap/Table Mat     | 30             |
| 1267 Embossed Aluminum Foil Tape                      | 76     | 3050 Snap Fastener                                  | 30             |
| 1345 Embossed Tin-Plated Copper Foil Tape             | 76     | 3051 Ground Cord                                    | 30             |
| 1704 Conductive Film, 4.0 Mil.                        | 43     | 3057 Stand By Jack                                  | 10, 11, 15, 30 |
| 1706 Conductive Film, 6.0 Mil.                        | 43     | 3370 Moisture Vapor Barrier Bag                     | 42             |
| 1708 Conductive Film, 8.0 Mil.                        | 43     | 4011 Round Container                                | 48             |
| 1724 Lay Flat Conductive Tubing, 4.0 Mil.             | 43     | 4012 Round Container                                | 48             |
| 1764 Conductive Film, 4.0 Mil.                        | 43     | 4013 Round Container                                | 48             |
| 1864 Floor Mat  | 20     | 4014 Round Container                                | 48             |
| 1864R Floor Runner                                    | 20     | 4015 Round Container                                | 48             |
| 1900 Metal-In Static Shielding Bag                    | 38     | 4021 Hinged Container                               | 48             |
| 1910 Metal-In Static Shielding Bag w/Zipper Closure   | 38     | 4022 Hinged Container                               | 48             |
| 1970 Static Shielding Bag                             | 39     | 4023 Hinged Container                               | 48             |
| 1980 Static Shielding Bag with Zipper Closure         | 39     | 4024 Hinged Container                               | 48             |
| 2004 Conductive Conductive Bags                       | 44     | 4025 Hinged Container                               | 48             |
| 2011 Scotch-Brite™ High Performance Cloths            | 31     | 4270 Connector Covers                               | 46, 47         |
| 2014 Conductive Drum Liners                           | 44     | 4610 Ground Cord                                    | 3, 4           |
| 2044 Economy Shoe Grounding Assembly                  | 7      | 4611 Ground Cord                                    | 3, 4           |
| 2045 Disposable Shoe Grounding Straps                 | 6      | 4620 Wrist Band                                     | 3              |
| 2051 Economy Shoe Grounding Assembly                  | 7      | 4650 Wrist Band                                     | 3              |
| 2053 Toe Grounding Assembly                           | 6      | 4720 Dual Conductor Wrist Band                      | 17             |
| 2056 Economy Non-marking Shoe Grounding Assembly      | 7      | 5413 Polyimide Film Tape                            | 74             |
| 2100R Metal-Out Static Shielding Bag                  | 40     | 5414 Water Soluble Wave Solder Tape                 | 75             |
| 2110R Metal-Out Static Shielding Bag w/Zipper Closure | 40     | 5419 Low Static Polyimide Film Tape                 | 74             |
| 2120R Cushioned Static Shielding Bags                 | 41     | 5701 Single Device Carrier                          | 45             |
| 2126R Cushioned Static Shielding Wrap                 | 41     | 5830 Clean Walk Mats                                | 24             |
| 2204 Adjustable Fabric Wrist Band                     | 2      | 7101 Labels   | 47             |
| 2205 Metal Wrist Bands                                | 2      | 7102 Labels   | 47             |
| 2206 Metal Wrist Bands                                | 2      | 7201 Labels   | 47             |
| 2207 Metal Wrist Bands                                | 2      | 7202 Labels   | 47             |
| 2209 Disposable Wrist Strap                           | 5      | 7203 Labels   | 47             |
| 2210 Ground Cord                                      | 4      | 7204 Labels   | 47             |
| 2214 Fabric Wrist Band with Coiled Cord               | 2      | 8001 Cleaner for Static Control Mats                | 24, 30         |
| 2220 Ground Cord                                      | 4      | 8021 Table and Floor Mat                            | 23             |
| 2224 Fabric Wrist Band with Coiled Cord               | 2      | 8023 Table and Floor Mat                            | 23             |
| 2271 Economy Adjustable Fabric Wrist Band             | 2      | 8024 Table and Floor Mat                            | 23             |
| 2272 Economy Adjustable Wrist Band                    | 2      | 8031 3-Layer Table Mat                              | 23             |
| 2360 Dual Conductor Coiled Cord                       | 16, 17 | 8033 3-Layer Table Mat                              | 23             |
| 2368 Dual Conductor Adjustable Fabric Wrist Band      | 16     | 8034 3-Layer Table Mat                              | 23             |
| 2368VM Dual Conductor Adjustable Fabric Wrist Band    | 16     | 8201 Dissipative Vinyl Three Layer Floor Mat, Brown | 18             |
| 2370 Dual Conductor Coiled Cord                       | 16, 17 | 8203 Dissipative Vinyl Three Layer Floor Mat, Gray  | 18             |
| 2371 Dual Conductor Coiled Cord                       | 16, 17 | 8204 Dissipative Vinyl Three Layer Floor Mat, Blue  | 18             |
| 2380 Monitor/Table Mat Replacement Cord               | 15, 29 | 8211 Dissipative Vinyl Three Layer Floor Mat, Brown | 18             |
| 2381 Dual Conductor Metal Wrist Strap                 | 16     | 8213 Dissipative Vinyl Three Layer Floor Mat, Gray  | 18             |
| 2381VM Dual Conductor Metal Wrist Strap               | 16     | 8214 Dissipative Vinyl Three Layer Floor Mat, Blue  | 18             |
| 2382 Dual Conductor Metal Wrist Strap                 | 16     | 8251 Dissipative Vinyl Three Layer Floor Mat, Brown | 18             |
| 2382VM Dual Conductor Metal Wrist Strap               | 16     | 8253 Dissipative Vinyl Three Layer Floor Mat, Gray  | 18             |
| 2383 Dual Conductor Metal Wrist Strap                 | 16     | 8254 Dissipative Vinyl Three Layer Floor Mat, Blue  | 18             |
| 2383VM Dual Conductor Metal Wrist Strap               | 16     | 8261 Dissipative Vinyl Three Layer Floor Mat, Brown | 18             |
| 2384 Dual Conductor Metal Wrist Band                  | 16     | 8263 Dissipative Vinyl Three Layer Floor Mat, Gray  | 18             |
| 2384VM Dual Conductor Metal Wrist Band                | 16     | 8264 Dissipative Vinyl Three Layer Floor Mat, Blue  | 18             |
| 2385 Dual Conductor Metal Wrist Band                  | 16     | 8281 Dissipative Vinyl Three Layer Floor Mat, Brown | 18             |

|  |    |  |        |
|--|----|--|--------|
| 8283 Dissipative Vinyl Three Layer Floor Mat, Gray . . . . | 18 | 8436 Static Control Vinyl Tile, Maroon . . . . .             | 66     |
| 8284 Dissipative Vinyl Three Layer Floor Mat, Blue . . . . | 18 | 8437 Static Control Vinyl Tile, Black . . . . .              | 66     |
| 8291 Dissipative Vinyl Three Layer Floor Mat, Brown . . .  | 18 | 8441 Static Control Vinyl Tile, Reverse Brown . . . . .      | 66     |
| 8293 Dissipative Vinyl Three Layer Floor Mat, Gray . . . . | 18 | 8443 Static Control Vinyl Tile, Reverse Gray . . . . .       | 66     |
| 8294 Dissipative Vinyl Three Layer Floor Mat, Blue . . . . | 18 | 8444 Static Control Vinyl Tile, Reverse Blue . . . . .       | 66     |
| 8343 Static Dissipative Hard Laminate, Beige . . . . .     | 21 | 8445 Static Control Vinyl Tile, Reverse Green . . . . .      | 66     |
| 8344 Static Dissipative Hard Laminate, Gray . . . . .      | 21 | 8447 Static Control Vinyl Tile, Reverse Black . . . . .      | 66     |
| 8353 Static Dissipative Hard Laminate, Beige . . . . .     | 21 | 8501 Static-Dissipative Portable Field Service Kit . . . . . | 25     |
| 8354 Static Dissipative Hard Laminate, Gray . . . . .      | 21 | 8502 Static-Dissipative Field Service Kit . . . . .          | 25     |
| 8360 Static Dissipative Hard Laminate, Beige . . . . .     | 21 | 8505 Lightweight Portable Field Service Kit . . . . .        | 26     |
| 8365 Static Dissipative Hard Laminate, Gray . . . . .      | 21 | 8507 Portable Field Service Kit . . . . .                    | 26     |
| 8375 Static Dissipative Hard Laminate, White . . . . .     | 21 | 8520 Single Card Carrier . . . . .                           | 45     |
| 8403 Conductive Adhesive . . . . .                         | 66 | 8521 Single Card Carrier . . . . .                           | 45     |
| 8405 Calcium Chloride . . . . .                            | 66 | 8522 Single Card Carrier . . . . .                           | 45     |
| 8411 Static Control Vinyl Tile, Brown . . . . .            | 66 | 8523 Single Card Carrier . . . . .                           | 45     |
| 8412 Static Control Vinyl Tile, White . . . . .            | 66 | 8810 Table Mat . . . . .                                     | 19     |
| 8413 Static Control Vinyl Tile, Gray . . . . .             | 66 | 8811 Table Mat . . . . .                                     | 19     |
| 8414 Static Control Vinyl Tile, Blue . . . . .             | 66 | 8830 Table Mat . . . . .                                     | 19     |
| 8415 Static Control Vinyl Tile, Green . . . . .            | 66 | 8831 Table Mat . . . . .                                     | 19     |
| 8416 Static Control Vinyl Tile, Maroon . . . . .           | 66 | 8840 Table Runner . . . . .                                  | 19     |
| 8417 Static Control Vinyl Tile, Black . . . . .            | 66 | 8841 Table Runner . . . . .                                  | 19     |
| 8421 Static Control Vinyl Tile, Reverse Brown . . . . .    | 66 | 8860 Table Runner . . . . .                                  | 19     |
| 8423 Static Control Vinyl Tile, Reverse Gray . . . . .     | 66 | 8861 Table Runner . . . . .                                  | 19     |
| 8424 Static Control Vinyl Tile, Reverse Blue . . . . .     | 66 | 8870 Floor Mat . . . . .                                     | 19     |
| 8425 Static Control Vinyl Tile, Reverse Green . . . . .    | 66 | 8871 Floor Mat . . . . .                                     | 19     |
| 8427 Static Control Vinyl Tile, Reverse Black . . . . .    | 66 | 8880 Floor Runner . . . . .                                  | 19     |
| 8431 Static Control Vinyl Tile, Brown . . . . .            | 66 | 8881 Floor Runner . . . . .                                  | 19     |
| 8432 Static Control Vinyl Tile, White . . . . .            | 66 | 8900 ESD Epoxy Flooring System . . . . .                     | 68, 69 |
| 8433 Static Control Vinyl Tile, Gray . . . . .             | 66 | 9500 Anti-Fatigue Mat . . . . .                              | 22     |
| 8434 Static Control Vinyl Tile, Blue . . . . .             | 66 | 9510 Anti-Fatigue Mat . . . . .                              | 22     |
| 8435 Static Control Vinyl Tile, Green . . . . .            | 66 |  |        |

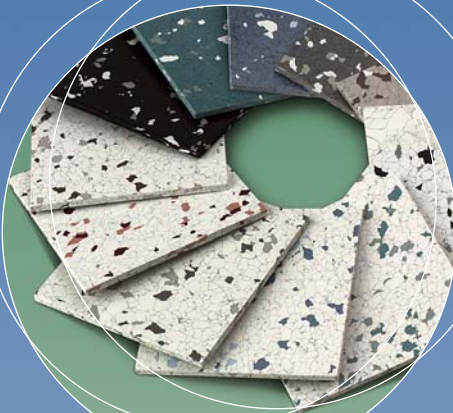

### Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

### Warranty; Limited Remedy; Limited Liability.

3M's product warranty is stated in its Product Literature available upon request. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.



Electronic Solutions Division  
6801 River Place Blvd.  
Austin, TX 78726-9000  
[www.3m.com/esd](http://www.3m.com/esd)



Recycled paper  
40% pre-consumer  
10% post consumer

Printed in USA.

© 3M 2004 98-0799-0768-3 (05410) TG-1