



Static Control Products and Services Catalog

How to Search this Catalog



This digital catalog provides you with four quick ways to find the products and information you're looking for. Just point and click on the bookmarks to the left, the linked images on the next page, the labeled sections of the table of contents or on individual entries in the index. You can also use the "search" function built into Adobe Acrobat to jump directly to any text reference in this document.

Acrobat "Search" function instructions:


1. Press CONTROL + F
 2. When the dialog box appears, type in the word or words you are looking for and press ENTER.
 3. Depending on your version of Acrobat, it will either take you directly to the first instance found, or display a list of pages where the text can be found. In the latter, click on the link to the pages provided.
-



Static Control Products and Services Catalog

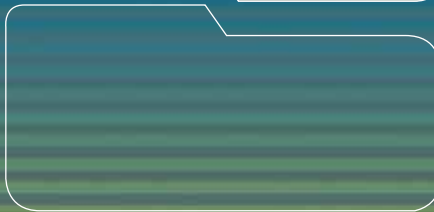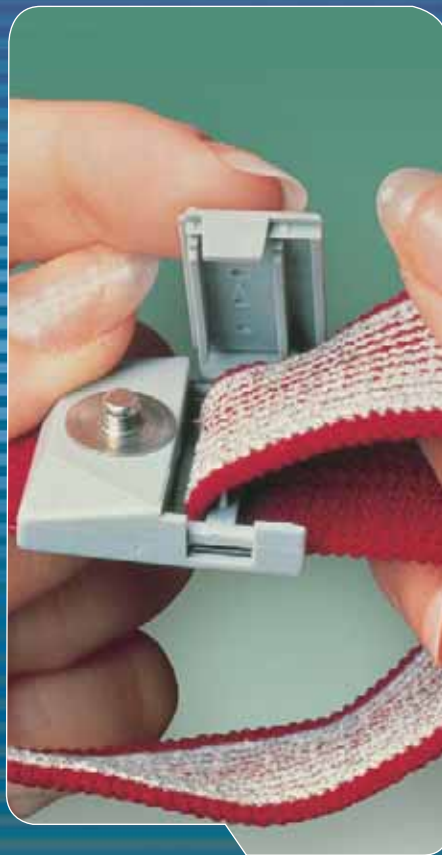

Take Control
of Static.

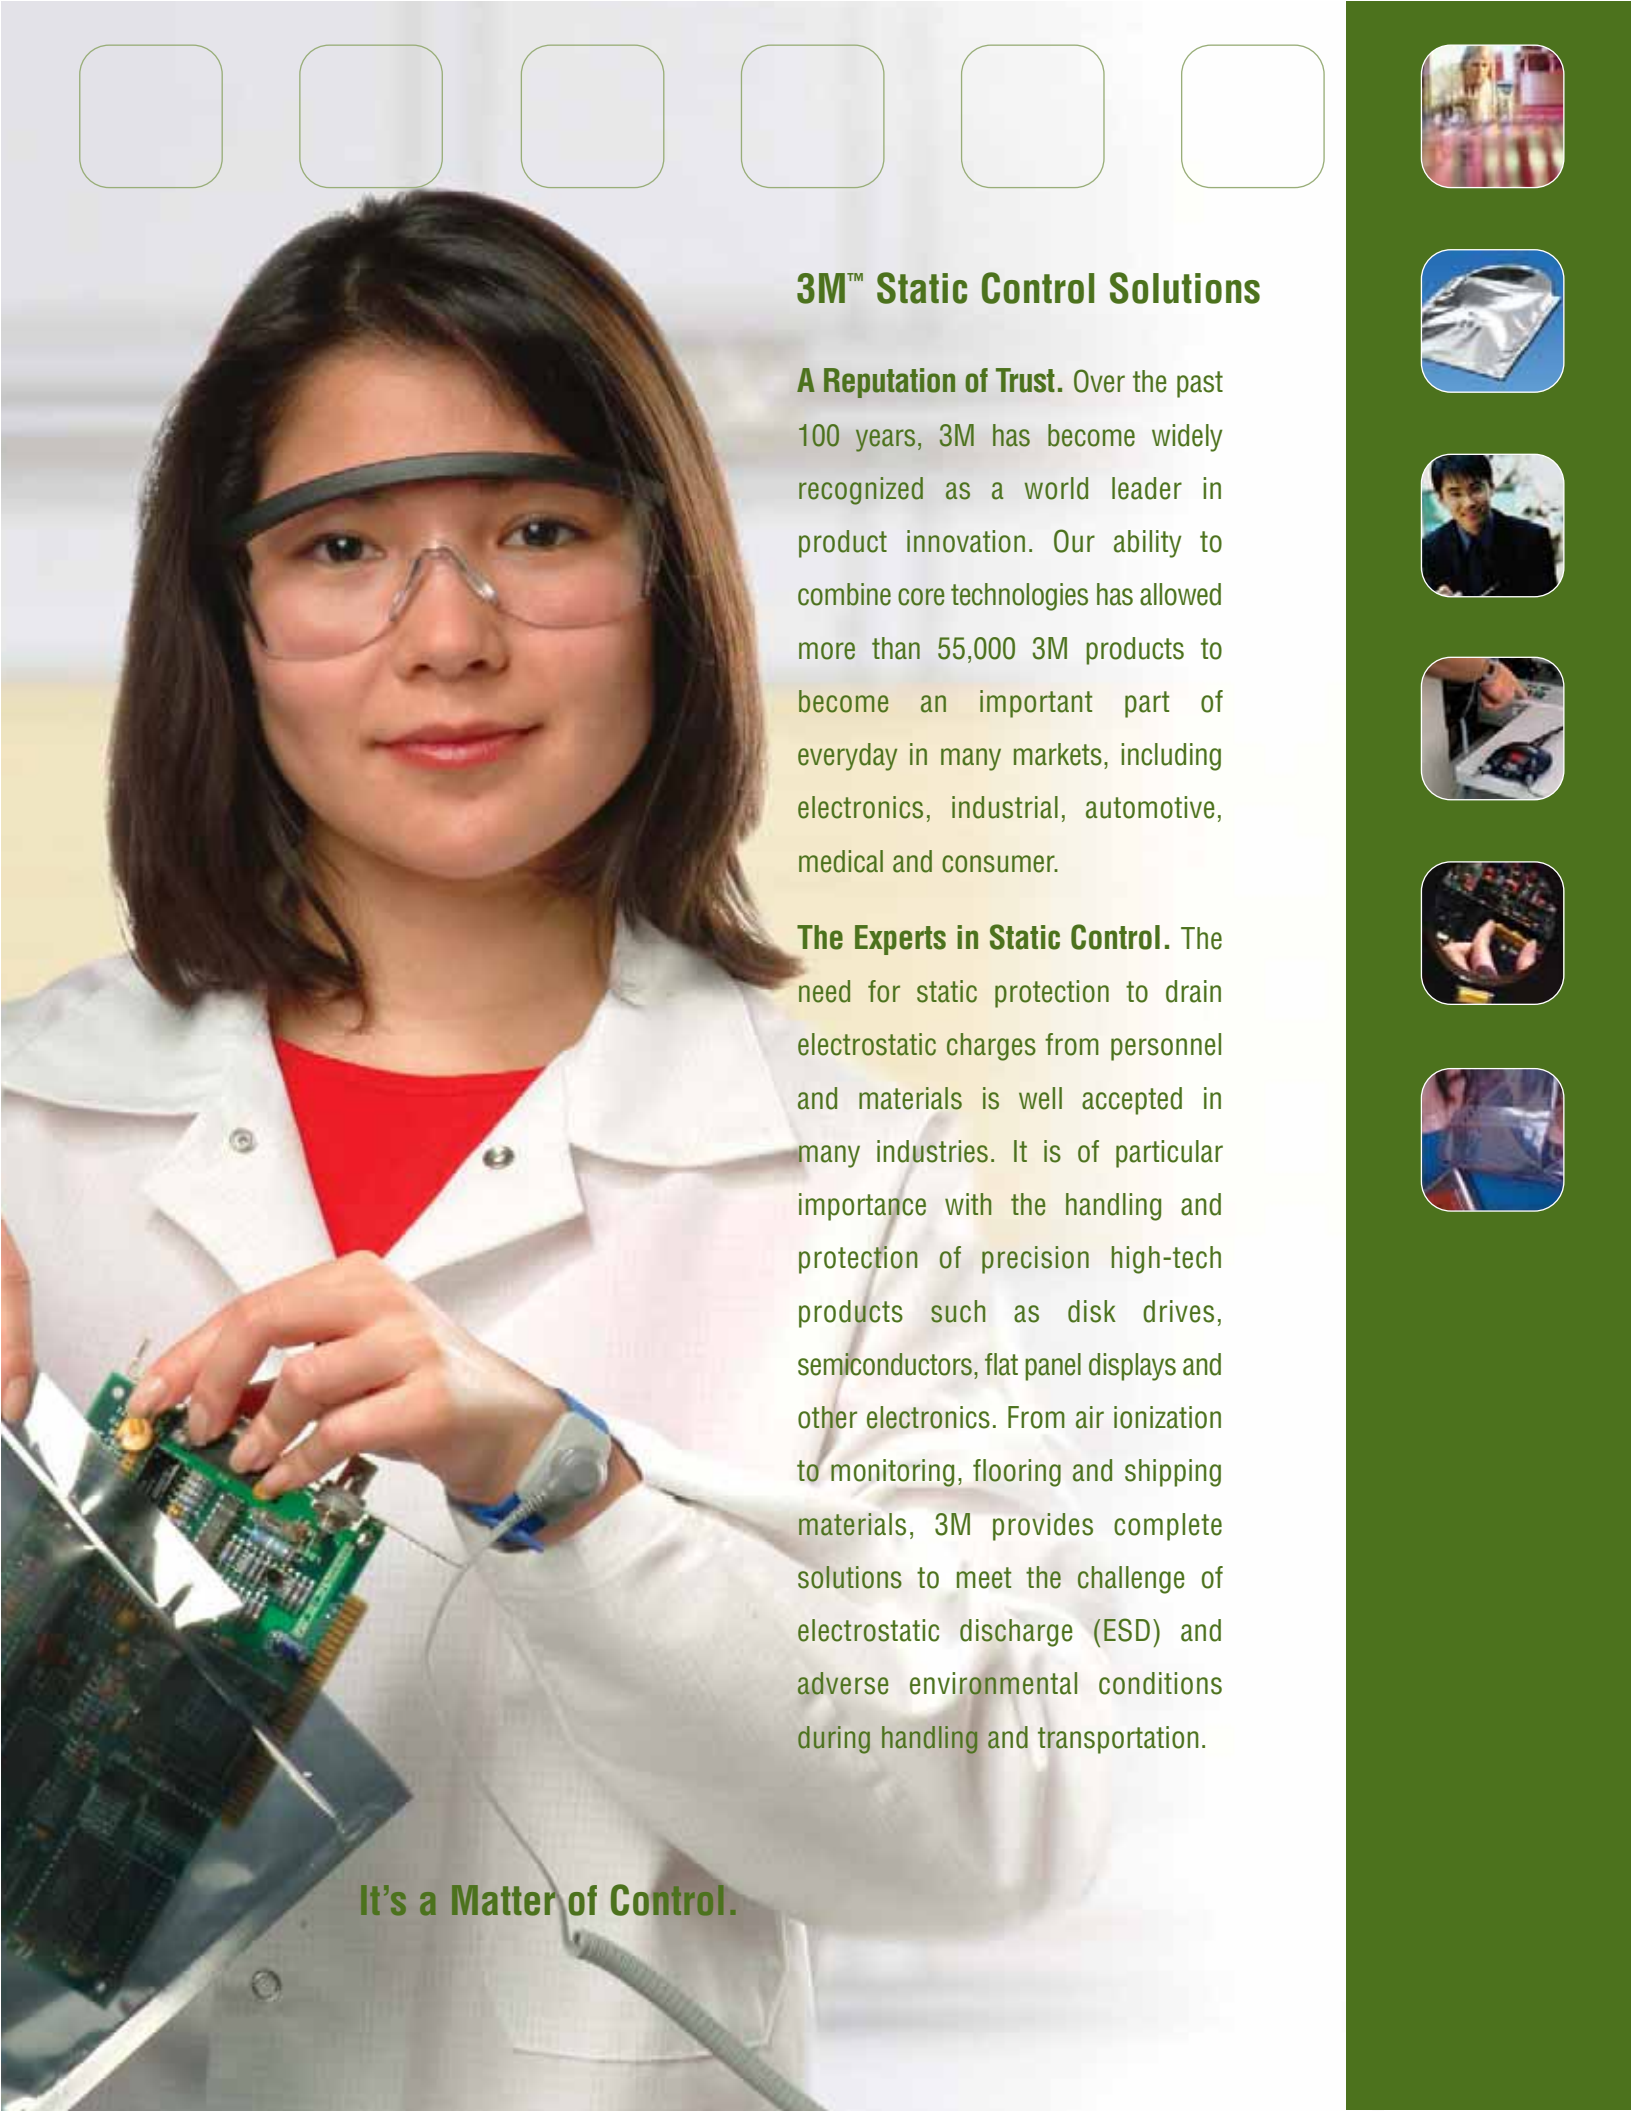

3M™ Static Control Solutions

A Reputation of Trust. Over the past 100 years, 3M has become widely recognized as a world leader in product innovation. Our ability to combine core technologies has allowed more than 55,000 3M products to become an important part of everyday in many markets, including electronics, industrial, automotive, medical and consumer.

The Experts in Static Control. The need for static protection to drain electrostatic charges from personnel and materials is well accepted in many industries. It is of particular importance with the handling and protection of precision high-tech products such as disk drives, semiconductors, flat panel displays and other electronics. From air ionization to monitoring, flooring and shipping materials, 3M provides complete solutions to meet the challenge of electrostatic discharge (ESD) and adverse environmental conditions during handling and transportation.

It's a Matter of Control.

Assembly

Test

Packaging



Assembly

- 1 Personnel Grounding Products Chapter 1, p. 2
- 2 Workstation Monitors Chapter 1, p. 8
- 3 Shoe Grounding Products Chapter 1, p. 6
- 4 Worksurfaces Chapter 1, p. 16
- 5 Tile or Epoxy Flooring Chapter 5, p. 64
- 6 Rigid Containers Chapter 2, p. 42
- 7 Worksurfaces Chapter 1, p. 16
- 8 Test Kits Chapter 3, p. 48
- 9 Charge Analyzers Chapter 3, p. 31
- 10 Air Ionizers Chapter 1, p. 29

Test

- 11 Wrist Strap/Footwear Testers Chapter 3, p. 53
- 12 Tile or Epoxy Flooring Chapter 5, p. 64
- 13 Workstation Monitors Chapter 1, p. 8
- 14 Shoe Grounding Products Chapter 1, p. 6
- 15 Workstation Monitors Chapter 1, p. 8
- 16 Personnel Grounding Products Chapter 1, p. 2
- 17 Shoe Grounding Products Chapter 1, p. 6
- 18 Static Shielding Bags Chapter 2, p. 36
- 19 Moisture Vapor Barrier Bags Chapter 2, p. 39
- 20 Tile or Epoxy Flooring Chapter 5, p. 64

ESD PROTECTION FOR YOUR ENTIRE FACILITY

3M provides comprehensive solutions to protect your operation from electrostatic discharge every step of the way. The illustration above demonstrates where our products can help. Follow this chart, then turn to that page in this catalog for a complete listing of products in that category available from 3M.

ASSEMBLY

ESD protection in manufacturing and assembly is a critical area that requires a successful static control management system. 3M offers a complete line of grounding and static-protective products for use during these processes. From personnel to worksurfaces, floors, and packaging, 3M has you covered.

TEST

Electrical overstress in components caused by ESD can result in either a catastrophic failure or a shortened life of the component. Damaged or destroyed devices typically are found in final testing, while weakened devices often result in a field failure. 3M™ Monitoring Systems can record ESD events in real time, providing instant notification of static-control equipment failures.

PACKAGING

Degraded or weakened devices that pass all factory tests, but then fail after they have reached the customer are a very expensive problem. 3M provides customers with value-added solutions for protecting devices from static and physical damage during material handling, storage and transport.

A full range of products. Full-service solutions.



THE NEED FOR COMPLETE STATIC CONTROL SOLUTION

In an increasingly technological age, electrostatic discharge (ESD) is more than just an annoyance, it can be costly or even dangerous. In static-sensitive environments, ESD can damage sensitive electronic components, attract contaminants in clean environments or cause problems when handling films or small parts.

The cost of ESD-damaged electronic devices alone adds up, but the additional loss of production time is significant as well. Clearly, opportunities exist for significant improvements in reducing losses to ESD and static electricity.

GLOBAL SUPPORT FROM THE INDUSTRY LEADER

3M has built a global network of resources with the ability to address your needs on local, regional and international levels. With each facility in your operation, our experienced team works with you one-on-one to evaluate each step in the process to accurately provide a static control solution uniquely suited to meet your needs. 3M is your single source for fast, customized solutions anywhere in the world.

VALUE-ADDED SERVICES THAT SET US APART

Our products are designed to be reliable and dependable, but it is our customer services that truly demonstrate our extended value to you. To help you reduce your total cost of ownership, 3M offers a long list of value-added services, including local warehousing, custom make-to-order, just-in-time manufacturing (JIT), electronic funds transfer, web PO, EDI, extranet services for key customers, on-site training and more.

Section

Pages

1. Static Control Workstation Solutions	1
Personnel Grounding Products	2-7
Wrist Straps (Single Conductor)	2
Shoe Grounding	6
Static Control Monitors	8-15
Wrist Straps (Dual Conductor)	14
Table/Floor Mats and Runners.....	16-21
Vinyl Mats.....	16
Rubber Mats	17
Velostat™ Mats	18
Rigid Laminates	19
Field Service Kits.....	22-25
Hardware and Accessories	27-28
Air Ionizers	29-33
Overhead	29
Gun	30
Benchtop.....	31
Static Sensor/Ionizer Tester	33, 57
2. Static Control Packaging and Transportation Products	35
Shielding and Barrier Packaging.....	36-41
Moisture Vapor Barrier	39
Conductive Packaging.....	40-41
Conductive Film and Tubing	40
Conductive Bags and Drum Liners.....	41
Single Card Device Carriers	42
Connector Covers.....	43-44
Labels	45
Hinged Containers.....	46
3. Test Equipment	47-57
Test Kits.....	48-50
Charge Analyzers	51-52
Shoes/Wrist Strap Testers	53-56
4. Training	59-61
5. Permanent Flooring Products	63-66
6. Tapes.....	67-72
7. Electrostatic Discharge Control Measures	73-74
8. Ordering Information	75
9. International Information	75-77
10. Index.....	78-80

Static Control Workstation Solutions

1

3M™ Electrostatic Discharge (ESD) Workstation Solutions can provide a safe environment for the handling and assembly of sensitive components. These products drain static charge from personnel, limit the buildup of static charges on non-conductive materials on the benchtop, and monitor the system to ensure that it is operating properly. These various components can be configured to work together providing optimal protection for your application.






Static Control Workstation Solutions

Adjustable Fabric Wrist Straps (Single Conductor)

3M™ Adjustable Wrist Straps are the front line of defense in all static control processes. Provide a comfortable, custom fit with these adjustable wrist straps. One size adjusts to any size wrist to provide reliable, 360 degree protection. These wrist straps feature a band made of a silverplated, monofilament, continuous thread woven together with elastic nylon to assure full conductivity, comfort and reliability, while providing rapid and continuous drain of static charge. Adjustability also simplifies ordering procedures and inventory control by eliminating the need to order and stock several band sizes. A one megohm resistor is built into the ground cord. Available with 4 mm snap end. Adjustable bands fit wrist circumference up to 9.0 in. (228.6 mm).

Product No.	Description
2204	Adjustable Fabric Wrist Band, made of knitted fabric, in burgundy color.
2214	Fabric Wrist Band with coiled cord. 5 ft. (1.5 m) practical extended length with burgundy adjustable fabric band. Includes alligator clip.
2224	Fabric Wrist Band with coiled cord. 10 ft. (3.0 m) practical extended length with burgundy adjustable fabric band. Includes alligator clip.

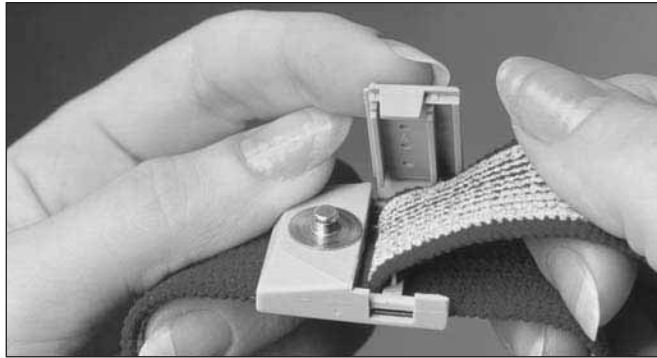

3M™ Adjustable Wrist Strap for Single Conductor Cords

Product No.	Description
2271	Economy Adjustable Fabric Wrist Band is made of stretch weave fabric, blue color with white trim.
2272	Economy Adjustable Wrist Band with coiled cord. 5 ft. (1.5 m) practical extended length, blue color with white trim. Includes alligator clip.

Fixed Size Metal Wrist Straps (Single Conductor)

3M™ Metal Wrist Straps 2200 Series feature quality Speidel™ metal expansion bands for durability and comfort. Each link is covered with an insulative plastic cap. Compatible with the 3M™ Wrist Strap Ground Cords 2210, 2220 and 4610/4611.

Three sizes are available: small for wrists from 4.5 in. to 6 in. (114 mm to 152 mm) in circumference; medium for wrists from 5.5 in. to 7.25 in. (140 mm to 184 mm); and large for wrists larger than 6.5 in. (165 mm). Available with 4 mm snap end.

Product No.	Description
2205	Bulk pack of 25 metal wrist bands. (Small)
2206	Bulk pack of 25 metal wrist bands. (Medium)
2207	Bulk pack of 25 metal wrist bands. (Large)



3M™ Wrist Band 2205



Adjustable Thermoplastic Wrist Straps

The 3M™ Adjustable Wrist Straps 4600 Series feature a thermoplastic band with an integrally molded conductive interior. The wrist strap utilizes an easy on/easy off adjustable “zipper” style latching mechanism and is available with 4 mm snaps and 5 ft. ground cords. (10 ft. ground cord available with 4 mm snap only.)



3M™ Wrist Band 4600 Series shown with ground cord and alligator clip

Product No.	Description
4610	Ground Cord, Coiled, 5 ft. (1.5 m), 4 mm snap end. Includes alligator clip.
4611	Ground Cord, Coiled, 10 ft. (3.0 m), 4 mm snap end. Includes alligator clip.

Product No.	Color	Description
4620	Blue	Wrist Band with 4 mm stud.
4650	Blue	Wrist Band with 5 ft. coiled cord, 4 mm stud. Includes alligator clip.


Grounding Cord 4600 Properties

Grounding Cord	Typical Value
Tensile Strength	> 15 lbs. (6.8 kg)
Average Termination flex life per ESD S1.1 and MIL-PRF-87893	> 200,000 flexes
Resistance End-to-end	1M Ω \pm 20%
Resistor Type	1M Ω -metal film \pm 20%

Wrist Band 4600 Properties

Wrist Strap	Typical Value
Wrist Band Size	Adjustable, small/large, trim to size 1.7 to 2.7 in dia. (43.2 mm to 68.6 mm)
Resistance - Inside/Outside	> 100M Ω
Cleanable	Water/mild detergent or 10% isopropyl solution

Latch Durability 3M Adjustable Wrist Straps 4600/4700 Series

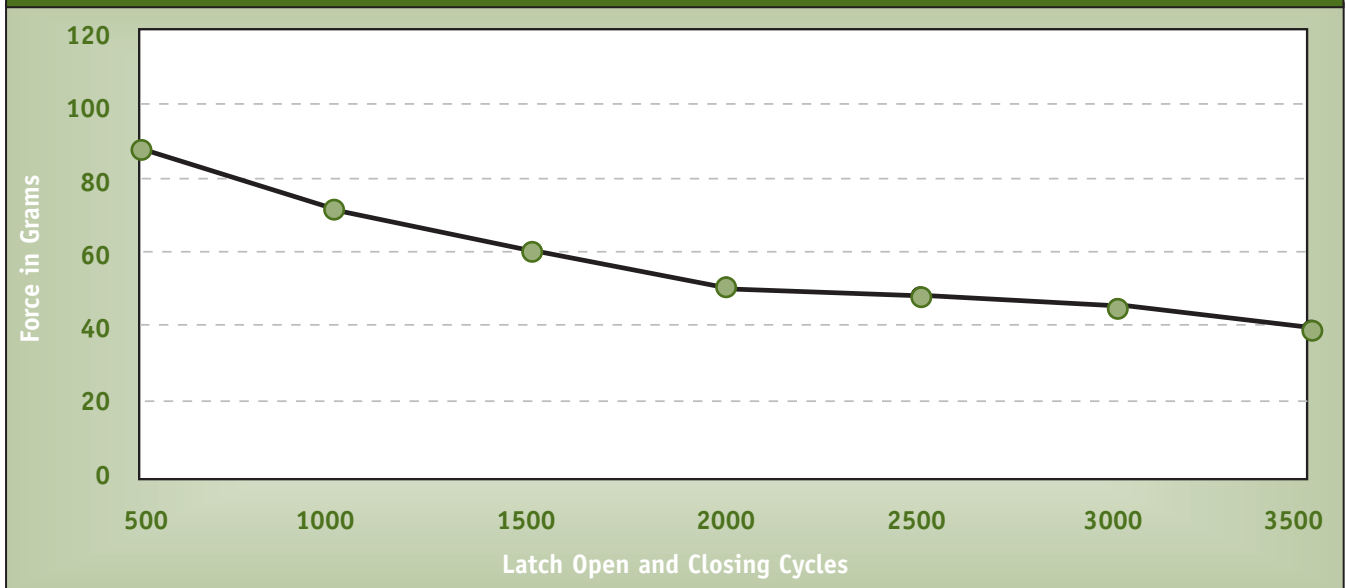



Static Control Workstation Solutions

Wrist Strap Ground Cords

3M™ Wrist Strap Ground Cords 2210, 2220 and 4610 Series are highly durable with segmented strain relief, and a single bundle of tinsel conductors laced for great strength and reinforced with strong synthetic fibers. These features provide long cord life and easy movement. Each cord has a 1 megohm resistor molded into the snap end.



3M™ Ground Cord 2210



3M™ Ground Cord 4610 (includes Alligator Clip not shown)

Product No.	Description
2210	Ground Cord, coiled 5 ft. (1.5 m) practical extended length. Includes alligator clip.
2220	Ground Cord, coiled 10 ft. (3.0 m) practical extended length. Includes alligator clip.
4610	Ground Cord, coiled, 5 ft. (1.5 m), 4 mm snap end. Includes alligator clip.
4611	Ground Cord, coiled, 10 ft. (3.0 m), 4 mm snap end. Includes alligator clips.



Warning on all wrist strap products:

A one megohm resistor is molded into 3M Wrist Strap Ground Cords. **DO NOT REMOVE.** If it becomes damaged, replace ground cord immediately. These products are not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 250 Volts AC.

These products are for static control. They will not reduce or increase your risk of receiving electrical shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the 3M Wrist Strap.



Disposable Wrist Straps


The 3M™ Disposable Wrist Strap 2209 can provide cost-effective and reliable static protection. The wrist strap is ideally suited for shipment along with components and devices, such as memory upgrades, sound cards, etc., to provide protection at the receiving end. It may also be used for short-term use in the plant for visitors and others who don't need the durability of a reusable strap.

At the end that wraps around the wrist, a hypoallergenic adhesive provides 360 degree contact with the skin to minimize skin-to-band resistance. At the other end, the conductive adhesive on the copper foil tape adheres to any convenient electrical ground. A current-limiting resistance is fabricated into the plastic ribbon below the wrist band.

Each Disposable Wrist Strap 2209 is individually packaged in a clear poly envelope. Custom printing is available by special order.



3M™ Disposable Wrist Strap 2209

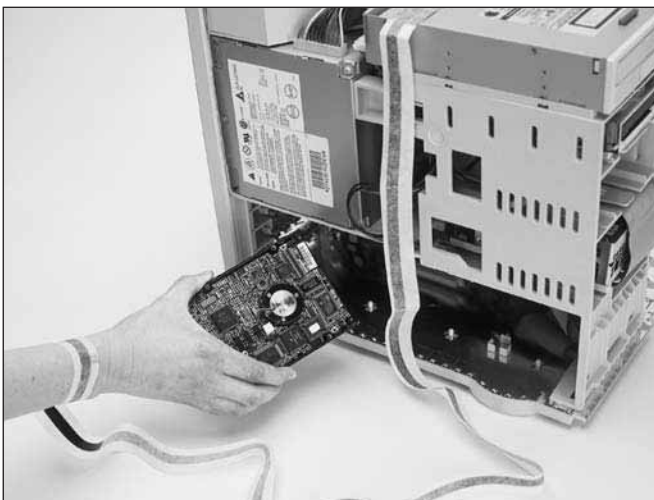

3M™ Disposable Wrist Strap 2209

Product No.	Description
2209	Disposable Wrist Strap.

Custom envelope imprinting is available.

2209 Properties

Item	Typical Properties
Ground/Bonding End	Copper foil with conductive adhesive on both attached to conductive ribbon.
Conductive Ribbon	Flexible conductive film, with fabricated current limiting resistance near wrist band end. Conductive ribbon enclosed in non-woven adhesive tape.
Wristband End	Conductive ribbon with exposed hypo-allergenic adhesive along each side of conductive ribbon
Practical Working Length	4 ft. (1.2 m)
Electrical Resistance End to End	1.0 to 5.0 Megohms

3M
Disposable Wrist Strap 2209

INSTRUCTIONS

1. Unwrap 12" (30 cm) of the band and wrap adhesive side around your wrist.
2. Unroll rest of band and remove liner from copper tape.
3. Attach the copper tape to electrical ground or the metal frame of equipment you are servicing.

UL LISTED

Standard envelope

A • B • C
Electronics
1•800•000•0000

Manufactured for
ABC Electronics
by 3M.

INSTRUCTIONS

1. Unwrap 12" (30 cm) of the band and wrap adhesive side around your wrist.
2. Unroll rest of band and remove liner from copper tape.
3. Attach the copper tape to electrical ground or the metal frame of equipment you are servicing.

UL LISTED

Custom envelope example





Static Control Workstation Solutions

Disposable Shoe Grounding Assembly

3M™ Disposable Shoe Grounding Straps 2045 provide a reliable path for static charge to drain to ground when personnel are wearing shoes with insulative soles.

The shoe grounding straps are especially desirable in work situations where personnel must move around – wave soldering, automatic insertion or operation of sensitive computerized equipment. To be effective, the shoe grounders must be worn on both feet.



3M™ Disposable Shoe Grounding Straps 2045

Product No.	Description
2045	Disposable Shoe Grounding Straps. (100 per box). One size fits all low cut shoes.

Warning:

The Disposable Shoe Grounding Strap 2045 is not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 120 Volts AC.

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.

Toe Grounding Assembly

Designed for use with high-heeled shoes, the 3M™ Toe Grounding Assembly 2053 grounds personnel when they are in contact with conductive/dissipative flooring. A comfortable elastic ankle strap and 12 in. (30.5 cm) long conductive ribbon for insertion into the shoe complete the ground path to the operator. To be effective, the shoe grounders must be worn on both feet. Available with a 1 megohm resistor.



3M™ Toe Grounding Assembly 2053

Product No.	Description
2053	Toe Grounding Assembly with a 1 megohm resistor.

Warning:

The Grounding Assembly 2053 is not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 250 Volts AC.



Heel Grounding Assembly

The 3M™ Economy Heel Grounder 2044 — a cup-style heel grounder with a high visibility “yellow glow” strap that helps facility supervisors effectively manage their static control program. With the Economy Heel Grounder 2044, supervisors may now see at a single glance whether employees are properly wearing their heel grounding assemblies, and ensure their company is protected against static damage. Dependable and cost-efficient, the Heel Grounder 2044 effectively grounds mobile personnel when they are in contact with conductive and dissipative flooring, and should be an integral part of any static control system in the workplace.

In addition to the bright yellow coloring, the Heel Grounder’s cup construction satisfies customer need for durability, while the one-inch width of the ankle strap material is designed with a “one size fits all” conformity of fit that will accommodate a wide variety of shoe shapes and sizes.



3M™ Shoe Grounding Assembly 2044

The 3M™ Shoe Grounding Assembly 2051 effectively grounds mobile personnel when they are in contact with conductive and dissipative flooring. The conductive, no-slip outer sole provides a reliable static ground. After being trimmed to a desired length, an extra-long contact ribbon is inserted between the shoe and sock. The function of the Shoe Grounding Assembly depends upon foot perspiration in the shoe to sustain electrical contact between the conductive ribbon and the body. The Shoe Grounding Assembly 2051 comes with a one megohm resistor.



3M™ Shoe Grounding Assembly 2051

Product No.	Description
2044	Economy Shoe Grounding Assembly with a 1 megohm resistor.
2051	Shoe Grounding Assembly with a 1 megohm resistor.
2056	Non-marking Shoe Grounding Assembly with a 1 megohm resistor.

*To be effective, shoe grounders must be worn on both feet.

Warning:

The 3M Heel Grounding Assemblies 2044, 2051 and 2056 Series are not to be used in areas where the individual may come in contact with exposed electrical circuitry exceeding 250 Volts AC.

The 3M™ Non-Marking Shoe Grounding Assembly 2056 reliably grounds mobile personnel when they are in contact with conductive and dissipative flooring. The non-marking conductive, carbon-free, non-slip outer layer provides a dependable static ground while the inner layer provides a non-marking surface for the shoe. After being trimmed to a desired length, an extra-long contact ribbon is inserted between the shoe and sock. The function of the heel grounding assembly depends upon the foot perspiration in the shoe to sustain electrical contact between the conductive ribbon and the body. The Shoe Grounding Assembly 2056 is designed with a one megohm resistor.






3M™ Non-marking Shoe Grounding Assembly 2056



Static Control Workstation Solutions

Wrist Strap / Continuous Workstation Monitor Applications Chart

Function	Monitors		
	3M™ Static Monitor 790	3M™ Workstation Monitor 724	3M™ Wrist Strap Monitor 725
			
Monitors one wrist strap			•
Monitors two wrist straps	•	•	
Monitors worksurface to ground connections		•	
Monitors person's voltage	•		
Monitors wrist strap resistance		•	•
Uses dual conductor wrist strap	•	•	•
Feature			
Audible alarms	•	•	•
Visual alarms	•	•	•
Portable	•		•
Wrist band type			
Regular (Dual conductor)		•	•
VM Series (Dual conductor)	•		
Housing			
Anodized steel		•	
Dissipative plastic	•		•

Wrist Strap / Continuous Workstation Monitor Compatibility Chart

Wrist Band Description	Model No.	Monitors		
		3M™ Static Monitor 790	3M™ Workstation Monitor 724	3M™ Wrist Strap Monitor 725
Fabric Wrist Band, Adjustable, Dual Conductor	2368		•	•
Fabric Wrist Band, Adjustable, Dual Conductor	2368VM	•		
Metal Wrist Strap with 5 ft. Dual Conductor Cord, Small	2381		•	•
Metal Wrist Strap with 5 ft. Dual Conductor Cord, Small	2381VM	•		
Metal Wrist Strap with 5 ft. Dual Conductor Cord, Medium	2382		•	•
Metal Wrist Strap with 5 ft. Dual Conductor Cord, Medium	2382VM	•		
Metal Wrist Strap with 5 ft. Dual Conductor Cord, Large	2383		•	•
Metal Wrist Strap with 5 ft. Dual Conductor Cord, Large	2383VM	•		
Metal Wrist Band, Dual Conductor Cord, Small	2384		•	•
Metal Wrist Band, Dual Conductor Cord, Small	2384VM	•		
Metal Wrist Band, Dual Conductor Cord, Medium	2385		•	•
Metal Wrist Band, Medium	2385VM	•		
Metal Wrist Band, Large	2386		•	•
Metal Wrist Band, Large	2386VM	•		
Dual Conductor Wrist Band, Blue	4720		•	•

Size Key:

Small—for wrists 4¹/₂ in.–6 in.
 Medium—for wrists 5¹/₂ in.–7¹/₄ in.
 Large—for wrists >6¹/₂ in.



Static Monitor

The 3M™ Static Monitor 790 is a cost efficient unit that is small, compact and versatile in its usage, and may be mounted directly onto device handling equipment, testers, and auto insertion equipment.

Housed in static dissipative plastic, the Static Monitor 790 works by measuring the voltage potential on a person referenced to earth ground. The monitor uses a slide switch allowing the user to select the voltage level necessary for the specific job function being performed.

The Static Monitor 790 has two wrist strap input jacks located on its front, which allows two operators to use one monitor unit at a workstation simultaneously. Power is supplied to the unit through an AC adapter.

Three distinct alarms make it easy to identify operators and the type of fault condition. The audible alarm can be adjusted to a low or high level to overcome background noise from other equipment that may be in use in the area. Ring terminals on the end of the unit's ground and chassis cords provide a permanent connection.

Product Features

- Audible and visual alarms
- Compact system
- Select voltage alarm levels of 1V, 3V, 6V & 9V
- Static-dissipative plastic housing
- Mounts easily to ESD worksurface
- Regulatory Compliance: UL & CE
- VM fabric and metal bands are to be used specifically with the Static Monitor 790



3M™ Static Monitor 790

Product No.	Description
790	Static Monitor Monitor includes: <ul style="list-style-type: none"> • 790 Static Monitor • 790AC Adapter (available without AC Adapter) • 3M™ Dual Lock™ Mounting Fasteners • 2-Wire Connector

Product No.	Description
Accessories	
790MP	Mounting Plate for 790 (10 per package)
790VK	Verification Kit
3057	Stand By Jack
	Dual Conductor Bands and Cords (see page 8 for additional information on wrist band and cord combinations.)

790 Properties

Item	Typical Properties
Monitor Size	3.5 x 4.0 x 1.25 in. (8.9 x 10.2 x 3.2 cm), approximate H x W x D
Power Supply Requirements	
Input	120 Vac ±10% (North America)
Outside North America	(As required)
Output	25 Vdc @ 50 mA rated load
Output Plug Polarization	Center negative
Output Plug Dimensions	5.5 mm x 2.1 mm x 9.5 mm (OD x ID x L)
Accuracy	(The following parameters are valid for altitudes up to 2000 m. Pollution degree 2, Class 3, Equipment)
Voltage Detection Levels	(1V ±15%) (3V, 6V, & 9V ±10%)
Ground Disconnect	10 ohms ±20%
Environmental Operating Conditions	
Temperature	Max. 104°F (40°C); Min. 50°F (10°C)
Humidity	Max. 75% relative humidity





Static Control Workstation Solutions

Static Monitor


The 3M™ Workstation Monitor 724 continuously verifies the resistance of the operator and worksurface ground connections. The monitor uses a reliable resistance method that actually includes the operator's skin resistance to determine if the system is operating properly. If the operator's resistance exceeds pre-set levels of 10 megohms or 35 megohms, or the wiring connections exceed 3.7 megohms, audible and visible alarms are triggered. The unit will also warn of potentially dangerous low-resistance situations. A switch allows the user to select either a 9V or 16V test voltage, and 10 megohms or 35 megohms resistance setting.

The monitor uses the light, compact dual conductor wrist strap (purchased separately; see page 16). Dual conductors provide the resistance circuit that is monitored and grounding redundancy. If one conductor fails, the other will still function to prevent sensitive components from being exposed to static.

The Workstation Monitor 724 monitors a visitor to the workstation or a second operator. In addition, the loudness of the alarm is adjustable. A quick connect/disconnect 3M™ Remote Input Jack 732 comes with the Workstation Monitor.



3M™ Workstation Monitor 724 pictured with 3M™ Remote Input Jack 732, 3M™ Dual Conductor Wrist Band 4700 and the 3M™ Dual Conductor Cord 2360. (Ground Cord and band not included)

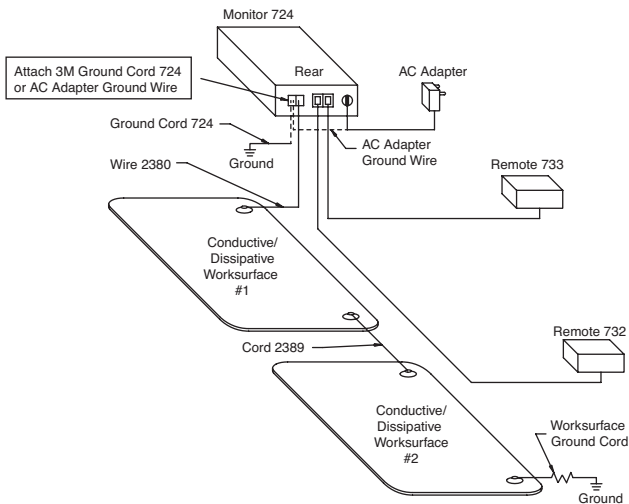

Product No.	Description
724	Workstation Monitor complete with a quick connect/disconnect 732 Remote Jack and mounting hardware.

Packaged with Certificate of Conformance.


724 Properties

Item	Typical Properties
Dimensions	6.5 x 3.125 x 1.375 in. (16.5 x 7.9 x 3.5 cm)
Power Supply	25 Vdc @ 50 mA minimum
Test Voltage	9 Vdc or 16 Vdc (Switch selectable)
Test Current	Less than 3 microamps
Upper Resistance Limits	Wrist Strap: 10 or 35 Megohms (Switch selectable) Worksurface: 3.7 Megohms
Lower Resistance Limit	Wrist Strap: 1.5 Megohms Worksurface: None
Accuracy	± 15%
Environmental Operating Conditions	
Temperature	Max. 110°F (43°C) Min. 50°F (10°C)
Humidity	Max. 75% R.H.
Accessories	Model 733 Remote Splitter Kit Model 3057 Stand-By Jack

Note: Only use 3M Dual Conductor Bands and Cords with 3M™ Monitors 724 and 725. 3M workstation monitors were designed to work with the 3M™ Worksurfaces 8200, 8300 and 8800 Series. Other types of mats may cause the "Mat" lamp on the monitor to light. This is due to a high electrical resistance between the grounding snaps.

The worksurface ground resistance circuit of the 3M workstation monitor indicates a malfunction when the ground loop resistance exceeds 3.7 megohms. To determine if your mat is within this limit, perform the following procedure using an ohmmeter.

Measure the resistance between the snap on the mat, where you intend to connect the 3M™ Monitor/Table Mat Replacement Cord 2380, and the ground point for the mat. Be sure the mat is connected to ground.

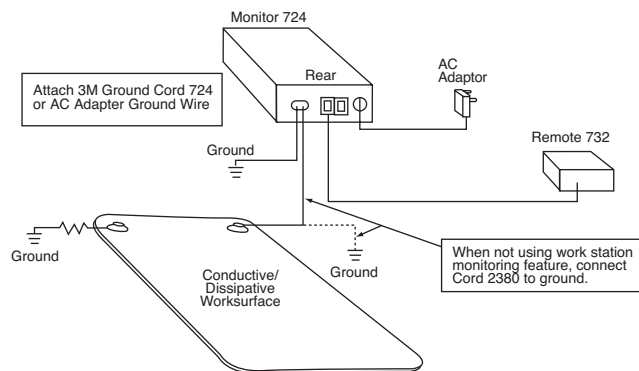



Dual Conductor Portable Wrist Strap Monitor


The 3M™ Wrist Strap Monitor 725 is a small, compact, battery-powered unit that continuously monitors both the worker and the worker's wrist strap. The monitor uses a reliable resistance method that includes the worker's skin resistance to determine if the system is operating properly. The monitor uses the same dual conductor wrist strap as used with the 3M™ Workstation Monitor 724. In addition, the monitor 725 also monitors the ground wire connection and battery level.

The Wrist Strap Monitor 725 immediately alerts the individual when a wrist strap is operating improperly. The monitor 725 continuously supplies a current that is returned through a wrist band and cord that contain two separate independent conductors.

The monitor is a compact, portable, battery-powered unit with a visual and an audible alarm. A "parking plate" mounted on the monitor 725 allows an individual to disconnect the ground cord and clip it to the parking plate to "silence" the alarm when moving from one work area to another. The 3M™ Belt Clip 723 is available as an accessory item and may be purchased separately.

The competitively priced Wrist Strap Monitor 725 can be used in manufacturing and field service environments. By contributing to the protection of static sensitive devices and printed circuit boards from static damage, the monitor can save money and time as a result of improved yield rates and lower field service costs.

The Wrist Strap Monitor 725 ships with a Certificate of Conformance.

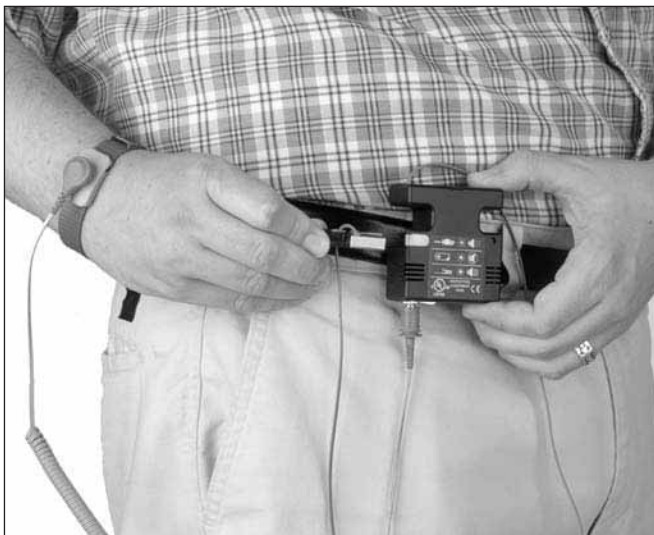

3M™ Wrist Strap Monitor 725



Note: Only use 3M™ Dual Conductor Bands and Cords with the Monitor 725. See page 8 for additional information on wrist band and cord combinations.

Product No.	Description
725	Personal and portable Wrist Strap Monitor for use in manufacturing and field service environments. The monitor 725 features wrist strap monitoring and grounding for ESD mats/work surfaces. Accessory belt clip 723 converts the monitor into a portable/personal monitor.
723	Accessories: Belt Clip 723 Size, in. (cm) 2.5 x 2.625 x 1.125 (6.4 x 6.7 x 2.9)

725 Properties

Item	Typical Properties
Dimensions	2.5 x 2.6 x 1.1 in. (6.4 x 6.6 x 2.8 cm)
Power Supply	9 Volt alkaline battery (Not supplied)
Test Voltage	9 Vdc maximum
Test Current	Less than 1 microamp
Upper Resistance Limits	Wrist Strap: 35 Megohms Ground Clip: 10 Megohms
Accuracy	± 15%
Environmental Operating Conditions	
Temperature	Max. 110°F (43°C), Min. 50°F (10°C)
Humidity	Max. 75% R.H.
Accessories	Belt Clip 723



Belt Clip 723

Product Referral Generator

Verification Kits 724VK and 725VK..... pg. 12



Static Control Workstation Solutions

Monitor Verification Kits

The 3M™ Verification Kits 724VK and 725VK were designed to check the wrist strap input resistance ranges of the 700 Series Workstation and Wrist Strap Monitors. The 3M™ Verification Kit 790VK contains hardware items for connecting to the 3M™ Static Monitor 790, that are recommended when performing the verification procedure. Use of this kit allows for reliable connections to the Monitor 790. In addition to this kit, a DC power supply and resistance substitution box are required (supplied by user). See instruction manual for complete details.



3M™ Verification Kit 724VK



3M™ Verification Kit 725VK



3M™ Verification Kit 790VK

Product No.	Description
724VK	Verification Kit Six 1% Resistor Plugs and Case
725VK	Verification Kit Four 1% Resistor Plugs and Case
790VK	Verification Kit One 5 ft. 2360 dual conductor cord, one test wrist band socket assembly, and one two-wire male connector with 24 in. lead wire.

724VK Contents

Item	Value
Test Plug #1	Resistor, Metal Film, 1.33 Megohms ± 1%, 1/4 Watt
Test Plug #2	Resistor, Metal Film, 1.69 Megohms ± 1%, 1/4 Watt
Test Plug #3	Resistor, Metal Film, 8.45 Megohms ± 1%, 1/4 Watt
Test Plug #4	Resistor, Metal Film, 11.5 Megohms ± 1%, 1/4 Watt
Test Plug #5	Resistor, Metal Film, 29.4 Megohms ± 1%, 1/4 Watt
Test Plug #6	Resistor, Metal Film, 40.2 Megohms ± 1%, 1/4 Watt

725VK Contents

Item	Value
Test Plug #1	Resistor, Metal Film, 29.4 Megohms ± 1%, 1/4 Watt
Test Plug #2	Resistor, Metal Film, 40.2 Megohms ± 1%, 1/4 Watt
Test Plug #3	Resistor, Metal Film, 4.99 Megohms ± 1%, 1/4 Watt
Test Plug #4	Resistor, Metal Film, 11.5 Megohms ± 1%, 1/4 Watt

790VK Contents

Item	Value
Dual Conductor Cord 2360, 5 ft.	
Test Wrist Band Socket Assembly	
Two-Wire Male Connector with 24 in. lead wire	



Dual Conductor Remote Input Jacks

The 3M™ Remote Input Jack 732 may be purchased as a replacement part for the 3M™ Workstation Monitor 724. It provides two phonejacks – one for the primary worker and one for use by visitors to the work area. The 3M™ Remote Splitter Kit 733 may be purchased for use in conjunction with the Workstation Monitor 724. It offers the versatility of grounding and monitoring two workers at independent workstations that are in close proximity. The units feature a quick “connect/disconnect” system.



3M™ Remote Input Jack 732



3M™ Remote Splitter Kit 733

Product No.	Description
732	Replacement Remote Input Jack for the 724 Workstation Monitor. 6 ft. (1.8 cm) long cord. Size, in. (cm) 3.188 x 1 x 1.5 (8.1 x 2.5 x 3.8)
733	Remote Splitter Kit, 6 ft. (1.8 cm) long cord. Size, in. (cm) 3.188 x 1 x 1.5 (8.1 x 2.5 x 3.8)

Monitor Stand-By Jack

The 3M™ Monitor Stand-by Jack 3057 allows an operator to disconnect a ground cord from the wrist band and leave the workstation without deactivating the Workstation Monitor 724 or the 3M™ Static Monitor 790. Simply detach the cord from the wrist band and plug it into the 3M Stand-by Jack 3057.



3M™ Stand-By Jack 3057

Product No.	Description
3057	Stand-By Jack.

The 3M™ Monitor/Table Mat Replacement Cord 2380 extends from the Workstation Monitor 724 to the static-control worksurface to be monitored.

The 3M™ Monitor/Table Mat Interconnect Cord 2389 is a 10 ft. straight cord with male snap fasteners at each end. It is used to interconnect two monitored worksurfaces together.



3M™ Monitor/Table Replacement Cord 2380



3M™ Monitor/Table Mat Interconnect Cord 2389

Product No.	Description
2380	Monitor/Table Mat Replacement Cord, 6 ft. (1.8 m).
2389	Monitor/Table Mat Interconnect Cord, 10 ft. (3 m).

Note: These cords do not have a resistor molded into the snap fastener cap.



Static Control Workstation Solutions

Dual Conductor Fabric Wrist Straps for Monitors

The 3M™ Dual Conductor Fabric Wrist Strap 2368 is used exclusively with the 3M™ Workstation Monitor 724 and 3M™ Wrist Strap Monitor 725 and 3M™ Static Monitor 790.

One size adjusts to any size wrist to provide reliable protection. The wrist strap features a band made of a silver plated, monofilament, continuous thread woven together with elastic nylon to maintain full conductivity, comfort and reliability, while providing rapid and continuous drain of static charge. Two-one megohm resistors are built into the ground cord. Adjustability also simplifies ordering procedures and inventory control by eliminating the need to order and stock several band sizes.



3M™ Fabric Wrist Band 2368

Note: The 3M™ Bands and Cords 2300 Series, 2300VM Series and 2200 Series are not interchangeable. See page 8 for additional information on wrist band and cord combinations.

Product No.	Description
2368	Turquoise Dual Conductor Adjustable Fabric Wrist Band.
2368VM	Turquoise Dual Conductor Adjustable Fabric Wrist Band. (790 only)
2360	Dual Conductor Coiled Cord, 5 ft. (1.5 m) practical length.
2370	Dual Conductor Coiled Cord, 10 ft. (3.0 m) practical length.
2371	Dual Conductor Coiled Cord, 20 ft. (6.0 m) practical length.

Warning:

These products are not to be used in areas where the individual may come in contact with exposed circuitry exceeding 250 Volts AC.

These products are for static control. It will not reduce or increase your risk of receiving electrical shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the 3M Wrist Strap.
- A current limiting resistor(s) is located in these 3M Ground Cords. DO NOT REMOVE. If the resistor(s) become damaged, replace ground cord immediately.

Dual Conductor Metal Wrist Straps for Monitors

The 3M Dual Conductor Metal Wrist Straps 2300 Series are for use exclusively with the Workstation Monitors 724, Wrist Strap Monitor 725 and 3M™ Static Monitor 790. These long lasting metal expansion bands are for use in clean rooms and applications requiring extended band life.

Three sizes are available: small for wrists from 4.5 in. to 6 in. (114 mm to 152 mm) in circumference; medium for wrists from 5.5 in. to 7.25 in. (140 mm to 184 mm); and large for wrists larger than 6.5 in. (165 mm).



3M™ Metal Wrist Strap 2381

Note: The 3M Bands and Cords 2300 Series, 2300VM Series, and 2200 Series are not interchangeable. See page 8 for additional information on wrist band and cord combinations.

Product No.	Description
2381	Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1.5 m) cord. (Small)
2381VM	Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1.5 m) cord. (Small)(790 only)
2382	Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1.5 m) cord. (Medium)
2382VM	Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1.5 m) cord. (Medium)(790 only)
2383	Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1.5 m) cord. (Large)
2383VM	Dual Conductor Metal Wrist Strap. Includes band and 5 ft. (1.5 m) cord. (Large)(790 only)
2384	Dual Conductor Metal Wrist Band. (Small)
2384VM	Dual Conductor Metal Wrist Band. (Small)(790 only)
2385	Dual Conductor Metal Wrist Band. (Medium)
2385VM	Dual Conductor Metal Wrist Band. (Medium)(790 only)
2386	Dual Conductor Metal Wrist Band. (Large)
2386VM	Dual Conductor Metal Wrist Band. (Large)(790 only)
2360	Dual Conductor Coiled Cord, 5 ft. (1.5 m) practical length.
2370	Dual Conductor Coiled Cord, 10 ft. (3.0 m) practical length.
2371	Dual Conductor Coiled Cord, 20 ft. (6.0 m) practical length.



Dual Conductor Thermoplastic Wrist Straps for Monitors

Made to be used in conjunction with the 3M™ Workstation Monitor 724 and the 3M™ Wrist Strap Monitor 725, the 3M™ Dual Conductor Band 4720 offers several unique features to provide high-tech businesses cutting edge equipment at low cost.


The dual conductor wrist band is connected to the 3M Workstation or Wrist Strap Monitor via a 3M™ Dual Conductor Ground Cord 2300 Series. The cords (2360, 2370, and 2371) are sold separately to allow customers the option of purchasing a cord in 5 ft., 10 ft. and 20 ft. lengths respectively.

3M's exclusive "comfort bumps" design on the conductive interior insert provides not only increased contact with the skin, but also air flow between the band and skin, resulting in more comfort for the wearer.

Made of thermoplastic material, the Dual Conductor Wrist Bands 4720 are lightweight and low profile, making reliable contact to the skin, improving employee acceptance while providing an effective grounding device. It is well known that high contact resistance between a wrist band and arm can be attributed to improper fit, dry skin or arm hair. The pliable thermoplastic material of the Wrist Band 4720 conforms to the arm, increasing the amount of contact area. In 3M field trials with the wrist bands, reduced contact resistance between the wrist band and arm were noted. This improvement was also observed when compared to standard metal and fabric wrist bands.

The "zipper" style latching mechanism easily adjusts to any size wrist, effecting a "one size fits all," allowing for a secure and comfortable fit. After adjusting for proper fit, any excess band material is cut off. The wrist band is highly visible, making it easy for supervisors to see that the wrist straps are properly used.

The 3M™ Dual Conductor Wrist Strap Ground Cord is for use exclusively with 3M™ Dual Conductor Wrist Straps. Used in conjunction with 3M's ESD workstation monitors, the 3M Dual Conductor Cord 2300 series features an improved grip that is wider in diameter and easier to grasp when inserting and removing the cord from the remote unit. The terminations at both ends of the cord have been redesigned for a secure fit when plugged into the dual remote.

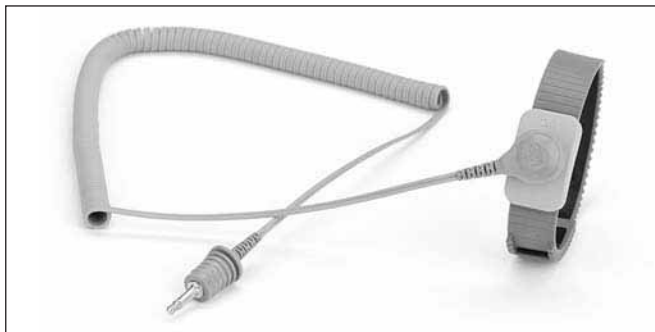

3M™ Wrist Band 4720 with Dual Conductor Wrist Strap Ground Cord 2360

Product No.	Color	Description
4720	Blue	Dual Conductor Wrist band.*

*Ground Cord not included

Product No.	Description
2360	Dual Conductor Coiled Cord, 5 ft. (1.5 m) practical length.
2370	Dual Conductor Coiled Cord, 10 ft. (3.0 m) practical length.
2371	Dual Conductor Coiled Cord, 20 ft. (6.0 m) practical length.
2360R	Dual Conductor Coiled Cord, 5 ft. (1.5 m) practical length, with right angle mono plug connection. (To be used only with 3M monitors)
2370R	Dual Conductor Coiled Cord, 10 ft. (3.0 m) practical length, with right angle mono plug connection. (To be used only with 3M monitors)
2371R	Dual Conductor Coiled Cord, 20 ft. (6.0 m) practical length, with right angle mono plug connection. (To be used only with 3M monitors)
2391	Dual Conductor Coiled Cord, 5 ft. (1.5 m) practical length, with right angle mono plug connection. (To be used with monitors other than 3M monitors)
2392	Dual Conductor Coiled Cord, 10 ft. (3.0 m) practical length, with right angle mono plug connection. (To be used with monitors other than 3M monitors)
2393	Dual Conductor Coiled Cord, 20 ft. (6.0 m) practical length, with right angle mono plug connection. (To be used with monitors other than 3M monitors)



Static Control Workstation Solutions

Dissipative Vinyl Three-Layer Mats and Runners

3M™ Mats and Runners 8200 Series are soft table and floor mats with a unique three-layer construction. The top layer is durable static dissipative vinyl, which has sufficiently low resistance to discharge static-laden conductors, yet will prevent the shorting of pins on the backs of printed circuit boards laid on the mat. The middle layer is a highly conductive scrim that provides the main discharge path to ground, and the bottom layer is static-dissipative foam, providing a durable nonskid cushion. Nonstandard sizes are available on a custom order basis.

Floor Mats 8200 Series

Includes one 15 ft. (4,6 m) 3M™ Ground Cord 3040 and two 3M™ Snap Fasteners 3050 (installed).

Floor Runners 8250 Series


Includes two 15 ft. (4,6 m) 3M Ground Cords 3040 and two 3M Snap Fasteners 3050 to be installed by customer.

Table Mats 8210 Series

Includes two 3M Snap Fasteners 3050 (installed) and one 3M™ Wrist Strap Grounding System 3048. Wrist Straps must be ordered separately.

Table Runners 8260 Series

Includes two 15 ft. (4,6 m) 3M Ground Cords 3040 and two 3M Snap Fasteners 3050 to be installed by user.

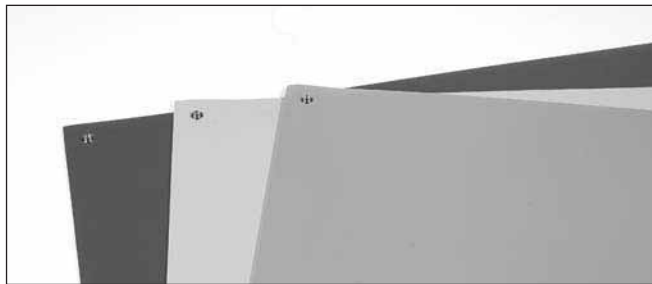

3M™ Mats and Runners 8200 Series

Properties

Property	Typical Value
Material	Top and Bottom Layers - Vinyl
Thickness	0.138 in. (3.5 mm)
Hardness	40 - 50 Shore A
*Resistance	
(Surface to Ground)	$1 \times 10^7 \Omega$
(Surface to Surface)	$4 \times 10^7 \Omega$

* Tested per ESD Association Standard S4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)

Note: Non-standard sizes available on custom order basis up to 50 ft. maximum length.



Product Referral Generator

Static Control Surface Mark

Remover 8001..... pg. 21, 27

Shoe Straps pg. 6-7

Wrist Straps..... pg. 2-5, 14-15

Product No.	Description	Size, ft. (m)
8201	Floor Mat, Brown.	4 x 6 (1.2 x 1.8)
8203	Floor Mat, Gray.	4 x 6 (1.2 x 1.8)
8204	Floor Mat, Blue.	4 x 6 (1.2 x 1.8)
8211	Table Mat, Brown.	2 x 4 (0.6 x 1.2)
8213	Table Mat, Gray.	2 x 4 (0.6 x 1.2)
8214	Table Mat, Blue.	2 x 4 (0.6 x 1.2)
8251	Floor Runner, Brown.	4 x 24 (1.2 x 7.2)
8253	Floor Runner, Gray.	4 x 24 (1.2 x 7.2)
8254	Floor Runner, Blue.	4 x 24 (1.2 x 7.2)
8261	Table Runner, Brown.	2 x 24 (0.6 x 7.2)
8263	Table Runner, Gray.	2 x 24 (0.6 x 7.2)
8264	Table Runner, Blue.	2 x 24 (0.6 x 7.2)
8281	Floor Runner, Brown.	2 x 40 (0.6 x 12.2)
8283	Floor Runner, Gray.	2 x 40 (0.6 x 12.2)
8284	Floor Runner, Blue.	2 x 40 (0.6 x 12.2)
8291	Floor Runner, Brown.	4 x 40 (1.2 x 12.2)
8293	Floor Runner, Gray.	4 x 40 (1.2 x 12.2)
8294	Floor Runner, Blue.	4 x 40 (1.2 x 12.2)



Dissipative Rubber Mats and Runners

3M™ Static Dissipative Rubber Mats and Runners 8800 Series consist of a top layer of static dissipative rubber laminated to a bottom layer of conductive rubber. Both layers are made from vulcanized synthetic rubber, which offers excellent resistance to oil, grease and most common solvents. They offer superior resistance to heat and hot solder as compared to vinyl or olefinic materials. Non-standard sizes are available on a custom order basis.

Floor Mats 8870 Series

Dissipative floor mats include one 15 ft. (4,6 m) 3M™ Ground Cord 3040 and two 3M™ Snap Fasteners 3034 (installed).

Floor Runners 8880 Series

Dissipative floor runners include two 15 ft. (4,6 m) 3M Ground Cords 3040 and five 3M Snap Fasteners 3034 to be installed by user.

Table Mats 8810/8820/8830 Series

Dissipative table mats include two 3M Snap Fasteners 3034 (installed) and one 3M™ Wrist Strap Grounding System 3048.

8840/8850/8860 Series

Dissipative table runners include two 15 ft. (4,6 m) 3M Ground Cords 3040 and five 3M Snap Fasteners 3034 to be installed by the user.



3M™ Static Dissipative Rubber Mat

Product No.	Description	Size, ft. (m)
8810	Table Mat, Gray	2 x 4 (0.6 x 1.2)
8811	Table Mat, Blue	2 x 4 (0.6 x 1.2)
8812**	Table Mat, Green	2 x 4 (0.6 x 1.2)
8830	Table Mat, Gray	3 x 4 (0.9 x 1.2)
8831	Table Mat, Blue	3 x 4 (0.9 x 1.2)
8840	Table Runner, Gray	2 x 24 (0.6 x 7.2)
8841	Table Runner, Blue	2 x 24 (0.6 x 7.2)
8842**	Table Runner, Green	2 x 24 (0.6 x 7.2)
8860	Table Runner, Gray	3 x 24 (0.9 x 7.2)
8861	Table Runner, Blue	3 x 24 (0.9 x 7.2)
8870	Floor Mat, Gray	4 x 6 (1.2 x 1.8)
8871	Floor Mat, Blue	4 x 6 (1.2 x 1.8)
8880	Floor Runner, Gray	4 x 24 (1.2 x 7.2)
8881	Floor Runner, Blue	4 x 24 (1.2 x 7.2)

Non-standard sizes available on custom order basis up to 50 ft. maximum length.

Properties

Property	Typical Value
Material	Top and Bottom Layers - Nitrile™ Rubber
Thickness	0.065 in. (1.7 mm)
Hardness	60 Shore A
*Resistance	
(Surface to Ground)	1 x 10 ⁶ Ω to 5 x 10 ⁶ Ω
(Surface to Surface)	1 x 10 ⁶ Ω to 1 x 10 ⁷ Ω

* Tested per ESD Association Standard S4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)

** Note: New Green mat table/runner identifies work surface as a lead-free area.



Static Control Workstation Solutions

Conductive Floor Mats for Hard Floors

The main purpose of a conductive floor mat or runner is to remove static charge from personnel as they approach work areas. This could include supervisors and parts delivery personnel, as well as the worker who removes his or her wrist strap and momentarily steps away. Floor mats provide significant passive protection in well-traveled assembly areas. Continuous runners extend static protection throughout and between entire areas.

3M™ Floor Mat 1864

Semi-flexible conductive floor mat that contains a rubber filler for resilience. It also has a textured surface for better traction. It includes two 3M Snap Fasteners 3034 (installed) and one 15 ft. (4,6 m) 3M Ground Cord 3040 with a 1 megohm resistor.

Floor Runner 1864R

The 3M™ Floor Runner 1864R is a 50 ft. long runner of the mat material 1864. It includes two 15 ft. (4,6 m) 3M Ground Cords 3040 with 1 megohm resistor, five 3M Snap Fasteners 3034 and one 3M Snap Fastener Installation Tool.

Product No.	Description	Size, ft. (m)
1864	Floor Mat	4 x 6 (1.2 x 1.8)
	0.125 in. (3.2 mm) thick	4 x 8 (1.2 x 2.4)
1864R	Floor Runner	2 x 50 (0.6 x 15.0)
	0.125 in. (3.2 mm) thick	

Conductive floor mats 1864 are black.
Non-standard sizes are available on a custom order basis.

Properties

Property	Typical Value
Material	EVA Copolymer/Rubber
Thickness	0.125 in. (3.2 mm)
Hardness	80-85 Shore A
*Resistance	
(Surface to Ground)	$9 \times 10^2 \Omega$
(Surface to Surface)	$6 \times 10^2 \Omega$
**Resistivity	$10^2 \Omega\text{-cm}$

* Tested per ESD Association Standard S4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)
**Tested per ASTM D 257



3M™ Floor Mat 1864


Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.



Dissipative Hard Laminate Sheets

3M™ Dissipative Hard Laminate Sheets are used where a hard, durable, electrically safe surface is needed, providing a low coefficient of friction to permit heavy objects to slide easily. Controlled conductivity (surface-to-ground) eliminates shock hazard when working on a powered component.

This material is post-formable with normal high pressure laminate process techniques used by furniture makers. Using this technique, a tight 0.5 in. (12.7 mm) radius is possible, which allows installation without seams in corners and over rounded edges when forming parallel to sanding lines. The laminate can provide a comfortable rounded front on which personnel can rest their arms. It is resistant to common solvents and to hot solder droppings.

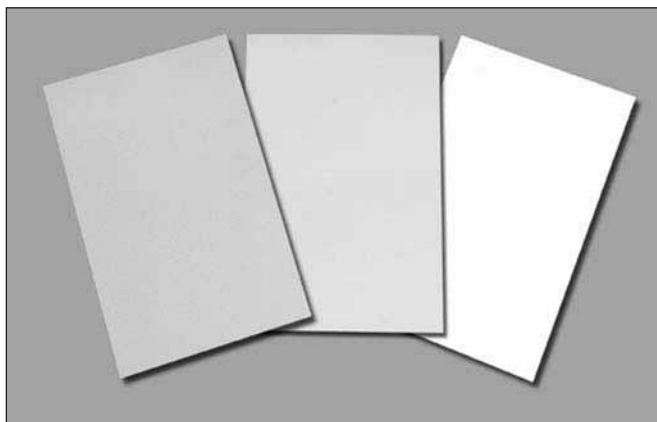

3M™ Dissipative Hard Laminate Sheets

Note: For consistent static charge dissipation from rigid, conductive flat-bottomed totes and trays, use of a pad or mat of 3M Dissipative Vinyl material 8200 in conjunction with this static-protective hard laminate is suggested, especially in areas where relative humidity often drops below 30%.

3M™ Static Dissipative Rigid Worksurface 8300 Series have the high abrasion resistance of a laminate, yet are as easy to install as table mats. The nonglare surface also resists staining, scorching and common solvents. All edges and corners are rounded, and the laminate comes ready to use with two factory-installed snap fasteners, and one 3M™ Grounding System 3048 for wrist strap/table mat.



3M™ Rigid Worksurface 8300 Series

Product No.	Color	Size, ft. (m)	
8360	Beige	4 x 8	(1.2 x 2.4)
		3 x 12	(0.9 x 3.7)
		5 x 12	(1.5 x 3.7)
8365	Gray	4 x 8	(1.2 x 2.4)
		3 x 12	(0.9 x 3.7)
		5 x 12	(1.5 x 3.7)
8375	White	5 x 12	(1.5 x 3.7)

Non-standard sizes and colors are also available, subject to minimum order quantity.

Properties

Property	Typical Value
Thickness	0.037 in. (0.94 mm)
Hardness	
Abrasion resistance:	> 1500 cycles Tabor Wheel 32
*Resistance	
(Surface to Ground)	7 x 10 ⁶ Ω
(Surface to Surface)	6 x 10 ⁷ Ω

* Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M Test Kit 701 for Static Control Surfaces (Megohmmeter)



Product Referral Generator

Wrist Straps.....	pg. 2-5, 14-15
Monitors.....	pg. 8-13
Static Control Surface Mark Remover 8001	pg. 21, 28

Product No.	Color	Size, in. (cm)	
8343	Beige	0.125 x 24 x 36	(0.32 x 61.0 x 91.0)
8344	Gray	0.125 x 24 x 36	(0.32 x 61.0 x 91.0)
8353	Beige	0.125 x 24 x 48	(0.32 x 61.0 x 122.0)
8354	Gray	0.125 x 24 x 48	(0.32 x 61.0 x 122.0)



Product Referral Generator

Static Control Surface Mark Remover 8001	pg. 21, 28
Dissipative Rubber Mats/Runners 8800 Series	pg. 17
Static Conductive Floor Tile 8400 Series	pg. 64-65



Static Control Workstation Solutions

Workstation Grounding Kits

Each 3M™ Workstation Grounding Kit provides the basic items needed to create a static-safe work environment. They include a floor mat, table mat, adjustable wrist strap with grounding cord and accessories to properly connect all of the kit components.

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life. Not recommended for use with chairs that have wheels.

Product No.	Description	Size, ft. (m)
802X	Workstation Grounding Kit includes: Table Mat	2 x 4 (0.6 x 1.2)
803X	Floor Mat	4 x 6 (1.2 x 1.8)
3040	Ground Cord	15 (4.6)
3048	Grounding System for Wrist Strap/Table Mat	
2214	Adjustable Wrist Strap	

Product No.	Description
8021	Brown Table and Floor Mat, 3-layer construction.
8023	Gray Table and Floor Mat, 3-layer construction.
8024	Blue Table and Floor Mat, 3-layer construction.
8031	Brown 3-layer Table Mat, Black Conductive Floor Mat.
8033	Gray 3-layer Table Mat, Black Conductive Floor Mat.
8034	Blue 3-layer Table Mat, Black Conductive Floor Mat.

Workstation Grounding Kit 8020 Series

The 3M Workstation Grounding Kits 8020 provide the complete static protection offered by all the 3M kits. Both the 3M™ Mats and Runners 8200 Series are made from our soft three-layer static dissipative material.

Workstation Grounding Kit 8030 Series

These kits contain two different types of static control mats. The table mat is made of the soft three-layered, static dissipative material 8200, while the 3M™ Floor Mat 1864 is of the more rigid, conductive material.



Product Referral Generator

Test Kit 701 pg. 24, 50
Wrist Strap Workstation Monitor 724 pg. 10



3M™ Workstation Grounding Kit 8034



3M is pleased to introduce a revolutionary line of non-flammable, high-performance cleaners: 3M™ Novec™ Aerosol Electronic Degreaser, Contact Cleaner and Flux Remover. Novec Aerosol Cleaners are based on high-performance proprietary formulations.

With a favorable environmental profile, Novec Aerosol Cleaners are non-ozone depleting and contain no nPB, HFCs or HAPS. These high-performing products have a wide margin of safety for use in intended application and are a sustainable alternative to HCFC-141b.



3M™ Novec™ Aerosol Cleaners



Aerosol Cleaners

	Novec™ Contact Cleaner	Novec™ Electronic Degreaser	Novec™ Flux Remover
Particulate	+++	+++	+++
Krytox® Oil	+++	++	++
Silicone Oil	+	+++	+++
Mineral Oil	+	+++	+++
Motor Oil	+	+++	+++
Lithium Grease	-	++	++
Wheel Bearing Grease	-	++	++
Hydraulic Fluid	+	+++	+++
Noncorrosive Coating	-	+++	+++
RA Flux	-	++	+++
RMA Flux	-	++	+++
R Flux	-	+++	+++
Plastic Compatibility	+++	++*	++*

Rating
 +++ Excellent
 ++ Very Good
 + Moderate
 - Not Recommended
 * Do not use on ABS, PS, polycarbonate or acrylics.

Worksurface Cleaning Products

The 3M™ Static Control Surface Mark Remover 8001 is an extra-strength fluid that removes ordinary dirt and grime as well as difficult spots and stains from all types of static control surfaces, such as table mats, floor mats, hard-laminate benchtops, portable field-service kit work surface, etc. Unlike many cleaning products, the 3M Static Control Surface Mark Remover 8001 is not corrosive, per FTMS 101C, Method 3005, and leaves no tacky residue that attracts dirt, attacks delicate parts, or increases the contact resistance of the surface. It is a clear, colorless, homogeneous, water-based liquid that contains detergents, conditioners and other cleaning additives and has a fresh, clean scent.

3M laboratory tests have proven the cleaner to be an excellent topical antistat, maintaining a consistent surface resistivity (1×10^{11} ohms/square) over extended periods in both normal (55% RH) and dry (13% RH) environments. Simply spray on any washable surface and wipe off with a clean cloth or sponge—no rinsing required. The cleaner is designed to be used full-strength and supplied in handy quart spray bottles.

Product No.	Description
8001	Surface Mark Remover
	Size
	1 quart spray (32 oz.)
	Shelf life two years



3M™ Surface Mark Remover 8001

3M™ Clean Walk Mats 5830 remove dirt and contaminants from shoe soles, wheels and other passing objects on contact. When the top sheet becomes soiled, it can be peeled back to reveal a clean adhesive sheet underneath.



3M™ Clean Walk Mat 5830

Product No.	Description
5830	Clean Walk Mats, 30 mats per pad.
	Size, in. (cm)
	18 x 36 (45.7 x 85.7)
	18 x 45 (45.7 x 114.3)
	25 x 45 (63.5 x 114.3)



Static Control Workstation Solutions

Field Service Kits

Sensitive microelectronic components can be damaged, even destroyed, by one ever-present enemy – static electricity. Electronic equipment is especially susceptible to static electricity during servicing.

Static-dissipative products manufactured by 3M are designed to provide protection at a variety of field service sites, from typical office environments to remote telephone terminals. The standard field service kit quickly and reliably removes any static charge on the technician and provides a durable, static-free surface upon which to lay parts. The

lightweight version offers the same protection in a flexible, compact package. The telephone terminal service kit is especially designed to be installed at remote telephone switches or CEVs to ensure convenient static protection on site.

Practicing proper static control in the field can save time, money, and aggravation for both your customers and your company. Enable your technicians to do the job right the first time – safely and productively – with a static-dissipative portable field service kit from 3M.

Portable Field Service Kit

The 3M™ Portable Field Service Kit 8501 provides effective static protection in a compact package for the electronics field technician. The entire kit folds to a size that fits easily into most tool cases. Two pockets sewn into the worksurface provide storage for the cords.



3M™ Field Service Kit 8501

Product No.	Description
8501	Static-Dissipative Portable Field Service Kit. Kit includes: <ul style="list-style-type: none"> • Static-Dissipative Worksurface 0.021 in. x 22 in. x 24 in. (0.53 mm x 56 cm x 61 cm) • 3M™ Ground Cord Assembly 3051 • 3M™ Alligator Clip 3038 • 3M™ Adjustable Wrist Band 2204

Custom logo imprinting on the worksurface is available.

8501 Properties

Typical Property	Value
Resistance: (Surface-to-ground)	$1 \times 10^6 \Omega$ to $1 \times 10^9 \Omega$

Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M™ Test Kit 701 for Static Control Surfaces (Megohmmeter).

The 3M™ Static-Dissipative Field Service Kit 8502 is a specially designed static-dissipative kit for installation in remote, unattended telephone switching enclosures.

The worksurface has a strip of 3M™ Hook and Loop Fastener Tape stitched to the back so it can be left suspended from the permanently mounted instruction sign.



3M™ Field Service Kit 8502

Product No.	Description
8502	Static-Dissipative Field Service Kit for remote, unmanned telephone switching sites. Kit includes: <ul style="list-style-type: none"> • Static-Dissipative worksurface 0.021 in. x 8.75 in. x 24 in. (0.53 mm x 22.2 cm x 61 cm) with two pockets • Two 5 ft. (1.5m) coiled ground cords; one for mat, one for wrist band • 3M™ Adjustable Wrist Band 2204 • Static Caution Sign • Plastic Instruction Sign

8502 Properties

Typical Property	Value
Resistance: (Surface-to-ground)	$1 \times 10^6 \Omega$ to $1 \times 10^9 \Omega$

Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M™ Test Kit 701 for Static Control Surfaces (Megohmmeter).



Portable Field Service Kit

The 3M™ Portable Field Service Kit 8505 is a small, lightweight kit that offers the same level of static control as the full-sized 3M™ Field Service Kit 8501, yet is small enough to fit in a shirt pocket.



3M™ Field Service Kit 8505

Product No.	Description
8505	<p>Lightweight Portable Field Service Kit.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> • Static-Dissipative Worksurface with Pocket 0.015 in. x 15 in. x 20 in. (0.38 mm x 38 cm x 51 cm) • 3M™ Adjustable Wrist Band 2204 • Lightweight Heavy-Duty Coiled Ground Cords: 3M™ Wrist Strap Ground Cord 2240, 5 ft. (1.5 m) 3M™ Extension Ground Cord 2243, 5 ft. (1.5 m) 3M™ Worksurface Ground Cord 3063, 5 ft. (1.5 m) • 3M™ Alligator Clip 3038

Custom logo imprinting on the worksurface is available.

8505 Properties

Typical Property	Value
Resistance: (Surface-to-ground)	$1 \times 10^5 \Omega$ to $1 \times 10^9 \Omega$

Tested per ESD Association Standard 4.1 at 72°F, 50% RH using 3M™ Test Kit 701 for Static Control Surfaces (Megohmmeter).

Portable Field Service Kit

The 3M™ Field Service Kit 8507 with a 3M™ Wrist Strap Monitor 725 bundles together two static control products to give a field technician the same continuously monitored, static protected working environment as that enjoyed by workers in a manufacturing facility.



3M™ Field Service Kit 8507

Product No.	Description
8507	<p>Portable Field Service kit includes Wrist Strap Monitor 725 and Dual Conductor Wrist Strap</p> <p>Kit includes:</p> <ul style="list-style-type: none"> • Static-Dissipative Worksurface, foldable, 0.021 in. x 22 in. x 24 in. red with gray cotton edging. Two pockets, each 8 in. x 11 in. ground snap. • 3M™ Wrist Strap Monitor 725, 2.5 in. x 2.6 in. x 1.1 in., black. Battery-powered, 9V (not included). Ground cord, 6 ft., with ground clip. Ground snap on unit to connect to the worksurface. • 3M™ Dual-Conductor Adjustable Fabric Wrist Band 2368. • 3M™ Dual-Conductor Coiled Cord 2370, 10 ft.



Static Control Workstation Solutions

Test Kits for Static Control Surfaces

The 3M™ Test Kit 701 contains a lightweight, user-friendly megohmmeter plus all of the components needed to make testing mats and other surfaces simple and accurate. All of the items are packaged in a foam-lined carrying case.

The kit meets the intent of ANSI/ESD Standard 4.1, “Worksurfaces – Resistive Characterization.” ANSI/ESD Standard 7.1, “Floor Materials – Resistive Characterization of Materials,” and MIL-PRF-87893, “Workstation, Electrostatic Discharge (ESD) Control,” for auditing purposes. The meter has separate scales and test settings for measuring surface-to-ground and surface-to-surface resistance at two prescribed test voltages (10V and 100V), and system continuity. The easy to read scales are both color-coded and numbered.



3M™ Test Kit 701



Product Referral Generator










Floor Mats/Runners 8200 Series.....	pg. 16
Dissipative Rubber Mats/Runners 8800 Series.....	pg. 17
Static Conductive Floor Tile 8400 Series.....	pg. 64-65

Product No.	Description
701	Test Kit for Static Control Surfaces. (Certified and non-certified) Kit contains: <ul style="list-style-type: none"> • 1 Megohmmeter 12 oz. (340 g) 1.8 x 3.3 x 4.6 in. (4.57 x 8.38 x 11.68 cm) • 2 Test Weights 5 lbs. (2.27 kg) each • 2 Test Leads, 10 ft. (3 m) each • 1 Insulated Bulldog Clip • 1 Alligator Clip • 1 Continuity Test Plate • 2 Batteries (22.5V and 1.5V) • 1 Operator's Manual • 1 Molded Carrying Case
701-L	Test Leads
701-M	Megohmmeter only
701-W	5 lb. Test Weight

Test Kit Properties

Product	Item	Typical Properties
Kit	Weight:	14 lb. (6.35 kg)
	Case Dimensions:	5.125 in. x 10 in. x 13.5 in. (13.02 cm x 25.4 cm x 34.29 cm)
	Case Material:	Blow-molded, high density polyethylene with foam inserts
	Case Color:	Gray
Meter	Weight:	12 oz. (0.34 kg)
	Dimensions:	1.8 in. x 3.3 in. x 4.6 in. (4.57 cm x 8.38 cm x 11.68 cm)
	Resistance Ranges:	
	Continuity Test Mode	0 – 10M Ω (internal R=500 K Ω)
10V Surface Test Mode	10 ⁵ – 10 ¹¹ Ω (internal R=2 M Ω)	
100V Surface Test Mode	10 ⁵ – 10 ¹¹ Ω (internal R=2 M Ω)	
Weights	2 Test Weights:	5 lb. (2.27 kg) each
	Dimensions:	Diameter – 2.5 in. (6.35 cm) Height – 5.06 in. (12.85 cm); includes handle and pad
	Pad Material:	Conductive silicone rubber
	Pad Dimensions:	Diameter – 2.5 in. (6.35 cm) Thickness – 0.25 in. (0.64 cm)
Leads	Length:	10 ft. (3.05 m)
	Wire Size:	18 gauge
	Insulation:	Silicone rubber
	Diameter:	0.125 in. (0.32 cm)
Power Supply	Batteries (2):	22.5 volt (Eveready #505 or equivalent) and 1.5 volt (AA).













	Product No.	Description
	723	Accessory Belt Clip to be used with the 3M™ Wrist Strap Monitor 725.
	724P	Power supply for 3M™ Wrist Strap Workstation Monitor 724 and 3M™ Static Monitor 790.
	724VK	Verifies the resistance range of the Workstation Monitor 724.
	725VK	Verifies the resistance range of the 3M™ Wrist Strap Monitor 725.
	732	Replacement Remote Input Jack. 6 ft. (1.8 m) long cord. To be used with Workstation Monitor 724.
	733	Remote Splitter Kit. 6 ft. (1.8 m) long cord. To be used with Workstation Monitor 724.
	740P	Power Supply for 3M™ Wrist Strap and Footwear Tester 740.
	746P	Power Supply for 3M™ Wrist Strap Tester 746.
	790VK	Verification Kit. One 5 ft. Dual Conductor Cord 2360, one test wrist band socket assembly, and one two-wire male connector with 24 in. lead wire.










Static Control Workstation Solutions

Phone: 1-800-328-1368 or www.3M.com/electronics

	Product No.	Description
	2380	Monitor/Table Mat Replacement Cord, 6 ft. (1.8 m), with 10 mm snap. Extends from the 3M™ Wrist Strap Workstation Monitor 724 to the static control worksurface to be monitored. This cord does not have a resistor molded into the snap fastener cap.
	2389	Monitor/Table Mat Interconnect Cord, 10 ft. (3 m), with 10 mm snap. A straight cord with male snap fasteners at each end, and no resistors. Used to interconnect two monitored worksurfaces.
	3033	Snap Fastener, male, 0.125 in. (3.2 mm) hole, 10 mm diameter. For mats and runners.
	3034	Snap Fastener, female, 0.125 in. (3.2 mm) hole, 10 mm diameter. For 3M™ Mats and Runners 1800/8800 series.
	3037	Insulated Bulldog Clip. Fits standard banana plug.
	3038	Uninsulated Alligator Clip. Fits standard banana plug.
	3040	Ground Cord, 15 ft. (4.6 m), with 10 mm snap. Molded-in male snap fastener with integral 1-megohm resistor on one end, solderless terminal on other. Connects all 3M™ Static Control Mats and Runners to building ground.
	3041	Grounding Kit for 3M™ Static Protective Hard Laminate includes #10 screw, lock washer, #10 nut, lock washer wing nut, #10 self-tapping screw and one 10 ft. (3.0 m) ground cord. Ground cord has a 1-megohm resistor.
	3042	Wrist Strap Grounding System. Grounds two single conductor wrist straps and conveniently mounts beneath the edge of most work benches. Comes complete with 10 ft. (3.0 m) ground cord.
	3043	Interconnect Cord 5 ft. (3.5 m), with 10 mm. Snap molded-in male snap fastener at each end. Connects all 3M™ Static Control Mats and Runners to each other. Ground cord has a 1-megohm resistor.



	Product No.	Description
	3047	Common Point Grounding System, 10 ft. (3m) to ground workstation components. Single-row, six-terminal strip, protective cover, three cable clips. Ground cord has a 1-megohm resistor.
	3048	Grounding System for 3M™ Wrist Strap/Table Mat. Easily snaps onto mats and runners, (10 mm snap); grounds two single conductor wrist straps. Comes complete with ring connector and 15 ft. (4.6 m) ground cord. Ground cord has a 1-megohm resistor for mat connection only.
	3050	Snap Fastener, female, 10 mm diameter. For 3M™ Table and Floor Mats and Runners 8200 Series.
	3051	Ground Cord with center snap for standard field service kits. Wrist strap cord section 10 ft. (3.0 m) and ground cord section 5 ft. (1.5 m). Each contains a 1-megohm resistor.
	3057	Monitor Stand-By Jack. Allows operator to disconnect a ground cord from the wrist band and leave the workstation without deactivating the 3M™ Wrist Strap Workstation Monitor 724 or 3M™ Static Monitor 790.
	8001	Static Control Surface Mark Remover. One quart (32 oz.) trigger-spray bottle. An extra-strength product for removing dirt and stains from all types of static control surfaces, including table and floor mats, hard laminate bench tops and portable field service kits. It will also remove difficult grime from epoxy or tile flooring. Used full strength, it is a clear, colorless, water-based liquid that leaves no tacky or corrosive residue. Read all Health Hazard Precautionary and First Aid statements found in the Material Safety Data sheet and/or product label prior to handling or using. Refer to www.3M.com to obtain copy of MSDS.
		Revolutionary line of non-flammable, high-performance cleaners: 3M™ Novec™ Aerosol Electronic Degreaser, Contact Cleaner and Flux Remover. Novec Aerosol Cleaners are based on high-performance proprietary formulations. With a favorable environmental profile, Novec Aerosol Cleaners are non-ozone depleting and contain no nPB, HFCs or HAPS. These high-performing products have a wide margin of safety for use in intended application and are a sustainable alternative to HCFC-141b.



Static Control Workstation Solutions

High Performance Scotch-Brite Cloth

The 3M™ Scotch-Brite™ High Performance Cloth 2011 is an efficient cleaning tool consisting of microfibers in a unique knit pattern. The Scotch-Brite High Performance Cloth is specifically designed with a unique combination of bi-component microfibers and knit construction. This combination provides excellent dust, oil, and water pickup with minimal linting. The bi-component aspect of the microfibers allows for both oil and water absorption while the microfiber's ribbon-like shape provides the maximum surface area for the collection of dust, oil, and water. The unique knit pattern of tufts and valleys allows both small and large particulates to be trapped within the Scotch-Brite High Performance Cloth. The combination of microfiber and knit construction provide a versatile non-scratching tool allowing the Scotch-Brite Cloth to be used on a wide variety of substrates including delicate surfaces.

The Scotch-Brite High Performance Cloth may be used dry or damp, with or without cleaning chemicals.



3M™ Scotch-Brite™ High Performance Cloths 2011

Physical Characteristics

Property	Typical Value	Test Method
Size:	12.6 in. X 14.2 in. (32 cm X 36 cm)	HCC-TM-69
Thickness	0.062 in. (1.57 mm)	HCC-TM-69
Weight:	1.09 oz. (30.8 g)	HCC-TM-69
Fiber Type	Polyester and nylon	
Tuft density	37 per square cm	HCC-TM-86
Water absorption	7.2 g water per g wipe	HCC-TM-73
Oil absorption	7.1 g oil per g wipe	HCC-TM-73
Artificial Sebum removal (Artificial skin oil)	98% gloss recovery	HCC-TM-90
Drag (dry, kinetic coefficient)		HCC-TM-75 (modified)
	Glass 0.85	
	Formica 0.41	
Tear resistance (6400 g pendulum)		HCC-TM-75
	Machine Direction 5570 gram force	
	Cross Direction 4290 gram force	
Resistant to	Household Ammonia Household Bleach Household Cleaner/Degreaser Vinegar Mineral Oil Vegetable Oil	
Linting	Minimal	
Laundrying	Laundryable to 95°C (200°F)	

Product No.	Description
2011	50 Scotch-Brite™ High Performance Cloths per case.
	Examples of Intended Use
	Fingerprint removal from glass
	Removing glaze and polish from painted metals
	Polishing furniture
	Cleaning and polishing brass
	Dust removal
	Standard Size
	12.6 in X 14.2 in (32 cm X 36 cm)
	Colors
	Blue
	Green
	Red
	Yellow
	White

Note: The 3M Scotch-Brite High Performance Cloth 2011 does not have static dissipative properties.



Overhead Air Ionizer

Using steady-state DC technology, the 3M™ Overhead Air Ionizer 990 enables consistent static control coverage. With its overhead mounting system, the Air Ionizer 990 does not compromise valuable space on the workbench, allowing for neutralization of static charge. The ionizer's steady-state DC ion emission enables fast discharge with low air-flow, providing a more comfortable work environment for operators. Emitter points are placed behind the fan to eliminate field-induced charge and to ensure a homogeneous mixture of ionized air. Also featured in the Air Ionizer 990 are open-cell foam filters on fan intakes that protect the internal components from environmental contamination.

Overhead Air Ionizer 990

Electrical Specifications

Ion Emission and Balance*	Steady-state \pm DC; Self-balancing to within $< \pm 20$ V at 24 in. (61 cm)
Emitter Points	0.012 in. diameter tungsten wire, internally shielded
Discharge Time*	Ionizer will discharge a charged plate from 1000 volts to 100 volts in ten (10) seconds (± 1 second) at 24 in. (61 cm) directly below fans
Air Flow Volume	112 CFM (per fan, free-air typical)
Air Filters	Replaceable open-cell foam
Operating Environment	
Temperature	59°F-95°F (15°C-35°C)
Humidity	15%-55% RH, non-condensing
Other Conditions	Product should be used in relatively clean indoor environments
Coverage Area	2 ft. x 3 ft., typical, directly under blower
Audible Noise*	58 dB, fans at high speed
Input Power	100-240 VAC \pm 10%, 50/60 Hz, 40 watts max; Input current: 0.4 amps max
Controls	Power/fan speed rocker switch: High/Off/Low settings
Indicators	Power on: green LED; Power Supply Failure: red LED
Ozone Level	< 0.05 ppm; 24 hr. accumulation


* Measurements taken at high fan speed.

Physical Specifications

Chassis	Aluminum with epoxy-polyester powder coat
Mounting	Four 1 1/8 in. S-hooks provided
Dimensions	4 in. H x 6 in. W x 36 in. L (10.16 x 15.24 x 91.44 cm)
Weight	8 lbs. (3.6 kg)
Certifications	C-TUV-US, CE, CB, C-TICK

Product No.	Description
Accessories 990F	Foam Filters, two per carton

Overhead Ionizer 990 Test Position

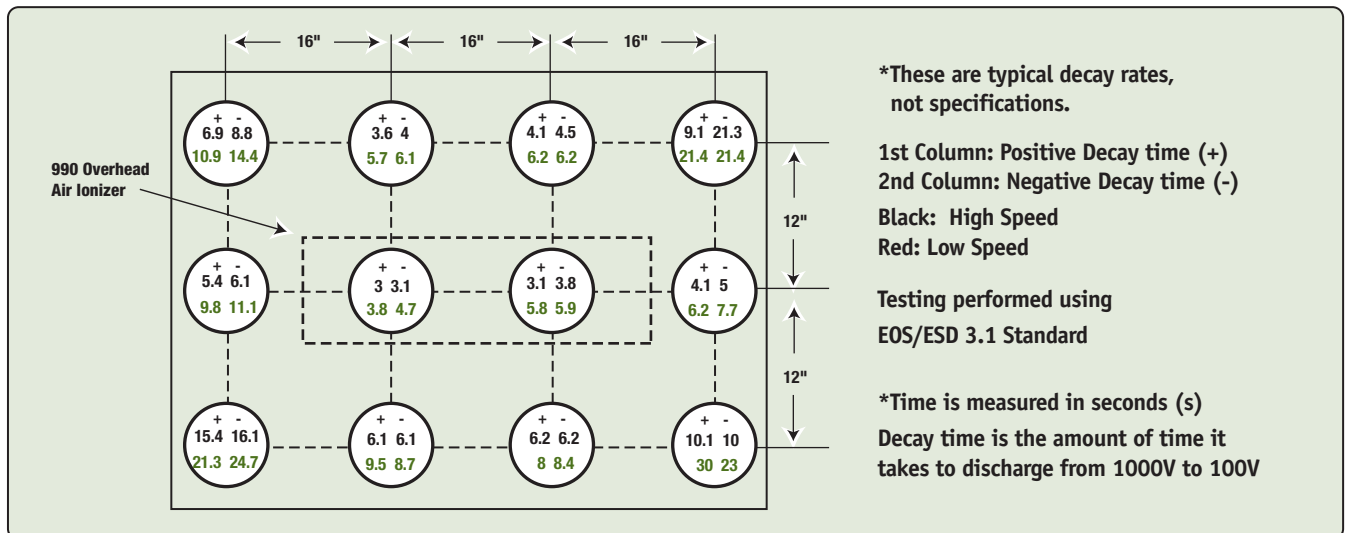



Static Control Workstation Solutions

Ionized Air Gun

The 3M™ Ionized Air Gun 980/980E is an excellent tool for blowing particulate contamination off of any surface. It releases a balanced stream of compressed ionized air that neutralizes the static charge that can hold particulates to a surface. The loose particles can then be easily blown away. Patented technology ensures balanced ionization for consistent control of surface charges. The air gun does not need adjustment and requires very little maintenance.



3M™ Ionized Air Gun 980



The 3M Air Gun 980 is a multi-component device that consists of a hand unit, an air hose and a mounting console. Compact and lightweight, the console for the unit can be mounted anywhere on the workstation for easy access. It connects to any supply of clean, dry air or nitrogen, and an internal disposable filter collects particles from the air supply. The low-voltage electrical feed from the console to the hand unit is incorporated into the 7 ft. (2.1 m) light, flexible air hose. The gun itself is very lightweight and ergonomically designed for long-term user comfort and efficient operation. The console, gun and air hose are all made of static-dissipative, ESD-safe materials.

The 3M Air Gun 980 operates from 100/120 AC power; the 3M™ Air Gun 980E is a 230V version for European use.

Product No.	Description	
980	Ionized Air Gun AC 100/120V 50/60 Hz	
	Hand unit 8.0 in. x 3.0 in. x 1.0 in. (20.3 cm x 7.6 cm x 2.5 cm)	
	Construction	Dissipative rigid polycarbonate
	Weight	12.0 oz (341 g) with 7 ft. air hose
	Emitter points	Tungsten alloy
	Air Hose Construction	Dissipative flexible polyurethane
	Size	7 ft. long, 0.38 in. OD
	Filter efficiency	99.9% for 0.1 micron particle size
	Operating Environment Temperature	59°F-95°F (15°C-35°C)
	Humidity	15%-55% RH, non-condensing
Other Conditions	Product should be used in relatively clean indoor environments	
980E	Console 8.5 in. x 3.0 in. x 1.6 in. (21.6 cm x 7.6 cm x 4.1 cm)	
	Ionized Air Gun – European version AC 230V ~ 50/60 Hz	
980E	Hand unit 8.0 in. x 3.0 in. x 1.0 in. (20.3 cm x 7.6 cm x 2.5 cm)	
	Console 8.5 in. x 3.0 in. x 1.6 in. (21.6 cm x 7.6 cm x 4.1 cm)	

Product No.	Description
Accessories	
980F	Replacement Air Filters (4 pack of 3)
980T	Replacement Nozzle Tip
960X/980X	Replacement Wall Transformer, 120V
980E-X	Replacement Wall Transformer, 230V



Benchtop Air Ionizers

The use of ionized air in electronics work environments will remove the build up of potentially damaging static charges. Air ionizers are primarily used to control static charge on nonconductive materials. The 3M™ Benchtop Air Ionizer 963 Series blanket the benchtop with ionized air to help prevent static from damaging sensitive electronics.

Features

- Two versions available: the Benchtop Air Ionizer 963 operates using AC 120V power, and the Benchtop Air Ionizer 963E from DC 24V power supplied by an included universal power transformer (power line cord not included).
- Fast neutralization of static charges on nonconductive objects. < 1 second at 1 ft. (30 cm) distance using ANSI/ESD S3.1 test procedure.
- Maintains equal balance of positive-negative ions
- Two-speed fans
- Static-dissipative housing prevents static charge build-up on the surface of the housing, a common problem with ionizers. "ESD-safe" design allows the ionizer to be part of your overall static-safeguarded electronic workstation.
- UL, C-UL, NOM certification. CE-marked.

Product No.	Description
963	Benchtop Air Ionizer, including ionizer, Operator's Manual, and power cord; 120VAC
963E	Benchtop Air Ionizer, including ionizer, Operator's Manual, and power transformer, 100VAC-240VAC



3M™ Benchtop Air Ionizer 963



Product Referral Generator

- Floor Mats/Runners 8200 Series pg. 16
- Dissipative Rubber Mats/Runners 8800 Series pg. 17
- Air Ionizer Test Kit 718A..... pg. 33

Property	Typical Values	
	963	963E
Power Ratings	AC 120V 60 Hz 0.20 A 20 W	DC 24V 0.5A 10W
Power Inlet	IEC 320 Socket	Mini DIN socket
Power Transformer	-	Input: AC 100V-240V, 0.4A, 50/60 Hz Into IEC320 Socket. Output: DC24V, 0.5A 3' (0.9M) cord with Mini DIN plug
Power Outlet Cord	6 ft. (1.8 m) cord with IEC 320 and NEMA 5-15 plugs	Not included
Dimensions (w/mounting base)	7.0 in. W x 9 in. H x 4 in. D 18 cm W x 23 cm H x 10 cm D	7.0 in. W x 9 in. H x 4 in. D 18 cm W x 23 cm H x 10 cm D
Weight	2.5 lb. (1.1 kg)	2.5 lb. (1.1 kg)
Air Flow		
Low Speed		
Feet per Minute	200 fpm (1.0 m/s)	100 fpm (0.5 m/s)
Standard Cubic Feet per Minute	56.8 scfm	37.3 scfm
High Speed		
Feet per Minute	370 fpm (1.8 m/s)	300 fpm (1.5 m/s)
Standard Cubic Feet per Minute	105 scfm	112 scfm
Operating Environment		
Temperature	59°F-95°F (15°C-35°C)	59°F-95°F (15°C-35°C)
Humidity	15%-55% RH, non-condensing	15%-55% RH, non-condensing
Other Conditions	Product should be used in relatively clean indoor environments	Product should be used in relatively clean indoor environments
Static discharge time * @ 1 ft. (30 cm)	< 1 second	< 1 second
Offset Voltage	±15V	±15V
Certifications and approvals	UL, C-UL, NOM	UL, C-UL, NOM, CE
Warranty	1-year	1-year

* When tested according to ANSI/ESD S3.1-1991 at high fan speed.



Static Control Workstation Solutions

Mini Air Ionizer


The 3M™ Mini Air Ionizer 960 is a small and versatile blower available for equipment or local area ionization. Its small size makes it ideal for use in those situations where space is at a minimum. Possible applications include in or around electronic product equipment, inside OEM equipment, or on ESD workstations.

The Mini Air Ionizer 960 generates a well-balanced flow of ionized air particles, which neutralizes any stray electrostatic buildup on a surface. Charges are dissipated in seconds and the possibility of a damaging electrostatic discharge (ESD) event is minimized. The ionizer also maintains a reasonably balanced flow ($\pm 20V$) of ionized air.

The unit runs off of low-voltage 24 VAC power, that can be supplied by the 3M™ Wall Transformer 960X (sold separately). Included with the ionizer are a mounting bracket and a 3ft. telephone cable (with modular plugs) to connect the ionizer to the Wall Transformer 960X.

Features

- Steady-state DC ion emission for efficient ion delivery
- Intrinsically balanced - no adjustment necessary
- Small/compact design utilizes very little work bench space
- UL/C-UL/CE for global acceptance

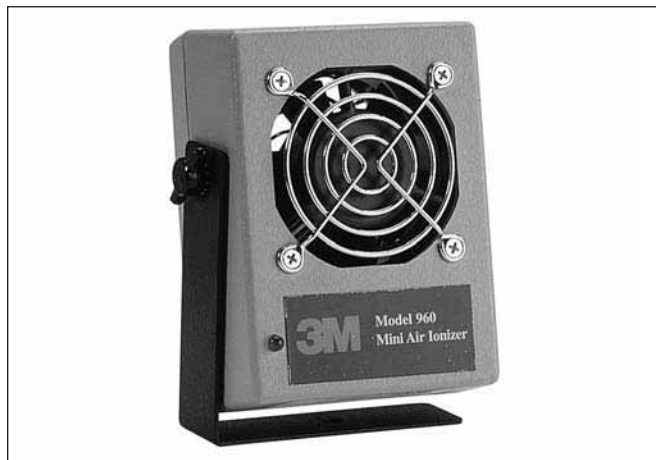

3M™ Mini Air Ionizer 960



Product No.	Description
960	Mini Air Ionizer
960X/980X	Wall Transformer

Mini Air Ionizer 960

Item	Typical Properties
Input Voltage	AC 24V
Power	5.5 watts
Power Input Connection	RJ-11 socket
Size	4.5 in. (H) x 3.3 in. (W) x 2 in. (D) (including bracket) 11.5 cm x 8.4 cm x 5.1 cm
Weight	0.75 lb.
Air Flow Velocity	(@1 ft. in front of grille): 300 ft./min.
Air Flow Volume	22 scfm
Operating Environment	
Temperature	59°F-95°F (15°C-35°C)
Humidity	15%-55% RH, non-condensing
Other Conditions	Product should be used in relatively clean indoor environments
Certifications	UL, C-UL, CE
*Offset Balance @ 1 ft.	$\pm 20 V$
*On Center Discharge Times	@ 1 ft. <4 seconds @ 2 ft. <10 seconds @ 3 ft. <18 seconds @ 4 ft. <28 seconds

*Testing was performed with a charged plate monitor in accordance with ionization standard ANSI/ESD 3.1 - 1991.

Wall Transformer 960X/980X (sold separately)

Item	Typical Properties
Input	AC 120V, 50/60 Hz, 270 mA
Output	AC 24V, 1.0 A through RJ-11 socket connector
Dimensions	3.2 in. (H) x 2.6 in. (W) x 1.9 in. (D) 8.1 cm x 6.6 cm x 4.8 cm
Weight	16 oz.
Certifications	UL

Note: One transformer will supply four Mini Air Ionizers 960.



Air Ionizer Tester/Field Meter and Charger

Static Sensor

The 3M™ Static Sensor 718 is an easy-to-use, hand-held instrument designed to measure static voltages on objects and surfaces, arising from electrostatic charge buildups. This instrument can play a valuable role in an organization's ESD-control program by helping the user locate and quantify ESD trouble-spots.

Features

- Small-size, lightweight, conductive plastic housing
- Membrane switches for Power, Range/Zero, and Hold functions
- Digital, LCD (liquid-crystal) display is easy to read and updates quickly
- Ranging systems assist user in making quick and easy measurements
- Measurements accurate to 5%
- Output jack available for continuous measurements



3M™ Static Sensor 718

Air Ionizer Test Kit

The 3M™ Air Ionizer Test Kit 718A, when used in conjunction with the Static Sensor 718, can be used for periodic verification of air ionizer performance. The unit consists of a charge plate and a charger.



3M™ Air Ionizer Test Kit 718A

Product No.	Description
718	Static Sensor, including meter, Operator's Manual, and Certificate of Performance verification. Available in certified.
718A	Air Ionizer Test Kit, including charge plate assembly, charger, Operator's Manual, and Certificate of Performance verification.

Static Sensor 718 Physical Characteristics

Item	Typical Properties
Dimensions	0.85 in. (H) x 2.4 in. (W) x 4.15 in. (L) 2.2 cm (H) x 6.1 cm (W) x 10.5 cm (L)
Weight	4.5 oz. (128 g) with battery
Power Requirements	One 9-volt alkaline battery (not included)
Measurement Ranges	0 - 2 kV Low Range 0 - 20 kV High Range
Voltage Display	3 Q w digit liquid crystal display
Distance indicator	LED targets. Aligned targets indicate 1 in. (2.54 cm) measurement distance
Measurement accuracy	Within 5% of actual voltage
Certifications	UL, C-UL, CE, CB-scheme, NOM

3M Air Ionizer Test Kit 718A Physical Characteristics

Item	Typical Properties
Charge Plate Assembly	Per ESD Association Standard Practice - 3.3
Charge Plate assembly Weight	2.5 oz (70 g)
Charger Dimensions	0.85 in. (H) x 2.4 in. (W) x 5.0 in. (L) 2.2 cm (H) x 6.1 cm (W) x 12.7 cm (L)
Charger Weight	6 oz. (170 g) with battery
Charger Power Requirements	One 9 volt alkaline battery
Charger Output	1100V minimum for positive or negative voltage
Certifications	UL, C-UL, CE, CB-scheme, NOM





Notes


Phone: 1-800-328-1368 or www.3M.com/electronics

Static Control Packaging and Transportation Products

2

3M provides a wide range of static shielding and barrier packaging products to protect sensitive electronic components from static charges during transit and while in storage. To meet your specific needs, 3M provides shielding bags, cushioned bags and wrap, moisture barrier bags and more in a variety of sizes and material composition.

3M™ Conductive Resin Products are easily grounded to prevent holding a static charge. Available as film, tubing, bags and drum liners, this material is made of opaque, volume-conductive, carbon-impregnated polyolefin. The electrical characteristics are not affected by humidity, and are suited for material handling, shipping and storage.







Static Control Packaging and Transportation Products

Static Shielding Bags

The 3M™ Metal-In Static Shielding Bag 1900/1910 is an economical alternative shielding bag for less demanding applications where testing and reusing bags are not prime considerations.

Aluminum is vapor-coated on half-mil polyester. This shielding layer is bonded between the polyester layer and a static-dissipative polyethylene inner layer. Static Shielding Bags 1900/1910 are amine-free, non-corrosive and meet EIA-541 definition for static shielding/dissipative packaging.

The Static Shielding Bag 1910 features a zipper closure for easy opening and closing.



3M™ Static Shielding Bag 1900/1910 Cross-section

Static Shielding Bag 1900/1910 Properties

Property	Test Method	Typical Value
Thickness	ASTM D2103	2.9 mil (74 microns)
Strength Tensile	ASTM D882	15 lbs./in. width > 5200 PSI MD/TD
Puncture	FTMS 101, Method 2065	>12 lbs. (5.4 kg)
Seam	MIL PRF 81705	Pass
Optical Density	ASTM D1003	.35-.45
Surface Resistance/Resistivity		
Interior	ESD S-11.11	<10 ¹¹ ohms
Exterior	ESD S-11.11	<10 ¹¹ ohms
Metallized Layer	Monroe #267	<10 ² ohm/sq.
Electrostatic Shielding	EIA-541 (V-Zap) ANSI/ESD S11.31	<30V <25nJ
Electrostatic Decay Interior	EIA-541	<2 sec.
Contact Corrosivity	FTMS 101C, Method 3005	Pass
Outgassing TML	ASTM E595	<1.0%
CVCM	ASTM E595	<0.1%
Heat Seal Properties Temperature		180°F – 250°F (82°C – 121°C)
Time		0.5 – 5.0 Sec.
Pressure		20 – 60 PSI (1.4 x 10 ⁵ – 4.1 x 10 ⁵ N/m ²)
Shelf Life (from date of manufacture)		1 – Year

Product No.	Description	
1900	Metal-In Static Shielding Bag. 100 bags per pack	
	Standard Sizes, in. (cm)	
	3 x 5	(7.6 x 12.5)
	4 x 4	(10.2 x 10.2)
	4 x 6	(10.2 x 15.2)
	4 x 24	(10.2 x 61)
	4 x 26	(10.2 x 66)
	4 x 30	(10.2 x 76.2)
	5 x 8	(12.7 x 20.3)
	5 x 10	(12.7 x 25.4)
	6 x 8	(15.2 x 20.3)
	6 x 10	(15.2 x 25.4)
	7 x 15	(17.8 x 38.1)
	8 x 8	(20.3 x 20.3)
	8 x 10	(20.3 x 25.4)
	8 x 12	(20.3 x 30.5)
	10 x 12	(25.4 x 30.5)
	10 x 14	(25.4 x 35.6)
	10 x 24	(25.4 x 61)
	10 x 26	(25.4 x 66.0)
	10 x 30	(25.4 x 76.2)
	11 x 15	(27.9 x 38.1)
	12 x 16	(30.5 x 40.6)
	12 x 18	(30.5 x 45.7)
14 x 18	(35.6 x 45.7)	
15 x 18	(38.1 x 45.7)	
16 x 24	(40.6 x 61)	
18 x 18	(45.7 x 45.7)	
18 x 24	(45.7 x 61)	
Custom Size Limits, in. (cm)		
2 x 3 to 35 x 36	(5.1 x 7.6 to 88.9 x 91.4)	

Product No.	Description	
1910	1900 with Zipper Closure. 100 bags per pack	
	Standard Sizes, in. (cm)	
	3 x 5	(7.6 x 12.5)
	4 x 4	(10.2 x 10.2)
	4 x 6	(10.2 x 15.2)
	5 x 8	(12.7 x 20.3)
	6 x 8	(15.2 x 20.3)
	6 x 10	(15.2 x 25.4)
	8 x 10	(20.3 x 25.4)
	8 x 12	(20.3 x 30.5)
	10 x 12	(25.4 x 30.5)
	10 x 14	(25.4 x 35.6)
	11 x 15	(27.9 x 38.1)
	12 x 12	(30.5 x 30.5)
	12 x 16	(30.5 x 40.6)
	12 x 18	(30.5 x 45.7)
	18 x 18	(45.7 x 45.7)
	Custom Size Limits, in. (cm)	
	3 x 5 to 20 x 30	(7.6 x 12.7 to 50.8 x 76.2)

Dimensions are inside measurements (W x L).
Custom printing on bags also available by special order.
(Please contact 3M Customer Service for quotations.)



Product Referral Generator

Antistatic Utility Tape 40..... pg. 68



Static Shielding Bags


3M™ Metal-Out Static Shielding Bags 2100R are produced with a construction in which the shielding layer is very near the exterior surface. A thin abrasion-resistant coating protects this metal surface from scratches, but still permits rapid charge draining when the bag is placed on a conductive or dissipative worksurface.

The bags use a polyester layer that is double the thickness found in economy bags. This polyester is the sturdy foundation to which the thin metallization layer is applied. This makes the bags more durable and provides electrical isolation that prevents electrical currents from passing through the bag.

The interior features an amine-free antistat agent that limits triboelectric charging of parts as they move around inside the bag. It does not contribute to corrosion of parts or crazing of polycarbonate materials, and it does not rely solely on the ambient humidity for effective performance.

It functions properly in conditions as low as 10% R.H.

3M™ Static Shielding Bag 2110R uses the same film as the 2100R, but features a zipper closure for easy opening and closing.



3M™ Static Shielding Bag 2100R

Cross-section

Static Shielding Bag 2100R/2110R Properties

Property	Test Method	Typical Value
Thickness	ASTM D2103	3.2 mil (81 microns)
Strength		>20 lbs. (>6250 PSI, 4.3 x 10 ⁷ N/m ²)
Tensile	ASTM D882	9000 PSI (6.2 x 10 ⁷ N/m ²)
Puncture	FTMS 101	24 lbs. (10.9 kg)
Seam	MIL PRF 81705	Pass
Optical Density	ASTM D1003	.35-.45
Surface Resistance/Resistivity		
Interior	ANSI/ESD S11.11	<10 ¹¹ ohms
Exterior	ANSI/ESD S11.11	<10 ⁹ ohms
Metallized Layer	Monroe #267	<10 ² ohm/sq.
Electrostatic Shielding	EIA-541 (V-Zap) ANSI/ESD S11.31	<30V <25nJ
Decay Time	EIA-541	<2 sec.
Contact Corrosivity	FTMS 101C Method 3005	Pass
Outgassing		
TML	ASTM E595	<1.0%
CVCM	ASTM E595	<0.1%
Heat Seal Properties		
Temperature		180°F - 250°F (82°C - 121°C)
Time		0.5 - 5.0 sec.
Pressure		20 - 60 PSI
Shelf Life (from date of manufacture)		1 - Year

Product No.	Description	
2100R	Metal-Out Static Shielding Bag. 100 bags per pack	
	Standard Sizes, in. (cm)	
	3 x 5	(7.6 x 12.5)
	4 x 4	(10.2 x 10.2)
	4 x 6	(10.2 x 15.2)
	4 x 26	(10.2 x 66.0)
	4 x 30	(10.2 x 76.2)
	5 x 8	(12.7 x 20.3)
	6 x 8	(15.2 x 20.3)
	6 x 10	(15.2 x 25.4)
	7 x 15	(17.8 x 38.1)
	8 x 8	(20.3 x 20.3)
	8 x 10	(20.3 x 25.4)
	8 x 12	(20.3 x 30.5)
	10 x 12	(25.4 x 30.5)
	10 x 14	(25.4 x 35.6)
	10 x 24	(25.4 x 61)
	11 x 15	(27.9 x 38.1)
	12 x 16	(30.5 x 40.6)
	12 x 18	(30.5 x 45.7)
	14 x 18	(35.6 x 45.7)
	15 x 18	(38.1 x 45.7)
16 x 24	(40.6 x 61)	
18 x 18	(45.7 x 45.7)	
18 x 24	(45.7 x 61)	
	Custom Size Limits, in. (cm)	
	2 x 3 to 35 x 36 (5.1 x 7.6 to 88.9 x 91.4)	

Product No.	Description	
2110R	2100R with Zipper Closure. 100 bags per pack	
	Standard Sizes, in. (cm)	
	3 x 5	(7.6 x 12.5)
	4 x 4	(10.2 x 10.2)
	4 x 6	(10.2 x 15.2)
	5 x 8	(12.7 x 20.3)
	6 x 8	(15.2 x 20.3)
	6 x 10	(15.2 x 25.4)
	8 x 10	(20.3 x 25.4)
	8 x 12	(20.3 x 30.5)
	10 x 12	(25.4 x 30.5)
	10 x 14	(25.4 x 35.6)
	11 x 15	(27.9 x 38.1)
		Custom Size Limits, in. (cm)
		3 x 5 to 20 x 30 (7.6 x 12.7 to 50.8 x 76.2)

Dimensions are inside measurements (W x L).
Custom printing on bags available by special order.
(Please contact 3M Customer Service for quotations.)



Static Control Packaging and Transportation Products

Static Shielding Bags

3M™ Metal-Out Cushioned Static Shielding Bags 2120R protect devices from physical damage as well as provide proper static shielding. The open-cell cushioning structure provides physical shock protection even when punctured. This system offers a more convenient packaging method than two-part packaging systems.

The five-layer construction of the bag protects against direct discharge, triboelectric charge and static fields. The inside layer, next to the components, is a smooth static-dissipative polyethylene liner that minimizes snagging of pins or sharp edges during insertion or removal.

Static Shielding Bag 2120R Properties


Property	Test Method	Typical Value
Thickness	PPP-C-1842	125 mil (3.175 mm)
Strength		
Tensile	ASTM D882	34 lbs./in.
Puncture	FTMS 101	22 lbs. (10 kg)
Seam	MIL PRF 81705	Pass
Surface Resistance/Resistivity		
Interior	EIA-541, ASTM D257	<10 ¹² ohm/sq.
Exterior	ANSI/ESD S11.11	<10 ¹¹ ohms
Metallized Layer	Monroe #267	<10 ² ohm/sq.
Shielding	EIA-541 (V-Zap)	<30V
Electrostatic Decay		
Interior	EIA-541	<2 sec.
Contact Corrosivity	FTMS 101C, Method 3005	Pass
Shelf life (from date of manufacture)		1 - Year

Product No.	Description
2120R	Cushioned Static Shielding Bags. 100 bags per pack
	Standard Sizes, in. (cm)
	6 x 7 (15.2 x 17.8)
	8 x 7 (20.3 x 17.8)
	8 x 11 (20.3 x 27.9)
	10 x 7 (25.4 x 17.8)
	12 x 11 (25.4 x 27.9)
	14 x 11 (35.6 x 27.9)
	14 x 15 (35.6 x 38.1)
	16 x 11 (40.6 x 27.9)
	16 x 15 (40.6 x 38.1)
	18 x 11 (45.7 x 27.9)
	18 x 15 (45.7 x 38.1)
	18 x 23 (45.7 x 58.4)
	Custom Size Limits, in. (cm)
5 x 5 to 24 x 23 (12.7 x 12.7 to 61 x 58.4)	

Dimensions are inside measurements (W x L).




3M™ Static Shielding Bag 2120R




Cross-section

Cushioned Static Shielding Wrap

3M™ Cushioned Wrap 2126R provides static shielding and physical protection for large or irregularly shaped circuit boards. It is made of the same open-cell cushioning construction used for the bag and is heat-sealable, but does not have the smooth inner liner. Supplied in rolls, it can be cut to fit various wrapping applications.



3M™ Static Shielding Wrap 2126R



Cross-section

Product No.	Description
2126R	Cushioned Static Shielding Wrap. Supplied in rolls
	Standard Sizes, in. x ft. (cm x m)
	24 x 125 (61 x 38.1) 48 x 125 (122 x 38.1)

2126R Properties

Property	Test Method	Typical Value
Thickness	PPP-C 1842	125 mil (3.175 mm)
Strength		
Tensile	ASTM D882	34 lbs./in.
Puncture	FTMS 101	22 lbs. (10 kg)
Surface Resistance/Resistivity		
Interior	ANSI/ESD S11.11	<10 ¹² ohm/sq.
Exterior	ANSI/ESD S11.11	<10 ¹¹ ohms
Metallized Layer	Monroe #267	<10 ² ohm/sq.
Shielding	EIA-541 (V-Zap)	<30V
Electrostatic Decay		
Interior	ANSI/ESD S11.11	<2 sec.
Contact Corrosivity	FTMS 101C, Method 3005	Pass
Shelf life (from date of manufacture)		1 - Year



Moisture Vapor Barrier Bag

The 3M™ Moisture Barrier Bag 3370 has been designed to meet the demanding moisture protection needs of the electronics market.


- **Durability** – Utilizes a multi-layer 3.6 mil film design that provides puncture and tear resistance. Proven reliability in vacuum packaging applications.
- **Moisture Protection** – Provides proven long-term protection in the most critical seepage area – the seams. 3M provides a 1/2 in. side seam to increase reliability that the finished bag is capable of maintaining the MVTR level equivalent to that of the film. The bag's multi-layer design eliminates problems associated with "pinholes" found in many foil bags.
- **ESD/EMI shielding** – Provides high frequency protection and static shielding to protect the most sensitive parts.
- **Cleanliness** – Uses a clean barrier film which exceeds the requirements of EIA-583 Class I and contains no amines, amides or N-Octanoic Acid. Outgassing levels are extremely low.
- **Construction** – Opaque bag is a highly durable construction (from the outside layer to the innermost layer): static dissipative layer, two aluminized polyester layers each 0.48 mil, 2.6 mil static dissipative polyethylene.
- **Industry Standards** – Meets the electrical and physical requirements of JESD 625A, MIL-PRF-81705, Type 1, EN100015, IEC61340-5-1.

The bag is available in many standard sizes and can be custom-sized for your specific application.



Static Shielding Bag 3370

Product No.	Description
3370	Moisture Vapor Barrier Bag. 100 bags per pack.
	Size, in. (cm)
	4 x 6 (10.2 x 15.2)
	5 x 8 (12.5 x 20.3)
	6 x 10 (15.2 x 25.4)
	8 x 10 (20.3 x 25.4)
	10 x 12 (24.4 x 30.5)
	12 x 16 (30.5 x 40.6)
	16 x 18 (40.6 x 45.7)
	18 x 24 (45.7 x 61)
	Custom Size Limits, in. (cm)
	3 x 3 to 35 x 36 (7.6 x 7.6 to 88.9 x 91.4)

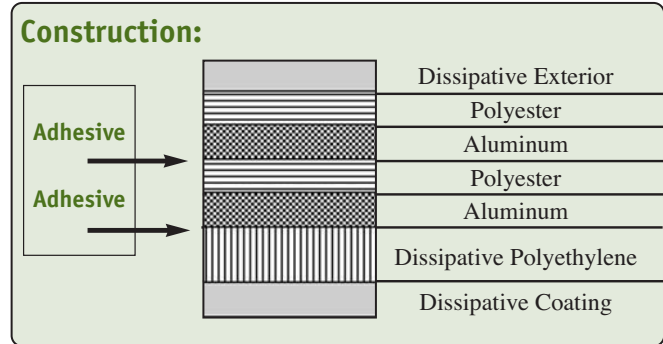

Property	Test Method	Typical Value
Thickness	Measure	3.6 mil. (92 microns)±10%
Moisture Vapor Transmission Rate	ASTM F 1249	< 0.015 grams/100 inches ² /24 hours (645.2 cm ²) (film and seams)
Tensile Strength	ASTM D 882	> 8200 PSI (5.7 x 10 ⁷ N/m ²)
Puncture Resistance	FTMS 101C Method 2065	> 20 lbs. (9.07 kg)
Seam Strength	Mil PRF 81705(D)	Pass (3.5 lb./1.6 kg hanging weight)
Surface Resistance (Interior and Exterior)	ANSI/ESD S 11.11	<1 x 10 ¹¹ ohms @12% R.H.
Metal Layer	Monroe 267 Buried Layer	< 100 ohms
Static Discharge Shielding	ANSI/ESD S 11.31	< 7 nJ
Outgassing	Static Headspace	<10µg/g Total outgassing, < 1µg/g Hydrocarbons
Ionic Contamination	Extraction/IC	<20ng/cm ² : Na, F, PO ₄ , SO ₄ , Cl, NH ₄ <100 ng/cm ² : NO ₃
Non Volatile Residue	ASTM E 1235 (reference)	<1 µg/cm ²
Polycarbonate Compatibility	EIA 564	Pass - 185°F (85°C), 3400 PSI
Amines, Amides, Silicone	FTIR/NMR	None Added



Conductive Film and Tubing

The 3M™ family of conductive film and tubing products is made of opaque, volume-conductive, carbon-impregnated polyolefin and are suited for material handling, shipping and storage.

Electrically Conductive Film

Made of opaque, volume-conductive, carbon-impregnated polyolefin film, in both short and long rolls. Versatile product – adaptable to numerous applications commonly found in the electronic or chemical industries.



3M™ Film 1700, 1760 Series

Conductive Tubing

3M™ Conductive Tubing 1724 is made of opaque, volume-conductive carbon-impregnated polyolefin in 500 ft. (152 m) rolls, and is used to make bags or protective sleeves for specialized packaging or storage requirements. The tubing is heat-sealable and is readily adaptable to automated packaging lines.



3M™ Tubing 1724

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.

Product No.	Description			
Short Rolls 1704	Film. Thickness: 4.0 mil. (102 microns)			
	Widths, in. (m)		Approximate Length/Roll, ft. (m)	
	36 (0.9)	150 (45.7)	150 (45.7)	150 (45.7)
	54 (1.4)	150 (45.7)	150 (45.7)	150 (45.7)
1706	Film. Thickness: 6.0 mil. (152,4 microns)			
	Widths, in. (m)		Approximate Length/Roll, ft. (m)	
	36 (0.9)	150 (45.7)	150 (45.7)	150 (45.7)
	45 (1.1)	150 (45.7)	150 (45.7)	150 (45.7)
1708	Film. Thickness: 8.0 mil. (203,2 microns)			
	Widths, in. (m)		Approximate Length/Roll, ft. (m)	
	36 (0.9)	150 (45.7)	150 (45.7)	150 (45.7)
	54 (1.4)	150 (45.7)	150 (45.7)	150 (45.7)
Long Rolls 1764	Film. Thickness: 4.0 mil. (102 microns)			
	Widths, in. (m)		Approximate Length/Roll, ft. (m)	
	36 (0.9)	1,500 (457)	1,500 (457)	1,500 (457)
	36 (0.9)	1,500 (457)	1,500 (457)	1,500 (457)

Product No.	Description			
1724	Lay Flat Conductive Tubing. Thickness: 4.0 mil. (102 microns)			
	Widths, in. (cm)		Approximate Length/Roll, ft. (m)	
	5 (12.7)	500 (152)	500 (152)	500 (152)
	12 (30.5)	500 (152)	500 (152)	500 (152)

Other widths and lengths available upon quotation.



Conductive Bags and Drum Liners

Conductive Bags

3M™ Conductive Bags 2004 are made of opaque, volume – conductive carbon-impregnated polyolefin. They are easily grounded, and the electrical characteristics are not affected by age or humidity. The standard bags are readily heat-sealable and 4 mil thick.



3M™ Shielding Bags 2004

Drum Liners

3M™ Drum Liners 2014 are simply larger sizes of the Conductive Bags 2004; bags wider than 18 in. (45.7 cm) are called drum liners. They do not hold static charge when grounded. They are commonly used for holding explosive chemicals that could be ignited by a static-caused spark, or dry chemicals that tend to cling to ordinary nonconductive static-laden plastics. A common application in the electronic or chemical industries is as a waste container liner.



3M™ Drum Liner 2014

Film, Bag and Tubing Properties*

Property	Test Method	Typical Value
Thickness	ASTM D2103	4 mil (102 microns)
Strength		
Breaking Factor	ASTM D882	10 lbs./in.
Puncture	Fed Std 101	8 lbs.
Heat Seal Parameters		
Temperature		180°F – 250°F
Time		0.5 – 5.0 sec.
Pressure		20 – 60 PSI (1.4 x 10 ⁵ – 4.1 x 10 ⁵ N/m ²)
Temperature Limits		-50°F – 150°F (-46°C – 66°C)
Vicat Softening Temperature	ASTM D1525	83°C
Electrical Properties		
Volume Resistivity	ASTM D991	<500 ohm-cm
Static Decay	EIA-541	<2 sec.
Water Vapor Transmission	ASTM F372	3 g/sq. m/day
Chemical Susceptibility	ASTM D543	
Dilute Acids and Alkalies		Resistant
Concentrated Acids & Alkalies		Slight attack
Alcohols (Isopropanol)		Resistant
Hydrocarbons (Heptane)		Moderate attack
Ketones (Acetone)		Slight attack
Oil and Gasoline		Moderate attack
Aromatic Hydrocarbons (Toluene)		Severe attack
Shelf Life		Indefinite

* Typical values for 4.0 mil film.
Physical characteristics will change with other thicknesses.

Product No.	Description
2004	Conductive Bags. Wall thickness: 4.0 mil. (102 microns) 100 bags per pack
	Standard Sizes, in. (cm)
	5 x 8 (12.7 x 20.3)
	6 x 10 (15.2 x 25.4)
	8 x 12 (20.3 x 30.5)
	10 x 12 (25.4 x 30.5)
	12 x 16 (30.5 x 40.6)
	15 x 18 (38.1 x 45.7)
	Custom Size Limits, in. (cm)
	4 x 4 to 42 x 72 (10.2 x 10.2 to 106.7 x 182.9)

Product No.	Description
2014	Drum Liners. Wall thickness: 4.0 mil. (102 microns) 100 per box
	Typical Drum Size, in. (cm)
	5 gallon: 18 x 24 (45 x 60)
	20 gallon: 24 x 36 (61 x 91)
	30 gallon: 30 x 36 (76 x 91)
	*55 gallon: 38 x 58 (96 x 147)
	* available 50 per box

Dimensions are inside measurements (W x L).
Other film thicknesses and bag sizes are available by special order.

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.



Single Card Carriers

3M™ Static-Shielding Single Card Carriers protect individual printed circuit boards from static and physical damage during storage and transport. Interiors are lined with dissipative cushioning foam.




3M™ Single Card Carrier

Product No.	Length, in. (cm)	Width, in. (cm)	Depth, in. (cm)
8520	10 (25.4)	8 (20.3)	1.25 (3.2)
8521	12 (30.5)	9 (22.9)	1.25 (3.2)
8522	18 (45.7)	17 (43.2)	2 (5.1)
8523	10 (25.4)	8 (20.3)	2 (5.1)

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

Single Device Carrier


The rugged injection-molded 3M™ Single Device Carrier 5701 can provide cost-effective physical and static protection for DIPs. The conductive units are volume resistive and will not lose their conductivity with age, nor do they depend on humidity to function. Single Device Carrier 5701 meets EIA-541 requirements for static shielding. A unique “saddle” design supports device leads and helps prevent accidental bending. Other design features include a smooth front surface on the container to adhere labels and a living hinge cover that snaps securely shut. Carrier accepts up to 18-pin 300 mil and 400 mil devices, and up to 28-pin 600 mil devices.

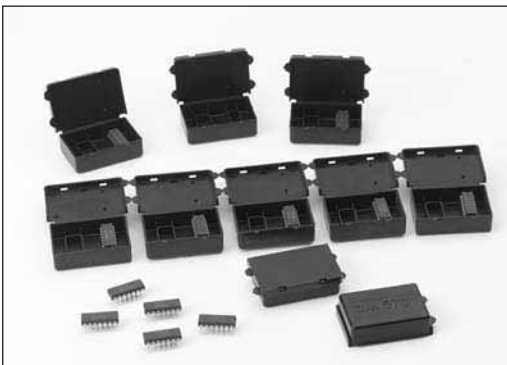

3M™ Single Device Carrier 5701

Product No.	Length, in. (cm)	Width, in. (cm)	Depth, in. (cm)
5701	1.55 (3.9)	1.01 (2.6)	0.46 (1.2)

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

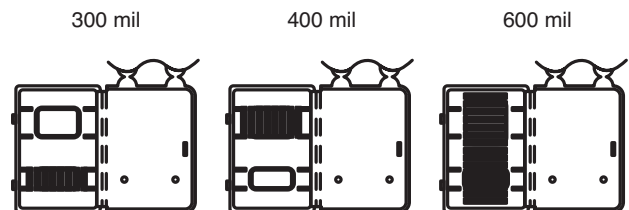



Connector Covers

3M™ Connector Covers 4270 Series feature a conductive composite material. The material is made intrinsically conductive by uniformly distributing a conductive matrix of fibers during compounding. The covers are permanently volume conductive and free of carbon black particulate. The covers do not leave black marks and are more suited to clean situations.



3M™ Connector Covers 4270 Series

Product No.	Description
4270	Feature a unique conductive composite material. Noncorrosive and produce no visible corrosion. Connector Covers 4270 Series were designed to meet the requirements and intentions of MS90376 and MIL PRF 5501/31A or 32A.

Military Application

Circular Connectors Covers 4270 Series were designed to meet the requirements and intentions of MS90376, and MIL PRF 5501/31A or 32A. Military contractors have qualified these materials to their own specifications and are encouraging their use.

Material Properties

Property	Test Method	Typical Value
Resistivity	ASTM D991	10^3 ohm-cm
Contact Corrosivity (Kovar plate)	FTMS 101C Method 3005	Pass
Crayoning	3M	Not visible
Elongation	ASTM D638	25%
Tensile	ASTM D638	1500 PSI (1.0 X 10 ⁷ N/m ²)
Vicat Softening	ASTM MD 1525	205°F (96°C)
Out Gassing	ASTM E595	Pass



Material Properties

Chemical	Reactions
Dilute Acids	Slight Attack
Dilute Alkalines	Slight Attack
Concentrated Acids	Severe Attack
Concentrated Alkalines	Severe Attack
Methanol, Ethanol, and Isopropanol	Resistant
Hydrocarbons	Slight Attack
Ketones	Dissolves
Oil and Gasoline	Severe Attack






Static Control Packaging and Transportation Products

3M™ Circular Cover 4270



Product Description	Old Prod. Desc.	"A"	"B"	"C"	"D"
Packaged 100/bag; 10 bags/box					
4270 M5501-31A-250	4270-4R	.670	.500	.250	.336
4270 M5501/31A-313	4270-5R	.670	.500	.313	.399
4270 M5501/31A-375	4270-6R	.670	.500	.375	.461
4270 M5501/31A-413	4270-8Y	.670	.625	.413	.483
4270 M5501/31A-480	4270-8R	.740	.500	.480	.540
4270 M5501/31A-500	4270-9R	.750	.500	.500	.586
4270 M5501/31A-530	4270-10Y	.750	.625	.530	.595
4270 M5501/31A-605	4270-10R	.840	.500	.605	.665
4270 M5501/31A-655	4270-12Y	.860	.625	.655	.715
4270 M5501/31A-720	4270-12R	.970	.500	.720	.755
4270 M5501/31A-785	4270-14Y	1.031	.625	.785	.845
4270 M5501/31A-850	4270-14R	1.125	.500	.850	.905
4270 M5501/31A-893	4270-16Y	1.125	.625	.893	.963
4270 M5501/31A-973	4270-16R	1.220	.500	.973	1.035
4270 M5501/31A-1028	4270-18Y	1.250	.625	1.028	1.088
4270 M5501/31A-1093	4270-18R	1.330	.562	1.093	1.155
4270 M5501/31A-1125	4270-19R	1.400	.562	1.125	1.213

Product Description	Old Prod. Desc.	"A"	"B"	"C"	"D"
Packaged 50/bag; 10 bags/box					
4270 M5501/31A-1150	4270-20Y	1.406	.625	1.150	1.215
4270 M5501/31A-1231	4270-20R	1.465	.562	1.231	1.301
4270 M5501/31A-1270	4270-22Y	1.500	.625	1.270	1.340
4270 M5501/31A-1340	4270-22R	1.590	.562	1.340	1.410
4270 M5501/31A-1390	4270-24Y	1.640	.625	1.390	1.460
4270 M5501/31A-1463	4270-24R	1.700	.562	1.463	1.533
4270 M5501/31A-1540	4270-25Y	1.810	.625	1.540	1.580
4270 M5501/31A-1645	4270-28Y	1.875	.625	1.645	1.718
4270 M5501/31A-1715	4270-28R	1.950	.562	1.715	1.790
Packaged 25/bag; 10 bags/box					
4270 M5501/31A-1890	4270-32Y	2.125	.625	1.890	1.970
4270 M5501/31A-1965	4270-32R	2.220	.562	1.965	2.040
4270 M5501/31A-2140	4270-36Y	2.340	.625	2.140	2.210
4270 M5501/31A-2215	4270-36R	2.435	.600	2.215	2.290
4270 M5501/31A-2380	4270-40Y	2.600	.625	2.380	2.450
4270 M5501/31A-2440	4270-40R	2.660	.600	2.440	2.530
4270 M5501/31A-2630	4270-44Y	2.875	.625	2.630	2.700
4270 M5501/31A-2720	4270-44R	2.960	.600	2.720	2.812
4270 M5501/31A-2880	4270-48Y	3.125	.625	2.880	2.950
4270 M5501/31A-2960	4270-48R	3.225	.600	2.960	3.050



Product Description	Old Prod. Desc.	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"
Normal Dimensions Packaged 100/bag; 10 bags/box									
4272 M5501-32A-50P	4272-50P	2.112	2.179	2.279	.636	.536	.469	.280	.240
4272 M5501-32A-50S	4272-50S	2.049	2.116	2.216	.574	.474	.407	.280	.240
4272 M5501-32A-37P	4272-37P	2.216	2.283	2.383	.530	.430	.363	.280	.240
4272 M5501-32A-37S	4272-37S	2.143	2.210	2.310	.462	.362	.295	.280	.240
4272 M5501-32A-25P	4272-25P	1.586	1.635	1.735	.530	.430	.363	.280	.240
4272 M5501-32A-25S	4272-25S	1.495	1.562	1.662	.462	.362	.295	.280	.240
4272 M5501-32A-15P	4272-15P	1.040	1.107	1.177	.512	.436	.369	.280	.240
4272 M5501-32A-15S	4272-15S	.955	1.022	1.122	.462	.362	.295	.280	.240
4272 M5501-32A-9P	4272-9P	.708	.775	.849	.512	.434	.367	.280	.240
4272 M5501-32A-9S	4272-9S	.627	.694	.794	.462	.362	.295	.280	.240



Labels

3M™ Labels 7000 Series are designed to alert personnel handling bags, boxes or other carriers that the contents are static-sensitive. When made part of a comprehensive static control process, the labels help prevent improper handling of static-sensitive components. Available in single use or reusable forms using the accepted industry static symbols: JEDEC-14 (Joint Electronic Device Engineering Council) and Military Standard 129.



3M™ Labels
7101/Reusable



3M™ Labels
7102/Destructable



3M™ Labels
7201/Reusable
3M™ Labels
7202/Destructable
3M™ Labels
7203/Reusable
3M™ Labels
7204/Destructable

Product No.	Description	Labels per Roll
7101	Reusable Orange w/Black Type JEDEC-14 Symbol	500
7102	Destructible Yellow w/Black Type JEDEC-14 Symbol	500
Size, in. (cm)		
		1.875 x 2.5 (4.6 x 6.4)
7201	Reusable Yellow w/Black Type MIL-STD-129 Symbol	500
7202	Destructible Yellow w/Black Type MIL-STD-129 Symbol	500
Size, in. (cm)		
		2 x 2 (5.1 x 5.1)
7203	Reusable Yellow w/Black Type MIL-STD-129 Symbol	250
7204	Destructible Yellow w/Black Type MIL-STD-129 Symbol	250
Size, in. (cm)		
		4 x 4 (10.2 x 10.2)

Hinged Containers

3M™ Hinged Containers are made from injected-molded plastic, and are noncorrosive and lightweight. The containers feature molded pin hinges that provide better security and reliability than traditional snap hinges.

Static-sensitive devices can be transported in these containers which provide protection from direct static discharges as well as from static fields from charged personnel and materials.



3M™ Hinged Containers

3M™ Containers are injection-molded in a variety of shapes and sizes. They are ideal for static-safe storage, kitting, and in-process handling and transporting of static-sensitive assemblies and devices.



3M™ Round Containers

Product No.	Length, in. (cm)	Width, in. (cm)	Depth, in. (cm)
4021	2.88 (7.3)	1.19 (3.0)	0.5 (1.3)
4022	3.88 (9.8)	1.94 (4.9)	0.5 (1.3)
4023	2.56 (6.5)	3.5 (8.9)	1.75 (4.4)
4024	7 (17.8)	3.5 (8.9)	1 (2.5)
4025	7 (17.8)	5 (12.3)	0.5 (1.3)

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.

Product No.	Diameter, in. (cm)	Height, in. (cm)
4011	2.38 (6.0)	0.88 (2.2)
4012	3.38 (8.6)	0.88 (2.2)
4013	1.81 (4.6)	4 (10.2)
4014	4.06 (10.3)	2.34 (6.0)
4015	3.81 (9.7)	4.69 (11.9)

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

Container Properties

Typical Property	Test Method	4540 EVA Copolymer Compound / 1801 Sheet Stock Typical Value*	4520 Polypropylene Compound / 1840 Sheet Stock Typical Value**
Hardness	ASTM D2240	58 - 62 Shore D	67 - 71 Shore D
Heat Deflection Temp.	ASTM D648	38° - 43°C @ 264 PSI	100°C @ 66 PSI; 50°C @ 264 PSI
Water Absorption	ASTM 570	0.1 - 0.2%	0.1 - 0.2%
Vicat Softening	ASTM D1525	88° - 92°C	148°C
Flammability	ASTM D635	4.5 - 5.5 cm/min.	2 cm/min.
Impact Resistance	ASTM D256	2.9 - 3.7 ft.-lbs./in. @ 72°F	8 - 10 ft.-lbs./in. @ 72°F
Notched Izod		0.6 - 1.3 ft.-lbs./in. @ 25°F	7 - 9 ft.-lbs./in. @ 25°F
Maximum Temp. Exposure	3M	150°F	180°F
Tensile Strength	ASTM D638	1700 - 2000 PSI	2800 - 3000 PSI
Flex Modulus	ASTM D790	40,000 - 50,000 PSI	130,000 - 150,000 PSI
Mold Shrinkage	ASTM 955	15 - 20 mil/in.	10 - 20 mil/in.
Electrical Conductance			
Volume Conductive	ASTM D991	< 500 ohm-cm	< 500 ohm-cm
Chemical Resistance	ASTM D543		
Alcohol		Resistant	Resistant
Aromatic Hydrocarbons		Severe Attack	Severe Attack
Aliphatic Hydrocarbons		Moderate Attack	Moderate Attack
Concentrated Acids		Slight Attack	Slight Attack
Concentrated Alkalines		Slight Attack	Slight Attack
Dilute Acids		Resistant	Resistant
Dilute Alkalines		Resistant	Resistant
Kerosene		Severe Attack	Severe Attack
Ketones (Acetone)		Moderate Attack	Moderate Attack
Mineral Oil		Slight Attack	Slight Attack
Oil and Gasoline		Moderate Attack	Moderate Attack

*EVA copolymer technical data for 4540 Resin; 1801; 4251-4254A Snap on Covers.

**Polypropylene technical data for 4520 Resin; 1840; 4011-4016 Round Containers and Lids; 4021-4025 Hinged Containers; 5701 Single Device Carriers; and 8520-8523 Single Card Carriers.

Note: Shelf life of products made with conductive resin is five years. Variations in storage conditions such as temperature fluctuation, exposure to sunlight or high humidity may reduce the shelf life.

Test Equipment

3

3M offers a complete selection of test equipment to verify the correct functioning of static control systems. These test products measure static voltages on objects and surfaces, verify air ionizer performance and test static control wrist straps and footwear.


Instruction manuals for 3M™ Test Equipment are available online at <http://www.3m.com/electronics>.










Test Equipment

Phone: 1-800-328-1368 or www.3M.com/electronics

3M™ Test Equipment	Measures	Application
 <p>701 Test Kit for Static Control Surfaces (Certified only)</p>	<p>Resistance: surface-to-ground and surface-to-surface</p>	<p>Mats and Sheets 1800 Series Workstation Kits 8000 Series Mats 8200 Series Laminate 8300 Series Floor Tile 8400 Series Field Service Kits 8500 Series Rubber Mats 8800 Series Other static-dissipative surfaces and surface treatments</p>
 <p>711 Charge Analyzer (Certified only)</p>	<p>Charge retention/drainage</p> <p>Charge generation/drainage</p>	<p>Ionized Air Blowers 960/963 Ionized Air Gun 980 Other benchtop air ionizers Static Shielding Bags Mats and Sheets 1800 Series Mats 8200 Series Other mats Floor Tile 8400 Series Rubber Mats 8800 Series Wrist Straps 2200 Series Shoe Straps 2050 Series Other wrist straps and shoe straps Tapes Other static-dissipative surfaces and surface treatments</p>
 <p>718 Static Sensor (Non Certified and Certified versions available)</p>	<p>Static Voltages</p>	<p>Objects and surfaces</p>
 <p>718A Air Ionizer Test Kit</p>	<p>Ion balance Static decay</p>	<p>Air Ionizers</p>
 <p>724 Continuous Workstation Monitor</p>	<p>Resistance</p>	<p>Mats and Sheets 1800 Series Mats 8200 Series Hard Laminate 8300 Series Mats 8800 Series Dual Conductor Wrist Straps</p>



3M™ Test Equipment	Measures	Application
	725 Wrist Strap Monitor	Resistance
	740 Wrist Strap and Footwear Tester (Non Certified and Certified versions available)	Resistance
	746 Wrist Strap Tester (Non Certified and Certified versions available)	Resistance
	747 Shoes/Wrist Strap Tester (Certified only)	Resistance
	790 Static Monitor	Voltage



Test Equipment

Test Kit 701

The 3M™ Test Kit 701 contains a lightweight, user-friendly megohmmeter plus all of the components needed to make testing mats and other surfaces simple and accurate. All of the items are packaged in a foam-lined carrying case.

The kit meets the intent of ANSI/ESD Standard 4.1, “Worksurfaces – Resistive Characterization.” ANSI/ESD Standard 7.1, “Floor Materials – Resistive Characterization of Materials,” and MIL-PRF-87893, “Workstation, Electrostatic Discharge (ESD) Control,” for auditing purposes. The meter has separate scales and test settings for measuring surface-to-ground and surface-to-surface resistance at two prescribed test voltages (10V and 100V), and system continuity. The easy to read scales are both color-coded and numbered.



3M™ Test Kit 701



Product Referral Generator

- Floor Mats/Runners 8200 Series pg. 16
- Dissipative Rubber Mats/Runners 8800 Series pg. 17
- Static Conductive Floor Tile 8400 Series pg. 64-65

Product No.	Description
701	Test Kit for Static Control Surfaces. Also available in Certified. Kit contains: <ul style="list-style-type: none"> • 1 Megohmmeter 12 oz. (340 g) 1.8 x 3.3 x 4.6 in. (4.57 x 8.38 x 11.68 cm) • 2 Test Weights 5 lbs. (2.27 kg) each • 2 Test Leads, 10 ft. (3 m) each • 1 Insulated Bulldog Clip • 1 Alligator Clip • 1 Continuity Test Plate • 2 Batteries (22.5V and 1.5V) • 1 Operator's Manual • 1 Molded Carrying Case
701-L	Test Leads
701-M	Megohmmeter only
701-W	5 lb. Test Weight

Test Kit Properties

Product	Item	Typical Properties
Kit	Weight:	14 lb. (6.35 kg)
	Case Dimensions:	5.125 in. x 10 in. x 13.5 in. (13.02 cm x 25.4 cm x 34.29 cm)
	Case Material:	Blow-molded, high density polyethylene with foam inserts
	Case Color:	Gray
Meter	Weight:	12 oz. (0.34 kg)
	Dimensions:	1.8 in. x 3.3 in. x 4.6 in. (4.57 cm x 8.38 cm x 11.68 cm)
	Resistance Ranges:	
	Continuity Test Mode	0 – 10M Ω (internal R=500 K Ω)
10V Surface Test Mode	10 ⁵ – 10 ¹¹ Ω (internal R=2 M Ω)	
100V Surface Test Mode	10 ⁵ – 10 ¹¹ Ω (internal R=2 M Ω)	
Weights	2 Test Weights:	5 lb. (2.27 kg) each
	Dimensions:	Diameter – 2.5 in. (6.35 cm) Height – 5.06 in. (12.85 cm); includes handle and pad
	Pad Material:	Conductive silicone rubber
	Pad Dimensions:	Diameter – 2.5 in. (6.35 cm) Thickness – 0.25 in. (0.64 cm)
Leads	Length:	10 ft. (3.05 m)
	Wire Size:	18 gauge
	Insulation:	Silicone rubber
	Diameter:	0.125 in. (0.32 cm)
Power Supply	Batteries (2):	22.5 volt (Eveready #505 or equivalent) and 1.5 volt (AA).



Charge Analyzer

The 3M™ Charge Analyzer 711 was designed to test the performance of products used for the purpose of static control and elimination. The Charge Analyzer 711 can be used as a laboratory analytical tool, evaluating the performance of ionizing equipment, static-protective packaging, worksurfaces, and personnel grounding systems. It is very effective for use as a demonstration tool in employee static awareness training sessions.

The lightweight and compact construction of the unit offers versatility in the workplace. The modular internal construction simplifies modifications and repair by exchange of the functional printed circuit boards. All parameter settings are controlled via a built-in EEPROM. Periodic calibrations can be performed without the need to open the chassis. When the analyzer is switched off, all last set parameters are stored in the EEPROM. These parameters are defaulted to when the unit is switched on again. The analyzer 711 is powered by built-in rechargeable NiMH-batteries or an AC wall plug-in adapter. All interfacing connections are made at the rear of the unit.



3M™ Charge Analyzer 711



Product No.

Description

711

The Charge Analyzer 711 is shipped in a durable black case with foam interior, containing the following accessories:
(Certified only)

- Cup electrode
- Plate electrode
- Cylinder electrode
- AC/DC Adapter, DC 12 V / 500 mA
- Sensor cover
- Teflon™ measuring lead, 1 m
- Grounding cord with alligator clip
- RS 232 interface cable
- 50 mm (2 in.) high conductive container with insulating handle
- Insulated bulldog clip
- Metal spacers (3) with thread, 76 mm, (3 in. length)
- Software disk for data acquisition
- Operating instructions
- Transport case
- Certificate of Conformity
- Sensor, 711 RS for measuring electrostatic fields, with 2 m cord (6.5 ft.)



Test Equipment

3M™ Charge Analyzer 711 Properties

Item	Typical Properties
Dimensions	Base unit: 6 x 6 x 6 in. (15.2 x 15.2 x 15.2 cm)
Weight	3.53 lbs. (1.6 kg)
High Voltage Power Supply (internal)	> 1100 V positive or negative (current limiting resistor: 10 MΩ)
Low Voltage Power Supplies	Built-in NiMH-rechargeable batteries, 1400 mAh AC/DC Adapter: secondary side, DC 12 V/500 mA
Operating Time (rechargeable batteries)	4 hours (approximately) with full charge
Storage Memory Capacity	128 k EEPROM (e.g. sufficient for approximately 100 CPM*-measurements)
Response Time	0 to 100%; 100 ms
Impedance	10 ¹⁵ Ω (Teflon™-separators cleaned)
Accuracy	± 2.5% of range end value (digitized) ± 5% for the analog output (for 1000 Volt range) ± 10% for the analog output (25, 100, 500 and 5000 Volt ranges)
Operating Functions	CPM* (positive/negative/automatic), voltmeter and fieldmeter
Interfaces	Analog output ± 2 V (± 1 V, in 500 V range for voltmeter), serial PC-COM, and external field sensor type 711 RS
Displays	Two, 11-segment positive & negative LED-bar charge indicators 16-digit alphanumeric dual row LCD
Settings - CPM* Operating Function	Starting voltage: 600 V - 1200 V in 1 V-steps Stop voltage: 1 V - 500 V in 1 V-steps (in decimal mode)
Static Decay Time	0.1 seconds - 99.9 seconds
Offset-Voltage Time	1 - 10 seconds in 1 second steps and 10 - 60 seconds in 10 second steps
Voltmeter Operating Function	Ranges: 25 V, 100 V, 500 V, 1.0 kV, 5.0 kV and auto range
Fieldmeter Operating Function	Ranges: Manual 1.25 kV/m, 5 kV/m, 25 kV/m, 50 kV/m, 250 kV/m, and automatic
Plate Electrode	SS-steel (152 x 152) mm/(6 x 6) inches, removable, capacitance (20 ± 2) pF
Cup Electrode	Gold-plated electrode with 4mm-banana socket, for voltage measurements
Selection of Operating Function	Pre-setting is "FIELDMETER," additional automatic settings by applying the plate or cup electrode
Operating Temperature	32°F to 113°F (0°C to 45°C)
Humidity	Maximum 60 % Note: At high relative humidity, charge leakage may occur affecting the decay time measurement.
Storage Temperature	-22°F to 140°F (-30°C to 60°C)
Declaration of Conformity	EN 60204-1/85 EN 60204-1/91 EN 61010 (SAFETY) EN 50082-1 EN 50082

*Charge Plate Monitor




Wrist Strap Tester

The 3M™ Wrist Strap Tester 746 can be used to test wrist straps in a variety of situations, from daily testing in a production facility to periodic testing at remote sites or field service locations. This versatility allows the Wrist Strap Tester 746 to be the standard for all applications in your company.

The tester is supplied with an AC adapter, but it also contains a long-life lithium battery as back-up power for portable applications or during power failures. (A “battery” light notifies the user when the battery needs replacement.)

As with other 3M wrist strap testers, the unit is easy to use. It can test the entire wrist strap system while it is being worn, or it can test the individual components to isolate a fault condition.

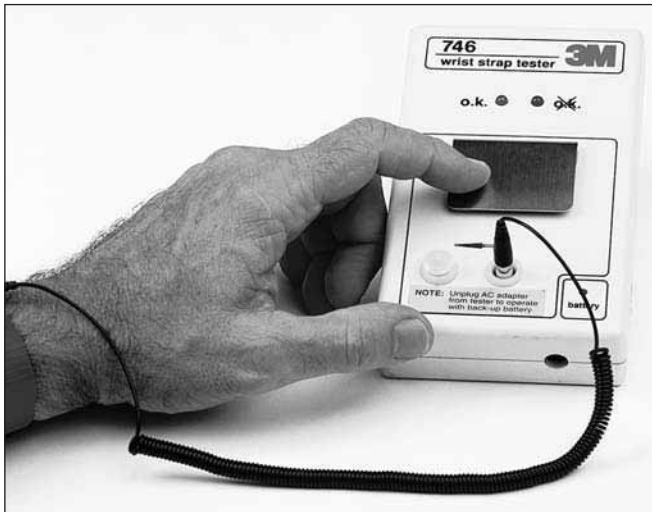

3M™ Wrist Strap Tester 746



3M™ AC Adapter 746P

Product No.	Description
746	Wrist Strap Tester supplied with an AC adapter, a lithium battery, and a wall mounting kit. Also available in Certified.
	Size, in. (cm)
	6.25 x 3.75 x 1.25 (15.8 x 9.5 x 3.3)

Wrist Strap Tester 746 Properties

Item	Typical Properties
Weight	7 oz. (200 g) without battery
Power	9-volt regulated 75 mA AC/DC adapter (supplied with 746)
Battery	9-volt lithium manganese (NEDA 1604LC) (supplied with 746) *does not contain mercury, cadmium, or lead.
Test Voltage	19 Volts DC, ± 1 volt (open circuit)
Resistance Ranges	Upper limit – 10 M ohms ± 10% Lower limit – 750K ohms +20% -0%
Wall Mounting	3M™ Dual Lock™ System
AC Adapter Specifications	
Input Voltage:	AC 120 V
Output Voltage:	DC 9 V (Regulated)
Output Current:	75 mA
Output Connector	
Dimensions:	5.5 mm (O.D.) x 2.1 mm (I.D.) x 11 mm (L)
Output Connector	
Polarity:	Center Negative



Test Equipment

Shoes/Wrist Strap Tester

3M™ Shoes/Wrist Strap Tester 747

Daily inspection and recording of wrist straps and shoes testing are very important as a fundamental countermeasure against static on personnel. A fully functional resistance tester, the new 3M Shoes/Wrist Strap Tester 747 makes it possible to control both in a single unit. Use of the external data port allows automatic recording of test results eliminating manual recording and possible errors.

Features

- Checks personnel wearing wrist straps, ESD shoes and heel straps against preset resistance limits
- Actual measurements are indicated on a 3 Q w digit display and by LED lamps
- Test results available on RS-232C Serial Port and output jack
- Testing data automatically recorded when utilizing the 3M™ Data Logging Software 747DLS

ESD Shoe and Heel Strap Testing

- Electrical resistance of ESD shoes and heel straps is measured and compared to preset limits.
- Set value for the upper and lower resistance limits can be varied. Upper limit: 10M ohms, 35M ohms, or 100M ohms. Lower limit: 100k ohms, 1.0M ohms.
- LCD display (3 Q w digit) indicates actual resistance measurement value.*
- LEDs on the tester indicate Low, OK, and High test results.
- Measurement requires standing on the Shoe Testing Plate and pressing the touch panel.

*Includes body resistance

Wrist Strap Testing

- Electrical resistance of wrist straps is measured and compared to preset limits.
- Set value for an upper resistance limit can be varied. (5M ohms, 10M ohms and 35M ohms). Lower resistance limit 650K ohms preset internally.
- LCD display (3 Q w digit) indicates actual resistance measurement value.*
- LEDs on the tester indicate (Low, OK and High) test results.
- Measurement requires inserting ground cord plugs into a test jack and pressing the touch panel.

*Includes arm to wrist band contact resistance


External Output Functions

- RS-232C Serial Data Port provides resistance value and pass/fail test result information for computer data logging. Used with 3M Data Logging Software 747DLS.
- Open collector output configuration provides High and Low signal levels for pass/fail test result indication. When used with an external relay door, entries can be controlled.

Product No.	Description
747	Shoes/Wrist Strap Tester (Certified only)

Shoes/Wrist Strap Tester 747 Properties

Item	Typical Properties
Dimensions	7.7 in. x 4.7 in. x 1.89 in. (H x W x D) 196 mm x 120 mm x 48 mm
Weight	1.2 lb. (550 g) without batteries
Power Requirements	AA (LR6) alkaline battery (1.5 VDC x 6) or AC adapter (9 VDC, center positive)
Environmental Operating Conditions	Temperature range (0° to 40°C) 80% Relative Humidity

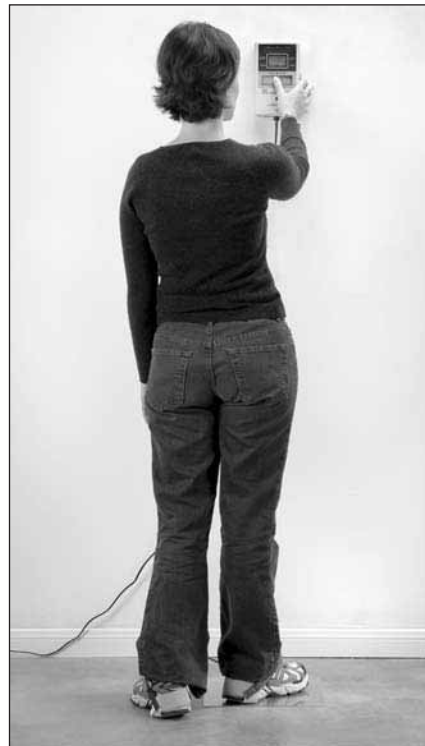

3M™ Shoes/Wrist Strap Tester 747



Data Logging Software

3M™ Data Logging Software 747DLS

Designed to work with the 3M™ Shoes/Wrist Strap Tester 747, the 3M™ Data Logging Software 747DLS offers you a complete system of testing and recording results of your wrist straps and footwear. Our complete system performs an accurate resistance measurement of either or both your wrist straps and footwear. Once completed, the results will then be automatically saved on a PC which allows efficient data storage and faster data retrieval.

The software communicates via RS-232 signal to a personal computer and can handle up to eight stations using a single PC. Longer distances of up to 4000 ft. (1200 m) can also be accommodated.

Features

- Electronic data logging eliminates manual logging thus provides highly reliable record
- Can accommodate up to 8 stations which saves money
- Can be used with barcode, magnetic stripe or proximity card readers/identification cards
- Can be used for up to 4000 ft. (1200m), allowing it to serve almost an entire facility
- Incorporates a pilot lamp in monitoring so it can identify which testing stations are currently being used
- Printable records feature allows hard copies to be kept for documentation

System Requirements

Windows™ 95, 98 2nd Edition, 2000 with Service Pack 2 and Millenium Edition. Pentium 133 MHz; 32 MB RAM; 26 MB Hard Disk Space; 800x600 True Color 32 Bit Display. It will also require one (1) PCI available slot, two (2) are recommended for multi-station. For a single station, it will only require two (2) communications ports available (COM1 & COM2).

Product No.	Description
747DLS	Data Logging Software



3M™ Shoes/Wrist Strap Tester 747

Card Reader Technical Requirements

Serial Interface Specification	
Bit Rate	110, 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 (selectable)
Word Length	Data Format-4, 5, 6, 7, 8 (selectable); Parity Bit-Even, Odd, None, Mark, Space (selectable); Stop Bit-1, 1.5, 2 (selectable)
Handshaking (Flow Control)	None, Xon/Xoff, RTS/CTS, RTS/Xon/Xoff (selectable)
Magnetic Card Reader Data	
Message Indicator	Start of Text - Single ASCII character; End of Text - Single ASCII character
Track Framing Characters	Track 1 Start - Single ASCII character; Track 1 End - Single ASCII character
	Track 2 Start - Single ASCII character; Track 2 End - Single ASCII character
	Track 3 Start - Single ASCII character; Track 3 End - Single ASCII character
Barcode Reader Data	
Message Indicator	Start of Text - Single ASCII character; End of Text - Single ASCII character
Proximity Card Reader Data	
	Start of Text - Two ASCII characters; End of Text - CR, LF, CR/LF (selectable)



Wrist Strap and Footwear Tester



3M™ Wrist Strap and Footwear Tester 740

The 3M™ Wrist Strap and Footwear Tester 740 is an AC-powered unit designed to be wall-mounted in a production facility for daily testing of employees' static control wrist straps. Use of the optional 3M™ Shoe Electrode 741 attachment allows the tester to be used as a footwear tester as well. The optional Shoe Electrode 741 is a test plate that connects to the Wrist Strap and Footwear Tester 740. By standing on the shoe electrode, personnel can use the wrist strap and footwear tester to check the operation of static control footwear, heel straps and the like. This electrode, constructed of rugged stainless steel in a molded plastic base, must be ordered separately.

Simple to operate, the unit has several useful features and options. Red and green LEDs give a clear "go" or "no go" indication. The user can select any of four different resistance levels, making the tester a versatile instrument to meet varying industry, corporate and global standards. The unit tests the wrist band and cord while they are being worn, and can also test each component independently to isolate an indicated fault. There is also a digital output that can be used to interface with a computer, automatic door lock, alarm or other control device.

The wrist strap and footwear tester comes with the base unit, output connector, 3M™ Dual Lock™ Wall-Mounting System and template, cover for the wrist strap plug-in jack and the AC/DC transformer.

Wrist Strap Tester 740 Properties

Item	Typical Properties
Dimensions	5.43 in. x 7.48 in. x 2.09 in. (13.8 cm x 19.0 cm x 5.3 cm)
Weight	15.75 oz. (450 gm)
Power Supply	27 volt DC transformer, 150 mA (AC/DC adapter supplied) 6 ft. (1.8 m) wire
Test Voltage	20 volts DC, ± 1 volt (open circuit)
Resistance Ranges	Lower limit: 750K ohms
Upper Limit Wrist Strap	2, 5, 10 and 35M ohms
Upper Limit Footwear	10, 35, 50 and 100M ohms
Accuracy	+ 20%, - 0% for 750K ohms lower limit ± 10% for 2M, 5M, 10M, 35M and 50M ohms ± 20% for 100M ohms
Output	Open collector at pins 1, 2, 4 and 5. DC return at pin 6. + 5 volts at pin 3.
Wall Mounting	3M™ Dual Lock™ System.

Shoe Electrode 741 Properties



Item	Typical Properties
Dimensions	20 in. x 16 in. (50.8 cm x 40.6 cm)
Weight	5 lbs. (2.3 kg)
Construction	1 mm stainless steel plate and molded plastic base
Other	3M adhesive strip prevents unit from sliding while in use. Shoe electrode interconnect cord 6 ft. (1.8 m).

Note: The Shoe Electrode 741 is not included with the Wrist Strap and Footwear Tester 740 and must be ordered separately.



Air Ionizer Tester/Field Meter and Charger

Static Sensor 718

The 3M™ Static Sensor 718 is an easy-to-use, hand-held instrument designed to measure static voltage, on objects and surfaces, arising from electrostatic charge buildups. This instrument can play a valuable role in an organization's ESD-control program by helping the user locate and quantify ESD trouble-spots.

Features

- Small-size, lightweight, conductive plastic housing
- Membrane switches for Power, Range/Zero, and Hold functions
- Digital, LCD (liquid-crystal) display is easy to read and updates quickly
- Ranging systems assist user in making quick and easy measurements
- Measurements accurate to 5%
- Output jack available for continuous measurements



3M™ Static Sensor 718

Air Ionizer Test Kit 718A

The 3M™ Air Ionizer Test Kit 718A, when used in conjunction with the Static Sensor 718, can be used for periodic verification of air ionizer performance. The test kit consists of a charge plate and a charger.



3M™ Air Ionizer Test Kit 718A

Product No.	Description
718	Static Sensor, including meter, Operator's Manual, and Certificate of Performance verification. Also available in Certified.
718A	Air Ionizer Test Kit, including charge plate assembly, charger, Operator's Manual, and Certificate of Performance verification.

Static Sensor 718 Properties

Item	Typical Properties
Dimensions	0.85 in. (H) x 2.4 in. (W) x 4.15 in. (L) 2.2 cm (H) x 6.1 cm (W) x 10.5 cm (L)
Weight	4.5 oz. (128 g) with battery
Power Requirements	One 9-volt alkaline battery (not included)
Measurement Ranges	0 – 2 kV Low Range 0 – 20 kV High Range
Voltage Display	3 Q w digit liquid crystal display
Distance indicator	LED targets. Aligned targets indicate 1 in. (2.54 cm) measurement distance
Measurement accuracy	Within 5% of actual voltage
Certifications	UL, C-UL, CE, CB-scheme, NOM

Air Ionizer Test Kit 718A Properties

Item	Typical Properties
Charge Plate Assembly	Per ESD Association Standard Practice - 3.3
Charge Plate assembly Weight	2.5 oz (70 g)
Charger Dimensions	0.85 in. (H) x 2.4 in. (W) x 5.0 in. (L) 2.2 cm (H) x 6.1 cm (W) x 12.7 cm (L)
Charger Weight	6 oz. (170 g) with battery
Charger Power Requirements	One 9 volt alkaline battery
Charger Output	1100V minimum for positive or negative voltage
Certifications	UL, C-UL, CE, CB-scheme, NOM



Product Referral Generator

- Mini Air Ionizer 960 pg. 32
- Benchtop Air Ionizer 963/963E pg. 31
- Ionized Air Gun 980/980E pg. 30



Notes

Phone: 1-800-328-1368 or www.3M.com/electronics

To help create and maintain the highest standards of protection against ESD in the workplace, 3M offers several options for employee training and program development. A two-day, intensive workshop is conducted four times a year in Austin, Texas as a “train-the-trainer” or for the ESD program manager. Awareness, testing and measuring, standards development, and much more, comprise this course. 3M also regularly conducts local one-day static awareness seminars for electronics manufacturers, so contact your local 3M representative for more information. When employee training is needed, 3M can provide solutions as well. As part of our product support, 3M can deliver various versions of training for your organization, be it basic or advanced. Having the facts presented properly, in terms easily understood, can help facilitate your ESD control program.





3M Hosts ESD Training on Static Control in Austin

3M offers an in-depth training program on static control at the 3M Austin Center. The two-day course is designed for people responsible for implementing or managing a company's ESD program.

The course content, designed for the beginner to intermediate level, will cover such topics as:

- What are the foundations of ESD? This includes terminology, basic electricity and its relationship to ESD, basic ESD controls and how parts fail.
- How can static electricity be controlled?
- How do I conduct a plant survey or audit?
- What are appropriate surfacing and grounding materials and techniques?
- How and why do I use static-protective packaging materials?

- What is ionization, how do I properly test ionizers, and how do I use ionization effectively?
- What about field service? Do my customers or I need it?
- What do I need to know about testing and measuring – frequency of tests, methods, equipment, interpretation of results and use of appropriate test techniques?
- How and when do I use continuous wrist strap and/or work station monitoring – installation, operation and attributes?
- How do I know if I have a static problem?

Please contact Customer Service at 1-800-328-1368 for registration information and class schedule. To view current agenda, or learn more about 3M training seminars, refer to www.3M.com/electronics

20.20 Standard Requires Training

by Bill Pellegrin, ESD Training Manager

The new ANSI/ESD 20.20 standard truly breaks new ground in the standardization of static control for electronics, but are you aware that it contains a requirement for training?

If training has been nonexistent or scattered in your organization, you will need to make it a high priority in adopting 20.20. You must first decide on a schedule for training. Will it be once a year, twice a year, or more often? Ideally, the schedule will correspond to the needs of your organization. Perhaps you expect to hire large numbers of new employees. Or maybe you must train employees in rapidly changing technologies and manufacturing methods. The schedule should reflect those needs.

Who is trained and on what? Some organizations require that all employees, from the general manager to the clean-up crew, take the same training. Other organizations develop a high level of training for assemblers, a medium level for inventory and shipping clerks, and a basic level of training for office staff and others who rarely enter the manufacturing area.

How will you provide the training? Will you use "live" instructors, video tapes, individualized computer-based training programs, or a combination of these methods? From my experience, I have found that a "live" instructor is the most effective because the training is interactive. The instructor can answer questions and tailor the training to the trainees' education and experience. The video approach is the least effective because it requires no interaction, only passive watching and listening.

How will you verify trainees' understanding of static control? You can accomplish this through a written test, on-the-job observation, computer-based testing or a personal interview. My preference would be for the class to verbally review all the critical points of training as the means to check their retention, and follow that with on-the-job observation to ensure they are practicing proper static control procedures.

Finally, 20.20 training should include a mechanism for updating your employees in response to changes in product sensitivity, introduction of new products, upgrades in manufacturing techniques, and other changes. Ideally, you will provide training with every change so employees can adjust accordingly.

Training is so fundamental to an effective program of static control that it has been made a requirement under the ANSI/ESD 20.20 standard. When your employees understand how electrostatic discharge occurs, the extent of its damage, and how to protect against it, they will be more likely to use static protection equipment properly and abide by static control procedures. They will better understand their role in producing high quality, profitable products.



Charge Analyzer

The 3M™ Charge Analyzer 711 was designed to test the performance of products used for the purpose of static control and elimination. The Charge Analyzer can be used as a laboratory analytical tool, evaluating the performance of ionizing equipment, static-protective packaging, worksurfaces, and personnel grounding systems. It is very effective for use as a demonstration tool in employee static awareness training sessions.

The lightweight and compact construction of the unit offers versatility in the workplace. The modular internal construction simplifies modifications and repair by exchange of the functional printed circuit boards. All parameter settings are controlled via a built-in EEPROM. Periodic calibrations can be performed without the need to open the chassis. When the analyzer is switched off, all last set parameters are stored in the EEPROM. These parameters are defaulted to when the analyzer 711 is switched on again. The Charge Analyzer is powered by built-in rechargeable NiMH-batteries or an AC wall plug-in adapter. All interfacing connections are made at the rear of the unit.



3M™ Charge Analyzer 711

Product No.	Description
711	<p>The Charge Analyzer 711 is shipped in a durable black case with foam interior, containing the following accessories:</p> <ul style="list-style-type: none"> Cup electrode Plate electrode Cylinder electrode AC/DC Adapter, DC 12 V / 500 mA Sensor cover Teflon™ measuring lead, 1 m Grounding cord with alligator clip RS 232 interface cable 50 mm (2 in.) high conductive container with insulating handle Insulated bulldog clip Metal spacers (3) with thread, 76 mm, (3 in. length) Software disk for data acquisition Operating instructions Transport case Certificate of Conformity Sensor, Model 711 RS for measuring electrostatic fields, with 2 m cord (6.5 ft.)



Product Referral Generator

Also see Test Equipment Section pg.47-57
 For properties of the 3M™ Charge Analyzer 711, see pg.51-52



Notes

Phone: 1-800-328-1368 or www.3M.com/electronics

Permanent Flooring Products

5

3M™ Tile Flooring Systems provide a first line of defense against the buildup of static charge on personnel and equipment. Static protective permanent flooring, in conjunction with conductive footwear or heel grounding straps, drains static charge away to ground through the floor. It is a solid foundation for a comprehensive static control system.





Permanent Flooring Products

Static Control Vinyl Floor Tile


3M™ Static Control Floor Tile 8400 Series is a long-term solution to controlling electrostatic discharge. This solid vinyl tile is durable and attractive and can be installed by competent flooring contractors. The flexible, resilient tiles are made with only 100% pure vinyl and contain a minimum amount of filler and none of the regrind that can make tile brittle. Both the conductive and static-dissipative versions are available in a selection of bright, vivid colors. A proprietary manufacturing process seals in the conductive carbon medium, resulting in a unique tile that can be easily cleaned and shined to a gloss while maintaining its electrical properties—without the use of an ESD wax or polish.



3M™ Static Control Vinyl Floor Tiles 8400 Series

Key Features

- Lifetime warranty on electrical performance
- 10-year limited warranty on materials
- Long-term ESD protection
- Superior wear resistance and durability
- Low outgassing
- Easy, low-cost maintenance (no waxing — ever!)
- Made with 100% pure homogeneous vinyl; no regrind
- Micro-edged for precise squareness for ease of installation
- Available in 24.25 in. size for raised access floors, plus 12 in., 24 in., and 36 in. sizes
- Available in 12 standard colors; custom colors can be formulated
- May be seam welded or self-covered

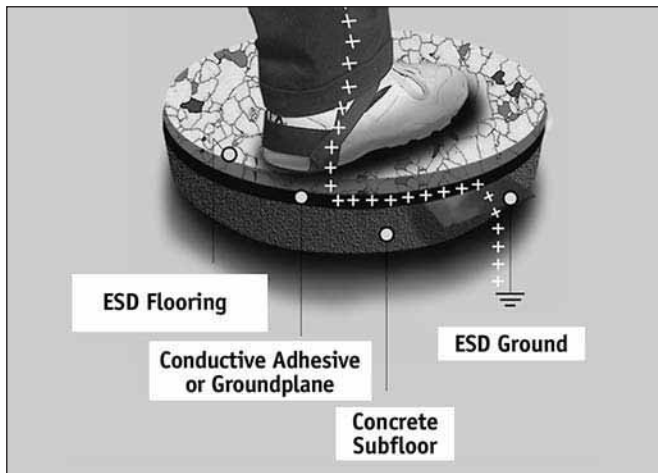

Product No.	Color
Static Dissipative	
8411	Brown
8412	White
8413	Gray
8414	Blue
8415	Green
8416	Maroon
8417	Black
8421	Reverse Brown
8423	Reverse Gray
8424	Reverse Blue
8425	Reverse Green
8427	Reverse Black
Conductive	
8431	Brown
8432	White
8433	Gray
8434	Blue
8435	Green
8436	Maroon
8437	Black
8441	Reverse Brown
8443	Reverse Gray
8444	Reverse Blue
8445	Reverse Green
8447	Reverse Black
Accessories	
8403	Conductive Adhesive. Two-Part Epoxy. (1-gallon unit. covers approx. 135 sq. ft.)
8405	Calcium Chloride Moisture Test Kit.



Static Control Vinyl Floor Tile

“No Wax” ESD Tile

One of the key attributes of 3M™ ESD Vinyl Tile is its ability to be cleaned and maintained with a minimum of cost and effort.

See 3M™ ESD Floor Tile 8400 Series instructions for complete maintenance details.

Unique Cleanability


3M™ ESD Floor Tile 8400 Series can be repeatedly cleaned and then buffed to a high sheen without ever using wax.

With some other ESD tiles, normal cleaning procedures may dull the finish and can even degrade the electrical properties. Conductive wax or glaze must then be used to restore their shine and conductivity. 3M Tiles 8400 Series maintain their electrical properties and can be shined like new with simple buffing. The photos below demonstrate this feature.

The floor section shown is a test patch of 3M™ Static-Dissipative Tile 8412 installed in a high-traffic area of a regional telephone company warehouse. To determine whether the tile could truly withstand serious abuse and then be returned to like new condition with simple cleaning and without wax, the section was intentionally left unattended for 11 months as it was subjected to the wear and grime of continual forklift traffic. The result of this abuse is evident in Photo 1.

After being swept, the tile was scrubbed with neutral cleaner, left to dry, and then buffed according to the maintenance procedure established. As Photos 2 and 3 show, in spite of nearly a year of dramatic abuse, the high gloss of the restored floor finish is similar to that of the tile when it is newly installed—without the use of any kind of wax.

This trial is an impressive demonstration of the durability of the 3M ESD tile and its unique “no wax” feature.



1



2



3

Mechanical Properties (typical)—ESD Tile


Static-Dissipative Floor Tile (Model numbers 8411-8427)	
Conductive Floor Tile (Model numbers 8431-8447)	
Flammability	
Flame Spread Index (ASTM E162/ASTM E84)	Meets Class 1 requirements
Smoke Development (ASTM E84)	Meets Class 1 requirements
Critical Radiant Flux (ASTM E648/NFPA 253)	>1.1 w/cm ²
Physical Specifications	Meets ASTM F1066-99 Meets US Federal Specification SS-T-312B
Hardness (ASTM D 2240)	55 ± 5 Shore D
Flexibility (CSA 126.2) 100 mm mandrel @ 25 C	Does not break
Abrasion Resistance (ASTM D 3389) Taber H22 wheel, 70 rpm	0.445 grams (weight of tile removed per 1000 cycles)
Static Load (ASTM F970) 125 lbs, 0.25 in. diameter indenter foot, 24 hours Residual indentation	2500 PSI point load 3% of tile thickness
700 lbs., 1.125 in. diameter indenter foot, 24 hours Residual indentation	700 PSI point load 1% of tile thickness

Electrical Properties (typical)—ESD Tile

Static-Dissipative	Conductive
Electrical Resistance (Surface-to-ground, ESD S7.1) 1 x 10 ⁶ to 1 x 10 ⁹ ohms	2.5 x 10 ⁴ to 1 x 10 ⁶ ohms
Static Generation (With conductive footwear at 20% RH) <50 volts	<25 volts
Static Decay (Federal TM 101C, Method 4046 @ 15% RH [5000 volts to 0 volts]) <0.10 sec.	<0.03 sec.

Sizes

Static-Dissipative and Conductive
0.125 x 12 x 12 in. (3.2 x 305 x 305 mm)
0.125 x 24.25 x 24.25 in. (3.2 x 615 x 615 mm) -for raised access floor panels
0.125 x 24.25 x 24.25 in. (3.2 x 610 x 610 mm)
0.125 x 36 x 36 in. (3.2 x 915 x 915 mm) -for seamwelded installations

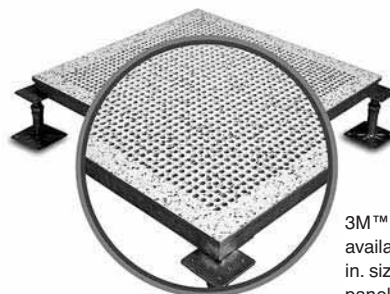

3M™ ESD Floor Tile 8400 Series is available in the special 24.5 in. x 24.5 in. size used for raised access floor panels.



Permanent Flooring Products

Test Your ESD Flooring

Only systematic testing of your static-control flooring products can assure that they are providing the protection you paid for. 3M test equipment will be calibrated and certified on request in a 3M laboratory with NIST Traceable equipment specified in MIL-STD 45662A.



3M™ Test Kit 701

All of the surfacing products in this catalog remove static charges by grounding; their effectiveness is determined by the amount of “surface-to-ground” resistance. The 3M Test Kit 701 meets all the requirements defined in ESD Association Standards S4.1/S7.1 and MIL-PRF-87893 for surface testing methods and equipment. It contains all of the components and instructions needed to properly test the charge-draining capability of any static-control surface, including mats, laminate, tile, epoxy floors, and waxes. The Test Kit 701 comes with all of its components nested in a

foam-lined, molded plastic carrying case, and is designed to be very “user friendly.” The small, lightweight meter is easy to use, with its scales both color-coded and numbered. The meter also includes separate scales for surface resistance measurements, battery testing and continuity testing. The five-pound test weights are covered in a black, anti-static jackets and are fitted with easy-to-grasp handles and conductive silicone-rubber contact pads. The two test leads are insulated with silicone rubber, making them virtually tangle-free in spite of their generous 10-foot length. The right-angle banana plugs at the meter end are designed to seat close to the meter face; at the weight end, the plugs are covered by retractable sheaths for added safety. Use the Test Kit 701 to verify that your 3M static-control surfacing products perform within the resistance values allowable. Your local 3M sales representative is always available to assist you with static-control testing.

The 3M Test Kit 701 includes:

- One Megohmmeter 701
- Two five-pound test weights
- Two 10-foot test leads
- One insulated bulldog clip
- One non-insulated alligator clip
- Two batteries
- One continuity test plate
- Operators manual
- Molded carrying case

For additional information, refer to pages 24, 50, 52.

Tapes

6

To aid in the various processes typical of the electronics industry, 3M has assembled a wide selection of tapes including antistatic utility tapes for use in static sensitive areas, tapes designed for wave soldering applications, foil shielding tapes and other related tapes and accessories.





Tapes

Antistatic Tape

3M™ Antistatic Utility Tape 40 combines 3M's remarkable antistatic adhesive with a clear, one mil polyester film backing, and is perfect for use in static-sensitive areas. In fact, an optional special pattern of ESD symbols alerts users that this is the only tape that should be used in static-safe areas.

At the heart of all 3M antistatic tapes is a unique, conductive polymer adhesive that suppresses static, both during unwind from the roll and during removal from a surface. In fact, they generate less than 50 volts on unwind from the roll or removal from a stainless steel surface, even in extremely dry conditions of 10% relative humidity.

Use Antistatic Utility Tape 40 as a third hand to hold work orders, notes, documentation or instructions in place, to seal static shielding bags and boxes containing electronic components, or to bundle DIP tubes and JEDEC shipping trays. It can also be used to hold down obstructions such as wires or attachments during manufacturing.



3M™ Antistatic Utility Tape 40PR

Product No.	Description			
40/40PR*	3 in. Antistatic Plastic Cores Antistatic Utility Tape.*			
	Widths, in. (mm)		Length, yd. (m)	
	0.25 (6.3)		72	(66)
	0.375 (9.5)		72	(66)
	0.50 (12.7)		72	(66)
	0.625 (15.8)		72	(66)
	0.75 (19.0)		72	(66)
	0.875 (22.2)		72	(66)
	1 (25.3)		72	(66)
	1 in. Antistatic Plastic Cores			
Widths, in. (mm)		Length, yd. (m)		
.50 (12.6)		36	(33)	
.75 (19.0)		36	(33)	

Specify at time of order.
Custom widths available upon request.

*PR designation means printed

Antistatic Utility Tape 40 and 40PR Tape Properties

Property	Test Method	Typical Value
Static Charge Generation		
Removal from Roll, 10% RH, volts	3M	20
Removal from Roll, 50% RH, volts	3M	5
Removal from Stainless Steel, 10% RH, volts	3M	20
Removal from Stainless Steel, 50% RH, volts	3M	5
Surface Resistance		
Adhesive @ 50% RH	ESD S11.11	$5 \times 10^6 \Omega$
Adhesive @ 10% RH	ESD S11.11	$5 \times 10^8 \Omega$
Tape Properties		
Adhesion to Steel	ASTM D1000	19 oz/in.
Unwind Force from Roll	ASTM D1000	24 oz/in.
Thickness	ASTM D1000	2.2 mils
Break Strength	ASTM D1000	20 lb/in.
Slit Width	ASTM D1000	$\pm 1/64$ in.
Rolling Ball Tack	ASTM D1000	70 mm
Outgassing		
TML	ASTM E595	<1.0%
CVCM	ASTM E595	<0.1%
Shelf life	2 years (when stored in original packaging at 50°F (10°C) to 80°F (27°C) at 50% RH maximum.)	



Antistatic Utility Tape Dispenser

The 3M™ Tape Dispenser 620 is designed for use in ESD protected areas. The dispenser is made of conductive and static-dissipative materials which will minimize or eliminate problems associated with conventional dispensers.



3M™ Antistatic Tape Dispenser 620

Tape Dispenser 620 Properties

Property	Typical Value
Body	Stainless steel frame Accepts tape roll up to 2 in. wide. Accepts tape on either 3 in. or 1 in. core. Unit is shipped with 3 in. dissipative drum.
Blade	Stainless Steel Replacement blade
Base	Cast iron Dimensions 5 x 9 in. (13 cm x 23 cm) Weight 7.5 lbs. (3.4 kg)
Accessories	1 in. drum
Decay Time	From 1000V to < 100V less than 2 seconds (3 in. core)
Recommended Tapes	Antistatic Film Tape 40 Low Static Polyimide Film Tape 5419

Product No.	Description
620	Tape Dispenser Drum for Manual Dispenser, 1 in. Manual Dispenser with base Manual Dispenser without base Replacement Blade

Silicone Adhesive Tapes

The 3M™ Polyimide Film Tape 5413 consists of a Kapton® polyimide film and silicone adhesive. It is designed for high temperature applications. Temperature use range is -100° to 500°F (-73°C to 260°C).

3M™ Low Static Polyimide Film Tape 5419 is a translucent, polyimide film-backed silicone adhesive tape with unique and extremely low electrostatic discharge properties. Use the 3M Tape 5419 to mask printed circuit boards during the wave solder or solder dip process.

Product No.	Description														
5413	Polyimide Film Tape. Silicone Adhesive. <table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr> <td>0.50 (1.2)</td> <td>36 (33)</td> </tr> <tr> <td>0.75 (1.9)</td> <td>36 (33)</td> </tr> <tr> <td>1 (2.5)</td> <td>36 (33)</td> </tr> <tr> <td>2 (5.1)</td> <td>36 (33)</td> </tr> </tbody> </table>	Widths, in. (cm)	Length, yd. (m)	0.50 (1.2)	36 (33)	0.75 (1.9)	36 (33)	1 (2.5)	36 (33)	2 (5.1)	36 (33)				
Widths, in. (cm)	Length, yd. (m)														
0.50 (1.2)	36 (33)														
0.75 (1.9)	36 (33)														
1 (2.5)	36 (33)														
2 (5.1)	36 (33)														
5419	Low Static Polyimide Film Tape. Silicone Adhesive. <table border="1"> <thead> <tr> <th>Widths, in. (cm)</th> <th>Length, yd. (m)</th> </tr> </thead> <tbody> <tr> <td>0.25 (0.6)</td> <td>36 (33)</td> </tr> <tr> <td>0.375 (0.9)</td> <td>36 (33)</td> </tr> <tr> <td>0.50 (1.3)</td> <td>36 (33)</td> </tr> <tr> <td>0.75 (1.9)</td> <td>36 (33)</td> </tr> <tr> <td>0.875 (2.2)</td> <td>36 (33)</td> </tr> <tr> <td>1 (2.5)</td> <td>36 (33)</td> </tr> </tbody> </table>	Widths, in. (cm)	Length, yd. (m)	0.25 (0.6)	36 (33)	0.375 (0.9)	36 (33)	0.50 (1.3)	36 (33)	0.75 (1.9)	36 (33)	0.875 (2.2)	36 (33)	1 (2.5)	36 (33)
Widths, in. (cm)	Length, yd. (m)														
0.25 (0.6)	36 (33)														
0.375 (0.9)	36 (33)														
0.50 (1.3)	36 (33)														
0.75 (1.9)	36 (33)														
0.875 (2.2)	36 (33)														
1 (2.5)	36 (33)														
Shelf life	To obtain best performance, use this product within 12 months from date of manufacture and store under normal conditions of 60°F to 80°F (15° to 21°C) and 40 to 50% R.H. in the original carton.														



Tapes

Water Soluble Tape

3M™ Water Soluble Wave Solder Tape 5414 has a poly-vinyl alcohol backing which is water soluble, and a synthetic water soluble adhesive. This tape is designed to mask gold fingers on printed circuit boards during wave soldering.

Product No.	Description			
5414	Water Soluble Wave Solder Tape.			
	Widths, in. (cm)		Length, yd. (m)	
	0.50	(1.3)	36	(33)
	0.75	(1.9)	36	(33)
	1	(2.5)	36	(33)
Shelf life	To obtain best performance, use this product within 12 months from date of manufacture and store under normal conditions of 60°F to 80°F (15° to 21°C) and 40 to 50% R.H. in the original carton.			

Die-Cut Circles are also available. Circles are 0.50 in. in diameter. 1000/roll.

Vinyl Tape

3M™ Vinyl Tape 471 is a conformable colored (nine colors plus transparent) vinyl backing with a rubber adhesive ideal for many lane and safety markings, color coding, abrasion protection, masking, sealing, splicing and other general purpose applications. The tape's pigmented backings maintain their vivid colors even when exposed to heavy abrasion. Sharper colors for color coding or marking systems draw attention and help enhance plant safety. Dead stretch properties provide straighter lines when masking, marking and sealing.

Product No.	Description			
471	Plastic Film Tape, Black			
	Widths, in. (cm)		Length, yd. (m)	
	0.50	(1.2)	36	(33)
	0.75	(1.9)	36	(33)
	1	(2.5)	36	(33)
	1.5	(3.8)	36	(33)
	2	(5.0)	36	(33)
	3	(7.6)	36	(33)
	4	(10.1)	36	(33)
	Plastic Film Tape, Blue			
	Widths, in. (cm)		Length, yd. (m)	
	0.25	(6.3)	36	(33)
	0.50	(1.2)	36	(33)
0.75	(1.9)	36	(33)	
1	(2.5)	36	(33)	
1.5	(3.8)	36	(33)	
2	(5.0)	36	(33)	
3	(7.6)	36	(33)	
Plastic Film Tape, Red				
Widths, in. (cm)		Length, yd. (m)		
0.25	(6.3)	36	(33)	
0.375	(6.3)	36	(33)	
0.50	(1.2)	36	(33)	
0.75	(1.9)	36	(33)	
1	(2.5)	36	(33)	
1.5	(3.8)	36	(33)	
2	(5.0)	36	(33)	
3	(7.6)	36	(33)	
4	(10.1)	36	(33)	
Plastic Film Tape, White				
Widths, in. (cm)		Length, yd. (m)		
0.25	(6.3)	36	(33)	
0.375	(6.3)	36	(33)	
0.50	(1.2)	36	(33)	
0.75	(1.9)	36	(33)	
1	(2.5)	36	(33)	
1.5	(3.8)	36	(33)	
2	(5.0)	36	(33)	
3	(7.6)	36	(33)	
4	(10.1)	36	(33)	



EMI Shielding Tapes

3M™ EMI Shielding Tapes are designed for applications requiring reliable point-to-point electrical contact, particularly EMI shielding, grounding and static charge draining. The tapes have a multitude of uses in electronic design and test laboratories for prototyping, design and troubleshooting.



3M™ Foil Shielding Tape Engineering Kit

The Engineering Kit enables engineers who need only a few inches of a particular tape for specifying, prototyping, troubleshooting, testing and repairing to avoid the problems and expense associated with meeting minimum order quantities. The kit also eliminates the problem of rolls of tape lost between multiple users or kept loose in desk drawers.

The compact dispenser box also serves as a desktop reference for the tapes. The box panels provide basic technical information about each tape, including product number, backing and adhesive type and thickness, adhesion, resistance and shielding effectiveness.

Engineering Kit for Foil Shielding Tapes

Engineering Kit: Kit includes one roll of each foil tape, 3/4 in. x 4 yds. (1.9 cm x 8.3 m)

Dispenser box is 4 in. x 4 in. x 8.5 in. (10.0 cm x 10.0 cm x 21.3 cm)

Product No.	Description
1120	Smooth aluminum foil, conductive acrylic adhesive, 4.0 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 36 (33)
	0.875 (2.22) 36 (33)
	0.75 (1.9) 36 (33)
	0.625 (1.5) 36 (33)
	0.50 (1.2) 36 (33)
0.375 (9.5) 36 (33)	
0.25 (6.3) 36 (33)	
1125	Smooth copper foil, acrylic adhesive, 3.5 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 36 (33)
	0.875 (2.22) 36 (33)
	0.75 (1.9) 36 (33)
	0.625 (1.5) 36 (33)
	0.50 (1.2) 36 (33)
0.375 (0.9) 36 (33)	
0.25 (0.6) 36 (33)	
1126	Smooth copper foil, conductive acrylic adhesive, 3.5 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 36 (33)
	0.875 (2.22) 36 (33)
	0.75 (1.9) 36 (33)
	0.625 (1.5) 36 (33)
	0.50 (1.2) 36 (33)
0.375 (0.9) 36 (33)	
0.25 (0.6) 36 (33)	

Product No.	Description
1170	Smooth aluminum foil, conductive acrylic adhesive, 3.2 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 18 (16.5)
	0.875 (1.5) 18 (16.5)
	0.75 (1.9) 18 (16.5)
	0.625 (1.5) 18 (16.5)
	0.50 (1.2) 18 (16.5)
0.375 (9.5) 18 (16.5)	
0.25 (6.3) 18 (16.5)	
1181	Smooth copper foil, conductive acrylic adhesive, 2.6 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 18 (16.5)
	0.875 (1.5) 18 (16.5)
	0.75 (1.9) 18 (16.5)
	0.625 (1.5) 18 (16.5)
	0.50 (1.2) 18 (16.5)
0.375 (9.5) 18 (16.5)	
0.25 (6.3) 18 (16.5)	
1182	Smooth copper foil coated on both sides, conductive acrylic adhesive, 3.5 mil total, supplied with liner on each side.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 18 (16.5)
	0.75 (1.9) 18 (16.5)
	0.625 (1.5) 18 (16.5)
	0.50 (1.2) 18 (16.5)
	0.375 (9.5) 18 (16.5)
0.25 (6.3) 18 (16.5)	
1183	Smooth tin-plated copper foil, conductive acrylic adhesive, 2.6 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 18 (16.5)
	0.75 (1.9) 18 (16.5)
	0.625 (1.5) 18 (16.5)
	0.50 (1.2) 18 (16.5)
	0.375 (9.5) 18 (16.5)
0.25 (6.3) 18 (16.5)	
1194	Smooth copper foil, nonconductive acrylic adhesive, 3.0 mil total, supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 36 (33)
	0.75 (1.9) 36 (33)
	0.50 (1.2) 36 (33)
	0.375 (9.5) 36 (33)
	0.25 (6.3) 36 (33)
1245	Embossed copper foil, nonconductive acrylic adhesive, 4.0 mil total, conductivity "through the adhesive," supplied on liner.
	Widths, in. (cm) Length, yd. (m)
	1 (2.5) 18 (16.5)
	0.875 (1.5) 18 (16.5)
	0.75 (1.9) 18 (16.5)
	0.625 (1.5) 18 (16.5)
	0.50 (1.2) 18 (16.5)
0.375 (9.5) 18 (16.5)	
0.25 (6.3) 18 (16.5)	



Tapes

EMI Shielding Tapes

Product No.	Description	
1267	Embossed aluminum foil, nonconductive acrylic adhesive, 5.0 mil. total, conductivity "through the adhesive," supplied on liner.	
		Widths, in. (cm) Length, yd. (m)
		1 (2.5) 18 (16.5)
		0.875 (1.5) 18 (16.5)
		0.75 (1.9) 18 (16.5)
		0.625 (1.5) 18 (16.5)
		0.50 (1.2) 18 (16.5)
		0.375 (9.5) 18 (16.5)
0.25 (6.3) 18 (16.5)		
1345	Embossed tin-plated copper foil, nonconductive acrylic adhesive, 4.0 mil. total, conductivity "through the adhesive," supplied on liner.	
		Widths, in. (cm) Length, yd. (m)
		1 (2.5) 18 (16.5)
		0.75 (1.9) 18 (16.5)
		0.625 (1.5) 18 (16.5)
		0.50 (1.2) 18 (16.5)
		0.375 (9.5) 18 (16.5)
		0.25 (6.3) 18 (16.5)

All tapes are furnished on 3 in. (7.6 cm) I.D. cores.
 Minimum width is 1/4 in. (0.6 cm). Maximum width is 23 in. (58 cm).



Static Control Measures for Handling Electronic Parts


Why should I care about Electrostatic Discharge?

Electrostatic discharge (ESD) costs the electronics industry millions of dollars annually in damaged and degraded parts. A study in Semiconductor Reliability News estimated that approximately 60% of device failures are EOS/ESD caused.

What Is ESD?

The contact and separation of materials creates a static charge. An example of a common electrostatic event occurs when a charged individual discharges to a doorknob.

The contact and separation of feet when walking across a floor creates a charge on the individual. The discharge to the doorknob is an example of an electrostatic discharge. The simple act of walking across a floor can generate 15,000 volts of static electricity.

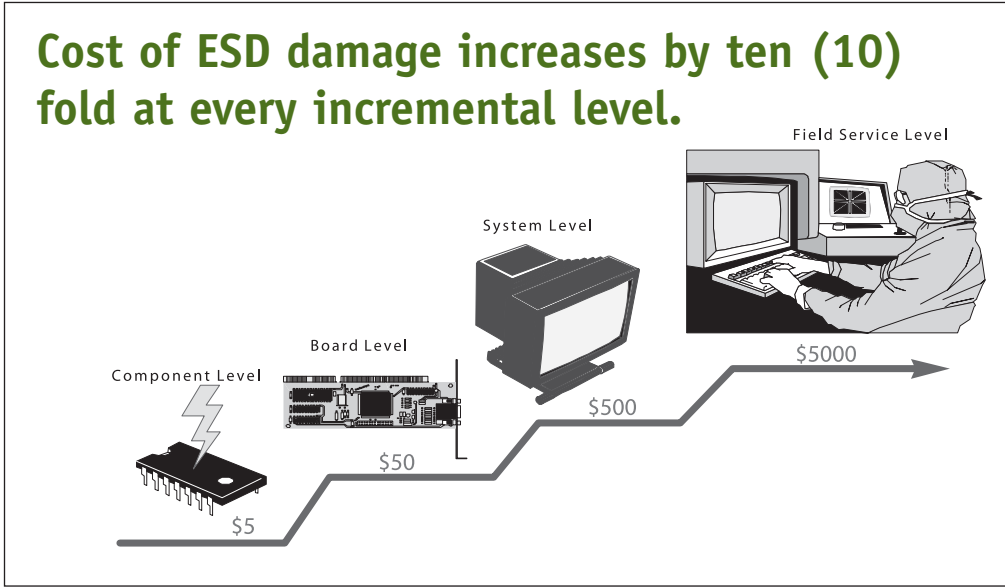

Human Awareness Levels

- We feel the discharge if it is greater than 3,500 volts.
- We hear the discharge if it is greater than 5,000 volts.
- We see the discharge if it is greater than 8,000 volts.
- By comparison, integrated circuits that are used to make electronic circuit boards can be damaged by voltages as low as 100 to 1,000 volts.

What is Device Sensitivity?

Once a charge is generated, a charge can be induced from one object onto another. This is called charge transfer. The damage is a result of energy shifting from one charged object to another object. Static sensitive devices are subject to damage or degradation from Electrostatic Discharge (ESD). Damage occurs because small traces and materials cannot withstand the amount of energy surge introduced by an electrostatic field or discharge. Damage and degradation can also result from an electrostatic field.

Typical Electrostatic Voltages

Event	Voltages at Relative Humidity		
	10%	40%	55%
Walking Across Carpet	35,000	15,000	7,500
Walking Across Vinyl Floor	12,000	5,000	3,000
Motions of Individuals Not Grounded	6,000	800	400
Remove Bubble Pack from Package	26,000	20,000	7,000



Static Control Measures

Device Sensitivity Threshold Levels

Generally, device sensitivity threshold levels are well below a person's ability to detect.

<u>Device Type</u>	<u>Threshold Susceptivity (Volts)</u>
MOSFET	10-100
VMOS	30-1800
NMOS	60-100
GaAsFET	60-2000
EPROM	100+
CMOS	200-3000
JFET	140-7000
SAW	150-500
Op-AMP	190-2500
Schottky Diodes	300-2500
Film Resistors	300-3000
Bipolar Resistors	300-7000
ECL	500+
SCR	500-1000
Schottky TTL	500-2500

Where Do You Need Static Protection?

- Incoming inspection and test
- Stores and storage
- Transfer carts
- Kitting
- Manual and automated insertion
- Wave soldering
- Equipment assembly and test
- Packaging and shipping
- Repair stations

Ordering Information

For your nearest distributor, to order or to request an MSDS, call:

Phone: (800) 328-1368

Fax: (512) 984-5675

Fax: (800) 858-9136

International Information

Alaska

3M Alaska
11151 Calaska Circle
Anchorage, Alaska 99515-2900
Telephone: 907-522-5200
Fax: 907-522-1645

Argentina

3M Argentina S.A.C.I.F.I.A.
Olga Cossetini 1031
Puerto Madero
Ciudad de Buenos Aires
Argentina
Telephone: 011-54-11-339-2400
Fax: 011-54-11-339-2622

Australia

3M Australia Pty., Ltd.
950 Pacific Highway
Pymble, N.S.W. 2073
Australia
Telephone: 011-61-2-9498-9333
Fax: 011-61-9498-9666

Austria

3M Oesterreich GmbH.
Brunner Feldstrasse 63
A-2380 Perchtoldsdorf
Austria
Telephone: 011-43-1-86-686-0
Fax: 011-43-1-86-686-242

Belgium

3M Belgium N.V./S.A.
Hermeslaan 7
B-1831 Diegem
Belgium
Telephone: 011-32-2-722-5111
Fax: 011-32-2-720-0225

Bolivia

3M Bolivia Branch
Celle Republicuetas 524
Santa Cruz de la Sierra
Bolivia
Telephone: 591-3-3331524
Fax: 591-3-3331503

Brazil

3M do Brasil Ltda.
Via Anhanguera, Km. 110
13181-900, Sumare, Sao Paulo
Brasil
Telephone: 011-55-19-3838-7000
Fax: 011-55-19-3838-6606

Canada

3M Canada Company
1840 Oxford Street East
London, Ontario N5V 3R6
Canada
Telephone: 519-451-2500
Fax: 519-452-6262

Chile

3M Chile, S.A.
Avda. Santa Isabel 1001
Providencia
Santiago, Chile 6641431
Telephone: 011-56-2-410-3000
Fax: 011-56-2-600-300-3636

China

3M China Ltd.
General Office
38/F, Maxdo Centre
8 Xing Yi Road
Shanghai 200336
P.R.C.
Telephone: 011-021-6275-3535
Fax: 011-021-6275-2343

Colombia

3M Colombia S.A.
Administration Center
Apartado Aereo 11091
Avenida El Dorado No. 75-93
Bogota
Colombia
Telephone: 011-57-1-416-1655
Fax: 011-57-1-416-1677

Costa Rica

3M Costa Rica, S.A.
Carretera a Heredia,
de la Estacion de Pesaje
La Valencia 1 Km.
Este Carretera a Santa
Rosa de Santo Domingo
San Jose
Costa Rica
Telephone: 011-506-277-1000
Fax: 011-506-260-3838

Czech Republic

3M Cesko
Vyskocilova 1
140 00 Praha 4,
Czech Republic
Telephone: 011-420-2-61-380-111
Fax: 011-420-2-61-380-110

Denmark

3M a/s
Fabriksparken 15
DK-2600 Glostrup
Denmark
Telephone: 011-45-43-48-0100
Fax: 011-45-43-96-8596

Dominican Republic

3M Dominicana S.A.
Ave. Luperon
Zona Industrial de Herrera
Santo Domingo
Dominican Republic
Telephone: 809-530-6560
Fax: 809-530-2960

Ecuador

3M Ecuador CA
K. 1.5 Via Duran Tambo
Guayaquil
Ecuador
Telephone: 011-593-2-800-777
Fax: 011-593-2-2504-406

Egypt

3M Egypt Trading Ltd.
Sofitel Towers 19th Floor
Corniche el-Nil St.
Maadi, Cairo
Egypt
Telephone: 011-202-525-9007
Fax: 011-202-525-9004

El Salvador

3M El Salvador, S.A. de C.V.
Calle Chaparrastique No. 11
Urbanizacion Industrial Santa
Elena
Antiguo Cuscatlan, La Libertad
San Salvador, El Salvador
Telephone: 011-503-2210-0888
Fax: 011-503-2278-3313

Finland

Suomen 3M Oy
Lars Sonckin kaari 6
02600 Espoo
Finland
Telephone: + 358-9-52-521
Fax: + 358-9-512-29-44

France

Head Office 3M France
Boulevard de L'Oise
95006 Cergy Pontoise Cedex
France
Telephone: 011-331-1-30-31-61-61
Fax: 011-33-1-30-31-74-26

Germany

3M Deutschland GmbH
Carl-Schurz-Strasse 1
D-41453 Neuss
Germany
Telephone: 011-49-2131-143000
Fax: 011-49-2131-142649

Greece

3M Hellas Ltd.
Kifissias 20, 151 25 Maroussi
Athens
Greece
Telephone: 011-30210-688-5300
Fax: 011-30210-684-3281

Guam

3M Company
Building 14
171 Guerrero Drive
Tamuning, Guam 96911
Telephone: 011-671-646-9161
Fax: 011-671-646-7114

Guatemala

3M Guatemala, S.A.
Km. 13 Calzada Roosevelt 12-33,
Zona 3 de Mixco
Guatemala City
Guatemala
Telephone: 011-502-2379-3636
Fax: 011-502-2379-3629

Hawaii

3M Hawaii
4443 Malaai Street
Honolulu, Hawaii 96818
Telephone: 808-422-2721
Fax: 808-422-9557

Honduras

3M Guatemala S.A.
(Honduras Branch)
Blvd. del Norte Contiguo Plaza
Sevilla, Col. Colvisula
San Pedro Sula
Honduras
Telephone: 011-504-551-8777
Fax: 011-504-551-8779

Hong Kong

3M Hong Kong Ltd.
5th Floor, Victoria Centre
15 Watson Road
Hong Kong
Telephone: 011-852-2806-6111
Fax: 011-852-2807-1308

Hungary

3M Hungaria Kft
Vaci ut 140
1386 Budapest, Pf. 905
Hungary
Telephone: 011-36-1-270-7777
Fax: 011-36-1-320-0951

India

3M Ltd. Bangalore
Raheja Paramount
138 Residency Road,
Bangalore 560 025
India
Telephone: 011-91-80-223-1414
Fax: 011-91-80-233-1450

Indonesia

PT 3M Indonesia
Plaza DM, 4th Floor
Jl. Jenderal Sudirman Kav 25
Jakarta 12920
Indonesia
Telephone: 011-62-21-5203401
Fax: 011-62-5203106

Ireland

3M Ireland
3M House
Adelphi Centre
Dun Laoghaire
Co. Dublin
Ireland
Telephone: 011-353-1-280-3555
Fax: 011-353-1-280-3509

Israel

3M Israel Ltd.
91 Medinat Ha'yehudim Street
46120 Herzlia
Israel
Telephone: 972-9-9615000
Fax: 972-9-9615050

Italy

3M Italia S.p.A.
Via San Bovio 3
20090 Milano S. Felice
Segrate-Milan
Italy
Telephone: 011-39-2-70351
Fax: 011-39-02-7035 3076

Jamaica

3M Interamerica, Inc.
(Jamaica Division)
218 Marcus Garvey Drive
Kingston 11
Jamaica
Telephone: 809-937-3859
Fax: 876-937-4369

Japan

33-1 Tamagawadai 2-chome
Setagaya-ku, Tokyo
158-8583 Japan
Telephone: 011-81-3-3709-8111
Fax: 011-81-3-5717-3509

Kenya

3M Kenya Ltd.
Alpha Center
off Mombasa Road
Nairobi
Kenya
Telephone: 011-254-20-351621
Fax: 011-254-20-825199

Korea

3M Korea Ltd.
22nd/FI Daehan Investment Trust
Bldg.
27-3 Yoido-dong
Yongdungpo-ku
Seoul 150-010
Korea
Telephone: 011-82-2-3771-4114
Fax: 011-82-2-761-6393

Malaysia

3M Malaysia Sdn. Berhad
Bangunan 3M,
No. 6, Persiaran Tropicana,
47410 Petaling Jaya,
Selangor Darul Ehsan
Malaysia
Telephone: 011-60-3-7806-2888
Fax: 011-60-3-7806-2902

Mexico

3M Mexico S.A. de C.V.
Avenida Santa Fe 55
Col. Santa Fe C.P. 01210
Mexico
Telephone: 011-52-55-5270-0400
Fax: 011-52-55-5270-2299

Morocco

3M Maroc
Residence les Alizes
la Colline II, Lot. N33
RdC, Sidi Maarouf
Morocco
Telephone: 011-212-22-977-977
Fax: 011-212-22-33-57-84

Netherlands

3M Nederland B.V.
Industrieweg 24
2382 NW Zoeterwoude
Netherlands - Europe
Telephone: 011-31-71-5-450-450
Fax: 011-31-71-5-450-212

New Zealand

3M New Zealand Ltd.
250 Archers Road
Glenfield, Auckland 10
New Zealand
Telephone: 011-64-9-444-4760
Fax: 011-64-9-444-2773

Nicaragua

3M Nicaragua
Km. 5 Carretera Norte
Managua, Nicaragua
Nicaragua
P.O. Box A-119
Managua, Nicaragua, C.A.
Telephone: 011-505-248-6502
Fax: 011-505-248-6504

Norway

3M Norge A/S
Hvamveien 6
Postboks 100, N-2026 Skjetten
Norway
Telephone: 011-47-63-84-75-00
Fax: 011-47-63-84-17-88

Pakistan

3M Pakistan (PVT) Ltd.
Islamic Chamber of Commerce
Bldg
ST-2/A, Block 9
KDA Scheme 5
Clifton - Karachi
75600
Pakistan
Telephone: 011-92-21-111-2255-36
Fax: 011-92-21-587-7865

Panama

3M Panama S.A.
Via Ricardo J. Alfaro
Villa de las Fuentes, Edif. 3M
Panama
Telephone: 011-507-236-5222
Fax: 011-507-236-6277

Paraguay

3M Sucursal Paraguay S.A.
Cap. Motta 297 Esq. Guido Spano
Asuncion
Paraguay
Cap. Motta 297 Esq. Guido Spano
Asuncion
Paraguay
Telephone: 011-595-21-612-076
Fax: 011-595-21-607-245

Peru

3M Peru, S.A.
Av. Canaval y Moreyra 641
San Isidro, Lima 27
Peru
Telephone: 011-51-1-224-2728
Fax: 011-51-1-224-3171

Philippines

3M Philippines, Inc.
EPCI Bank Tower 2-18th Floor
2 Makati Avenue
Makati City 1200
Philippines
Telephone: 011-63-2-813-3781
Fax: 011-63-2-814-5872

Poland

3M Poland Sp. z.o.o.
al. Katowicka 117,
Kajetany K. Warszawy
05-830 Nadarzyn
Poland
Telephone: 011-48-22-739-60-00
Fax: 011-48-22-739-60-01

Portugal 3M

Portugal, Lda
Rua do Conde de Redondo 98
1169-009 Lisboa
Portugal
Telephone: 011-351-2-131-34-500
Fax: 011-351-2-131-34-860

Puerto Rico

3M Puerto Rico, Inc.
350 Chardon Ave., Suite 1010
San Juan, PR 00918
Puerto Rico
Telephone: 787-620-3000
Fax: 787-620-3019

Romania

3M Romania, S.R.L.
World Trade Center
Piata Montreal 10, Sector 1
011469 Bucharest
Romania
Telephone: 011-40-21-202-8000
Fax: 011-40-21-317-3184

Russia

3M Russia
Meridian Commercial Tower
24/D Ulitsa Smolnaya
Moscow 125445
Russia
Telephone: 7-095-784-74-74
Fax: 7-095-784-74-75

Singapore

3M Singapore Pte. Ltd.
9 Tagore Lane
Singapore 787472
Telephone: 011-65-6454-8611
Fax: 011-65-6552-2113

South Africa

3M South Africa (Pty.) Ltd.
146a Kelvin Drive
Woodmead
South Africa
Telephone: 011-27-11-806-2000
Fax: 011-27-11-806-2440

Spain

3M Espana, S.A.
Juan Ignacio Luca de Tena, 19-25
Madrid 28027
Spain
Telephone: 011-34-91-321-6000
Fax: 011-35-1-321-6002

Sri Lanka

3M Lanka (Private) Limited
754 New Parliament Road
Pelawatte
Battaramulla
Sri Lanka
Telephone: 011-94-11-278-5701
Fax: 011-94-11-441-0084

Sweden

3M Svenska AB
Bollstanäsvägen 3
S-191 89 Sollentuna
Sweden
Telephone: 011-46-8-92-2100
Fax: 011-46-8-754-5537

Switzerland

3M (Schweiz) AG
Eggstrasse 93
CH-8803 Rüschlikon
Switzerland
Telephone: 011-41-44-724-9090
Fax: 011-41-44-724-9450

Taiwan

3M Taiwan Ltd.
6F, No. 95 Dunhua S. Rd.
Sec. 2
Taipei, 10628 Taiwan
Telephone: 011-886-2-2704-9011
Fax: 011-886-2-2706-0383

Thailand

3M Thailand Ltd.
12th Floor, Sermit Tower
159 Asoke Road (Sukhumvit 21)
Bangkok 10110
Thailand
Telephone: 011-662-260-8577
Fax: 011-662-261-7535

Trinidad

3M Interamerica, Inc.
(Trinidad & Tobago Division)
1 Jerningham Avenue
Belmont
Port of Spain, W.I.
Trinidad
Telephone: 011-868-623-8917
Fax: 011-868-623-3079

Turkey

3M Sanayii ve Ticaret A.S.
Nispetiye Cad. Akmerkez
Blok 3K: 5/6
80600 Etiler
Istanbul, Turkey
Telephone: 00 90-212-350-77 77
Fax: 00 90-212-282-17 43

United Arab Emirates

(3M Gulf)
3M Gulf Ltd.
3rd Floor, Building No. 11
Dubai Internet City
Dubai,
United Arab Emirates
Telephone: 971-4-3670777
Fax: 971-4-3670755

United Kingdom

3M United Kingdom PLC
3M Centre
Cain Road
Bracknell, Berkshire RG12 8HT
England
United Kingdom
Telephone: 011-44-1334-858000
Fax: 011-44-1344-858278

Uruguay

3M Uruguay S.A.
Bvar. Artigas 1247
Esq. Charrua
11200 Montevideo
Uruguay
Telephone: 011-598-2-409-3341
Fax: 011-598-2-409-3913

Venezuela

3M Manufacturera Venezuela S.A.
Final Avenida Tamanaco
con Sorocaima
Centro Empresarial El Rosal,
Piso 6,
El Rosal, Chacao, Caracas 1060
Venezuela
Telephone: 011-58-2-12-957-8111
Fax: 011-58-2-12-951-5993

Vietnam

3M Vietnam Ltd.
34 Tran Quoc Thao St.
Ward 7, District 3
Ho Chi Minh City
S.R. Vietnam
Telephone: 011-84-8-930-2044
Fax: 011-84-8-930-2043

Zimbabwe

3M Zimbabwe (Pvt.) Ltd.
23 George Drive
Beverly East, Amby
Msasa,
Harare
Zimbabwe
Telephone: 011-263-4-486585/6/7
Fax: 011-263-4-486385

Product Index

Adjustable Fabric Wrist Straps	2
Adjustable Thermoplastic Wrist Straps.	3
Air Ionizer Tester/Field Meter and Charger	33, 57
Antistatic Tape	68
Antistatic Utility Tape Dispenser	69
Benchtop Air Ionizers	31
Charge Analyzer	48, 51, 52, 61
Clean Walk Mats	21
Conductive Bags and Drum Liners.	41
Conductive Film and Tubing.	40
Conductive Floor Mats	18
Connector Covers	43, 44
Containers.	46
Cushioned Static Shielding Wrap	38
Data Logging Software	55
Disposable Shoe Grounding Assembly.	6
Disposable Wrist Straps.	5
Dissipative Hard Laminate Sheets	19
Dissipative Rigid Worksurfaces	19
Dissipative Rubber Mats and Runners	17
Dissipative Vinyl Three-Layer Mats and Runners.	16
Dual Conductor Fabric Wrist Straps for Monitors.	14
Dual Conductor Metal Wrist Straps for Monitors	14
Dual Conductor Portable Wrist Strap Monitor.	11
Dual Conductor Remote Input Jacks	13
Dual Conductor Wrist Bands.	14
Dual Conductor Wrist Strap Ground Cords	15
EMI Shielding Tapes.	71, 72
Epoxy Flooring System.	64, 65
ESD Training	60
Field Service Kits	22, 23
Fixed Size Metal Wrist Straps.	2
Heel Grounding Assembly	7
High Performance Scotch-Brite™ Cloth	28

Ionized Air Gun	30
Labels	45
Low Static Tape	69
Mini Air Ionizer	32
Moisture Vapor Barrier Bag	39
Monitor Stand-By Jack	13
Monitor Verification Kits.	12
Monitor/Table Mat Replacement Cord.	13
Novec™ Aerosol Cleaners.	20, 21
Overhead Air Ionizer	29
Portable Field Service Kit.	22, 23
Rubber Adhesive Tapes	75
Shoes/Wrist Strap Tester	54
Silicone Adhesive Tapes	69
Single Card Carriers.	42
Single Device Carrier	42
Static Control Vinyl Floor Tile	64, 65
Static Monitor	9, 10
Static Sensor.	33, 57
Static Shielding Bags.	36, 37, 38
Telecommunications Field Service Kit.	22
Test Equipment	47
Test Kits for Static Control Surfaces/Flooring.	24, 48, 50, 66
Toe Grounding Assembly	6
Training	59
Vinyl Tape	70
Water Soluble Tape	70
Workstation Grounding Kits	20
Worksurface Cleaning Products	21
Wrist Strap Ground Cords.	4
Wrist Strap Tester.	53
Wrist Strap and Footwear Tester.	54

Product Numbers

40/40PR Antistatic Tape	68
471 Vinyl Tape.	70
620 Antistatic Utility Tape Dispenser	69
701 Test Kit for Static Control Surfaces	24, 48, 50, 66
701-L Test Leads	24, 50
701-M Megohmmeter	24, 50
701-W 5 lb. Test Weight	24, 50
711 Charge Analyzer.	48, 51, 52, 61
718 Static Sensor.	33, 57
718A Air Ionizer Test Kit	33, 48, 57
723 Accessory Belt Clip	11, 25
724 Continuous Workstation Monitor	10, 48
724P Power Supply	25
724VK Verification Kit.	12, 25
725 Wrist Strap Monitor	11, 49
725VK Verification Kit.	12, 25
732 Replacement Remote Input Jack	13, 25
733 Remote Splitter Kit.	13, 25
740 Wrist Strap and Footwear Tester	49, 56
740P Power Supply	25
741 Shoe Electrode	56

746 Wrist Strap Tester	49, 53
747 Shoes/Wrist Strap Tester	49, 54
747DLS Data Logging Software	33
790 Static Monitor.	9, 49
790AC AC Adapter	9
790MP Mounting Plate for 790.	9
790P Power Supply	25
790VK Verification Kit.	9, 12, 25
960 Mini Air Ionizer	32
960X/980X Replacement Wall Transformer	32
963 Benchtop Air Ionizer	31
963E Benchtop Air Ionizer	31
980 Ionized Air Gun	30
980E Ionized Air Gun – European version	30
980E-X Replacement Wall Transformer.	30
980F Replacement Air Filters	30
980T Replacement Nozzle Tip	30
990 Overhead Air Ionizer	29
990F Overhead Air Ionizer	29
1120 Smooth Aluminum Foil Tape.	71
1125 Smooth Copper Foil Tape.	71

1126 Smooth Copper Foil Tape	71	3042 Wrist Strap Grounding System	26
1170 Smooth Aluminum Foil Tape	71	3043 Interconnect Cord	26
1181 Smooth Copper Foil Tape	71	3047 Common Point Grounding System	27
1182 Smooth Copper Foil Tape	71	3048 Grounding System for Wrist Strap/Table Mat	27
1183 Smooth Tin-Plated Copper Foil Tape	71	3050 Snap Fastener	27
1194 Smooth Copper Foil Tape	71	3051 Ground Cord	27
1245 Embossed Copper Foil Tape	71	3057 Stand By Jack	9, 13, 27
1267 Embossed Aluminum Foil Tape	72	3370 Moisture Vapor Barrier Bag	39
1345 Embossed Tin-Plated Copper Foil Tape	72	4011 Round Container	46
1704 Conductive Film, 4.0 Mil	40	4012 Round Container	46
1706 Conductive Film, 6.0 Mil	40	4013 Round Container	46
1708 Conductive Film, 8.0 Mil	40	4014 Round Container	46
1724 Lay Flat Conductive Tubing, 4.0 Mil	40	4015 Round Container	46
1764 Conductive Film, 4.0 Mil	40	4021 Hinged Container	46
1864 Floor Mat	18	4022 Hinged Container	46
1864R Floor Runner	18	4023 Hinged Container	46
1900 Metal-In Static Shielding Bag	36	4024 Hinged Container	46
1910 Metal-In Static Shielding Bag w/Zipper Closure	36	4025 Hinged Container	46
2004 Conductive Conductive Bags	41	4270 Connector Covers	43, 44
2011 Scotch-Brite™ High Performance Cloths	28	4610 Ground Cord	3, 4
2014 Conductive Drum Liners	41	4611 Ground Cord	3, 4
2044 Economy Shoe Grounding Assembly	7	4620 Wrist Band	3
2045 Disposable Shoe Grounding Straps	6	4650 Wrist Band	3
2051 Economy Shoe Grounding Assembly	7	4720 Dual Conductor Wrist Band	15
2053 Toe Grounding Assembly	6	5413 Polyimide Film Tape	69
2056 Economy Non-marking Shoe Grounding Assembly	7	5414 Water Soluble Wave Solder Tape	70
2100R Metal-Out Static Shielding Bag	37	5419 Low Static Polyimide Film Tape	69
2110R Metal-Out Static Shielding Bag w/Zipper Closure	37	5701 Single Device Carrier	42
2120R Cushioned Static Shielding Bags	38	5830 Clean Walk Mats	21
2126R Cushioned Static Shielding Wrap	38	7101 Labels	45
2204 Adjustable Fabric Wrist Band	2	7102 Labels	45
2205 Metal Wrist Bands	2	7201 Labels	45
2206 Metal Wrist Bands	2	7202 Labels	45
2207 Metal Wrist Bands	2	7203 Labels	45
2209 Disposable Wrist Strap	5	7204 Labels	45
2210 Ground Cord	4	8001 Cleaner for Static Control Mats	21, 27
2214 Fabric Wrist Band with Coiled Cord	2	8021 Table and Floor Mat	20
2220 Ground Cord	4	8023 Table and Floor Mat	20
2224 Fabric Wrist Band with Coiled Cord	2	8024 Table and Floor Mat	20
2271 Economy Adjustable Fabric Wrist Band	2	8031 3-Layer Table Mat	20
2272 Economy Adjustable Wrist Band	2	8033 3-Layer Table Mat	20
2360 Dual Conductor Coiled Cord	14, 15	8034 3-Layer Table Mat	20
2368 Dual Conductor Adjustable Fabric Wrist Band	14	8201 Dissipative Vinyl Three Layer Floor Mat, Brown	16
2368VM Dual Conductor Adjustable Fabric Wrist Band	14	8203 Dissipative Vinyl Three Layer Floor Mat, Gray	16
2370 Dual Conductor Coiled Cord	14, 15	8204 Dissipative Vinyl Three Layer Floor Mat, Blue	16
2371 Dual Conductor Coiled Cord	14, 15	8211 Dissipative Vinyl Three Layer Floor Mat, Brown	16
2380 Monitor/Table Mat Replacement Cord	13, 26	8213 Dissipative Vinyl Three Layer Floor Mat, Gray	16
2381 Dual Conductor Metal Wrist Strap	14	8214 Dissipative Vinyl Three Layer Floor Mat, Blue	16
2381VM Dual Conductor Metal Wrist Strap	14	8251 Dissipative Vinyl Three Layer Floor Mat, Brown	16
2382 Dual Conductor Metal Wrist Strap	14	8253 Dissipative Vinyl Three Layer Floor Mat, Gray	16
2382VM Dual Conductor Metal Wrist Strap	14	8254 Dissipative Vinyl Three Layer Floor Mat, Blue	16
2383 Dual Conductor Metal Wrist Strap	14	8261 Dissipative Vinyl Three Layer Floor Mat, Brown	16
2383VM Dual Conductor Metal Wrist Strap	14	8263 Dissipative Vinyl Three Layer Floor Mat, Gray	16
2384 Dual Conductor Metal Wrist Band	14	8264 Dissipative Vinyl Three Layer Floor Mat, Blue	16
2384VM Dual Conductor Metal Wrist Band	14	8281 Dissipative Vinyl Three Layer Floor Mat, Brown	16
2385 Dual Conductor Metal Wrist Band	14	8283 Dissipative Vinyl Three Layer Floor Mat, Gray	16
2385VM Dual Conductor Metal Wrist Band	14	8284 Dissipative Vinyl Three Layer Floor Mat, Blue	16
2386 Dual Conductor Metal Wrist Band	14	8291 Dissipative Vinyl Three Layer Floor Mat, Brown	16
2386VM Dual Conductor Metal Wrist Band	14	8293 Dissipative Vinyl Three Layer Floor Mat, Gray	16
2389 Monitor/Table Mat Interconnect Cord	13, 26	8294 Dissipative Vinyl Three Layer Floor Mat, Blue	16
3033 Snap Fastener	26	8343 Static Dissipative Hard Laminate, Beige	19
3034 Snap Fastener	26	8344 Static Dissipative Hard Laminate, Gray	19
3037 Insulated Bulldog Clip	26	8353 Static Dissipative Hard Laminate, Beige	19
3038 Uninsulated Alligator Clip	26	8354 Static Dissipative Hard Laminate, Gray	19
3040 Ground Cord	26	8360 Static Dissipative Hard Laminate, Beige	19
3041 Grounding Kit	26	8365 Static Dissipative Hard Laminate, Gray	19

8375 Static Dissipative Hard Laminate, White	19	8520 Single Card Carrier	42
8403 Conductive Adhesive	64	8521 Single Card Carrier	42
8405 Calcium Chloride	64	8522 Single Card Carrier	42
8411 Static Control Vinyl Tile, Brown	64	8523 Single Card Carrier	42
8412 Static Control Vinyl Tile, White	64	8810 Table Mat	17
8413 Static Control Vinyl Tile, Gray	64	8811 Table Mat	17
8414 Static Control Vinyl Tile, Blue	64	8830 Table Mat	17
8415 Static Control Vinyl Tile, Green	64	8831 Table Mat	17
8416 Static Control Vinyl Tile, Maroon	64	8840 Table Runner	17
8417 Static Control Vinyl Tile, Black	64	8841 Table Runner	17
8421 Static Control Vinyl Tile, Reverse Brown	64	8842 Table Runner	17
8423 Static Control Vinyl Tile, Reverse Gray	64	8860 Table Runner	17
8424 Static Control Vinyl Tile, Reverse Blue	64	8861 Table Runner	17
8425 Static Control Vinyl Tile, Reverse Green	64	8870 Floor Mat	17
8427 Static Control Vinyl Tile, Reverse Black	64	8871 Floor Mat	17
8431 Static Control Vinyl Tile, Brown	64	8880 Floor Runner	17
8432 Static Control Vinyl Tile, White	64	8881 Floor Runner	17
8433 Static Control Vinyl Tile, Gray	64	Novac TM Aerosol Cleaners	20, 21
8434 Static Control Vinyl Tile, Blue	64		
8435 Static Control Vinyl Tile, Green	64		
8436 Static Control Vinyl Tile, Maroon	64		
8437 Static Control Vinyl Tile, Black	64		
8441 Static Control Vinyl Tile, Reverse Brown	64		
8443 Static Control Vinyl Tile, Reverse Gray	64		
8444 Static Control Vinyl Tile, Reverse Blue	64		
8445 Static Control Vinyl Tile, Reverse Green	64		
8447 Static Control Vinyl Tile, Reverse Black	64		
8501 Static-Dissipative Portable Field Service Kit	22		
8502 Static-Dissipative Field Service Kit	22		
8505 Lightweight Portable Field Service Kit	23		
8507 Portable Field Service Kit	23		

3M, Dual Lock, Novac, Scotch, and Scotch-Brite are trademarks of 3M Company. UL is a registered trademark of Underwriters Laboratories Inc. Speidel is a registered trademark of Speidel Textron. Teflon is a trademark of E.I. du Pont de Nemours and Company. Windows is a registered trademark of Microsoft Corporation. All other trademarks are registered trademarks or trademarks of their respective companies.



Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Warranty; Limited Remedy; Limited Liability.

3M's product warranty is stated in its Product Literature available upon request. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.



3M Electronics
6801 River Place Blvd.
Austin, TX 78726-9000
www.3m.com/electronics



Recycled paper
40% pre-consumer
10% post consumer

Printed in USA.

© 3M 2005 98-0799-0773-3(1257.5)TG-1