


# STATSHIELD® M/I SERIES

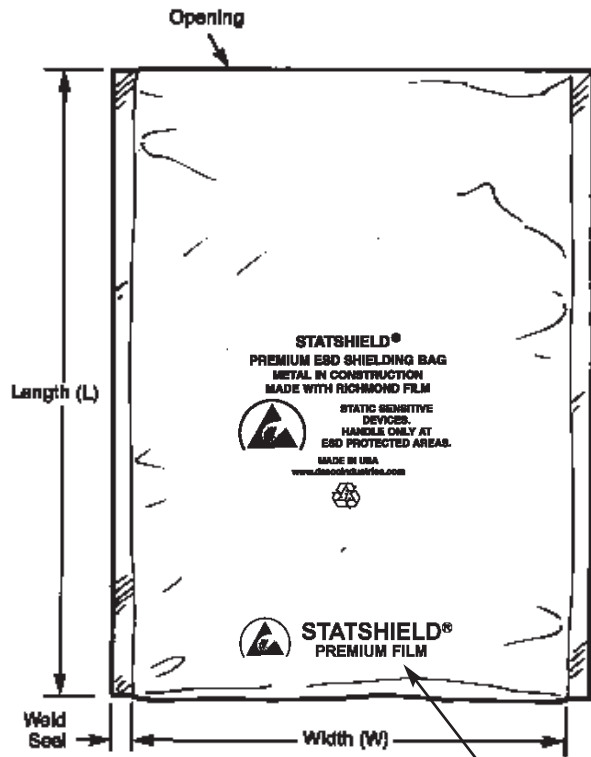

Side Weld Seals 3/8 in.

See reverse side for available sizes.

**The Statshield® watermark ensures you are getting top quality Desco proprietary shielding film manufactured by Richmond, reliably creating a Faraday Cage to protect ESD susceptible devices for storage and transportation outside an ESD protected area.**

**A fundamental ESD control principle (see ANSI/ESD S20.20 Foreword):**  
ESD susceptible items should be transported and stored outside an Electrostatic protected Area enclosed in low charging, static shielding protective packaging.

## Specifications:

### Electrical Properties

Surface Resistance:  
Outer Surface <math><10^{10}</math> ohms  
Aluminum Layer <math><10^2</math> ohms  
Inner Surface <math><10^{10}</math> ohms  
Static Shielding - Energy Penetration <math><15</math> nJ (nanojoules)  
Charge Generation Teflon: 0.09 nC/sq. in.  
Quartz: 0.01 nC/sq. in.  
Capacitance Probe (to dissipate 1 KV) <math><30V</math>

### Typical Values

### Physical Properties

Bag Thickness:  
Polyester Layer 0.5 Mils Static Dissipative PET film  
Aluminum Layer 10-25 Angstroms  
Polyethylene Layer 2.5 Mils Static Dissipative PE film  
Total Thickness 3.1 Mils  
Light Transmission (%) >40% (Tobias)  
Burst Strength (psi) >50  
Heat Seal (lbs/in) >10  
Seam Strength Pass  
Tear Strength (lbs) >25  
Tear Resistance 100 grams/mil  
Puncture Resistance (lbs) >12  
MVTR (gms / 100 in<sup>2</sup> / 24 hrs, 100°F) 0.35  
Abrasion Resistance >100 cycles  
Outgassing Pass  
Non-corrosive Pass

ASTM D-2103  
ASTM D-2103  
ASTM D-1003  
FTMS 101K, Method 2065.1  
375°F, 1/2 sec 60 psi  
MIL-PRF-81705D  
ASTM D-1004  
ASTM D-1422  
ASTM D-2065  
FTMS 101C/2065  
Sutherland Abr. (.0000 Steel Wool)  
ASTM E595  
MIL-STD-3010, M3005

### Test Procedures/Method

EOS/ESD S11.11  
EOS/ESD S11.11  
EOS/ESD S11.11  
EOS/ESD S11.31  
Modified Incline Plane  
Modified Incline Plane  
MIL-PRF-81705D, EIA 541

### Chemical Properties

Corrosion No effect on aluminum, copper, silver, Sn-Pb coated foil, stainless steel, low carbon steel  
Polycarbonate Capability, Yes  
No Amines or N-Octanoic Acid Not present




### Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades.


**Desco's bags are recyclable**

Static Dissipative  
Outer Polyester Layer  
Aluminum Shielding Layer  
**High Performance**  
Static Dissipative Inner  
Polyethylene Layer

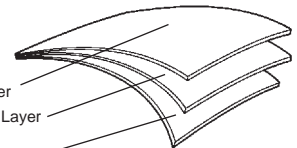

*The bag's material meets the performance specification requirements of Mil-PRF-81705D, Type III. Bag is free of amines, N-octanoic acid, and heavy metals.*

Statshield®, Statfree®, and Faraday® are Registered Trademarks of Desco Industries Inc.



Made in America

## STATSHIELD® PREMIUM BAG, SHIELDING, METAL IN CONSTRUCTION

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: www.desco.com  
PHONE (909) 627-8178 FAX (909) 627-7449

DESCO EAST: 90 HUDSON RD, CANTON, MA 02021-1407  
PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER  
12700

DATE:  
02/06

# DESCO

### PREMIUM METAL IN BAG SIZES

Item #	Size (WxL)	Item #	Size (WxL)	Item #	Size (WxL)	Item #	Size (WxL)
12700	3" x 5"	12711	6" x 30"	12722	10" x 14"	12734	14" x 16"
12701	4" x 4"	12712	8" x 8"	12723	10" x 16"	12735	14" x 18"
12702	4" x 6"	12713	8" x 10"	12724	10" x 18"	12736	15" x 18"
12703	4" x 24"	12714	8" x 12"	12726	10" x 24"	12737	16" x 18"
12704	4" x 30"	12715	8" x 14"	12727	10" x 30"	12738	16" x 20"
12705	5" x 8"	12716	8" x 16"	12728	11" x 15"	12739	16" x 24"
12706	6" x 8"	12717	8" x 18"	12729	12" x 14"	12740	16" x 30"
12707	6" x 10"	12718	8" x 24"	12730	12" x 16"	12741	18" x 18"
12708	6" x 16"	12719	8" x 30"	12731	12" x 18"	12742	18" x 20"
12709	6" x 18"	12720	9" x 16"	12732	12" x 24"	12743	18" x 24"
12710	6" x 24"	12721	10" x 12"	12733	12" x 30"	12744	24" x 24"

Packaged 100 per package

### Desco ESD Bags Are Generally Reusable

The user must determine the suitability of ESD bags for particular applications and after one year from purchase date.

All ESD Shielding Bags that are ripped, torn, or scratched should be discarded. The Bag's protection is lost if there is an electrical path from the charge on the outside of the Bag to the inside layer and ESDS parts within. Scratching may compromise the Faraday Cage shielding protection of shielding bags so they will not perform their function of protecting stored or transported ESD susceptible devices from electrostatic charges and discharges.

From ANSI/ESD S20.20 paragraph 6.2.4.2. Packaging Guidance: "The objective of ESD protective packaging is to prevent a direct electrostatic discharge to the ESDS item contained within and allow for dissipation of charge from the exterior surface. In addition, the

packaging should minimize charging of the ESDS item in response to an external electrostatic field and triboelectrification. They may also lose static shielding properties by crumpling, puncturing and folding."

Some end users reuse a Statshield® Transparent Metal In ESD Shielding Bag up to six times and then discard.

Ideally, the user should test, auditing some percentage of the re-used ESD Bags using test procedures outlined in ANSI EOS/ESD-DS11.11 - 1993 Surface Resistivity Standard, ESD-DS11.12 - 1996 Volume Resistance Measurements of Static Dissipative Planar Materials, and Shielding Materials EOS/ESD DS11.31 -1994.

The Organization shall define ESD protective packaging for all ESD susceptible item material movement within Protected Areas, between job sites and field service operations. See ANSI/ESD S20.20 paragraph 6.2.4.1. Packaging Requirements.

ESD susceptible items shall be packaged in ESD protective packaging while not in a Protected Area. See ANSI/ESD S20.20 paragraph 6.2.3.1.

Statshield® bags are packaged 100 per package in an oversized shielding bag rather than a cardboard box. Therefore, our bags are not exposed to water vapors that will degrade the metallized shielding layer. Our bags have an additional layer of barrier protection because of our packaging.

Ideally, ESD bags should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Ideally, ESD bags should not be stored in ultraviolet sunlight, moisture, or heat.

The user shall determine the suitability of the product for their intended use. Desco's only obligation shall be to replace such quantity of the product proved to be defective. See full Limited Warranty information at [www.desco.com/warranty.htm](http://www.desco.com/warranty.htm).

#### RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Desco Industries Inc. letter on-line at [Desco.com](http://Desco.com).