

TYPICAL INDICATOR ORDERING EXAMPLE

G01

P

C

DESCRIPTION FOR TYPICAL
ORDERING EXAMPLE

G01PC



PC TERMINALS	
P	Straight
V	Vertical

LED COLORS	
C	Red
E	Yellow
F	Green

Straight PC Terminals

LED COLORS & SPECIFICATIONS

		C	E	F
		Red	Yellow	Green
LED is colored in OFF state	Color			
Forward Peak Current	I_{FM}	30mA	30mA	30mA
Continuous Forward Current	I_F	20mA	20mA	20mA
Forward Voltage	V_F	2.0V	2.0V	2.1V
Reverse Peak Voltage	V_{RM}	5V	5V	5V
Current Reduction Rate Above 25°C	ΔI_F	0.40mA/°C	0.40mA/°C	0.40mA/°C
Ambient Temperature Range		-25°C ~ +85°C		

Electrical specifications are determined at a basic temperature of 25°C.


If the source voltage is greater than the LED's rated voltage, a ballast resistor must be connected in series with the LED.
That ballast resistor value can be calculated by using the formula shown in the Supplement section.

TYPICAL INDICATOR DIMENSIONS

Straight PC




G01PC

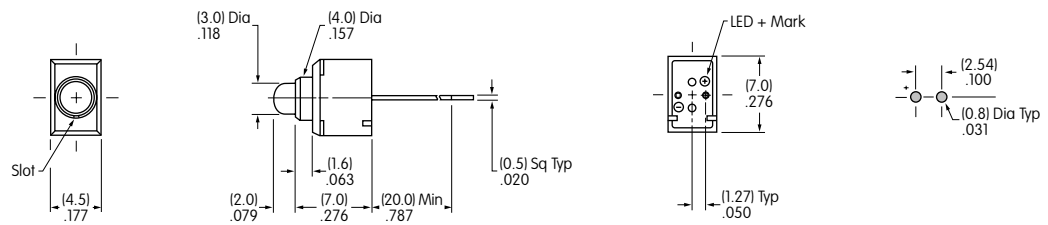

Vertical PC



G01VC

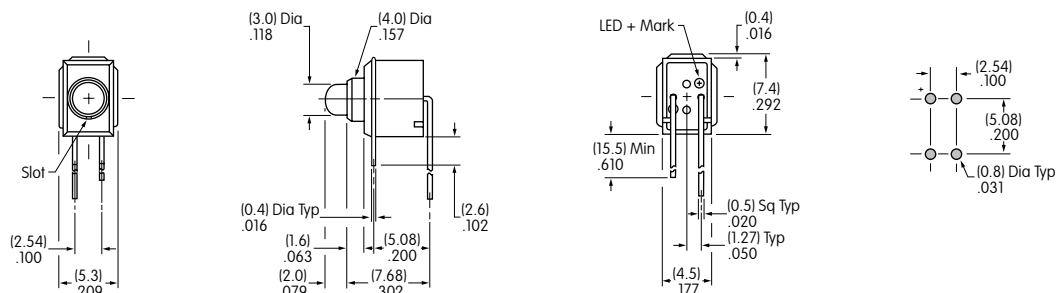

These indicators have anode and cathode terminals along with 2 support pins.