


SLIDE SWITCHES (1 mm PITCH)


RoHS compatible



FEATURES

- Lead-free soldering
- Lowest profile design of 1.45 mm
- Fine pitch of 1 mm
- Easy motion with knob height of 0.2 mm


INTERNAL STRUCTURE

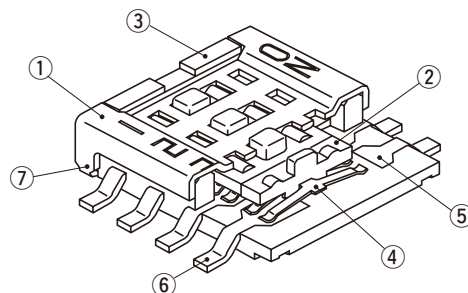

Part name		Material	Flammability
①	Cover	Stainless steel, Gold-plated	—
②	Slider	PA (Polyamide)	UL-94V-0
③	Housing	PPS (Polyphenylenesulphide)	
④	Slider contact	Stainless steel, Gold-plated	—
⑤	Fixed contact	Copper alloy, Gold-plated	
⑥	Terminal pin		
⑦	Earth terminal	Stainless steel, Gold-plated	

CFCs, Halon, Carbon tetrachloride and designated bromic flame retardant PBBs and PBBs are not used in our products.

PART NUMBER DESIGNATION

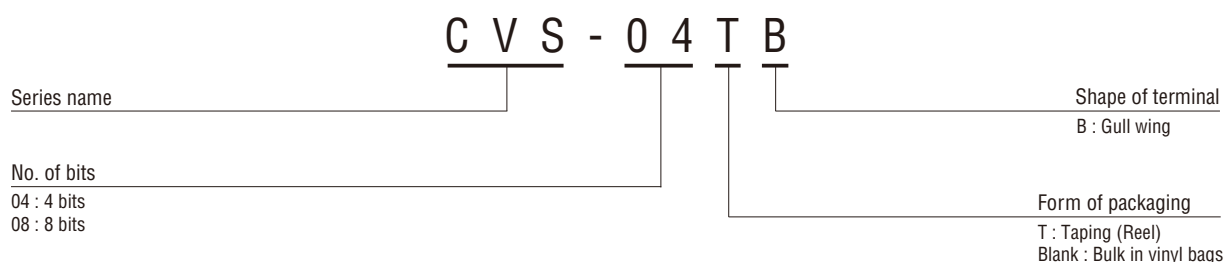

LIST OF PART NUMBERS

No. of bits	Form of packaging	Shape of terminals	B (Gull wing)	Pieces in package
4	Taping		CVS-04TB	2000 pcs./reel
	Vinyl pack		CVS-04B	100 pcs./pack
8	Taping		CVS-08TB	2000 pcs./reel
	Vinyl pack		CVS-08B	100 pcs./pack

SLIDE SWITCHES (1 mm PITCH)

■ STANDARD SPECIFICATIONS

Operating temp. range	- 40 ~ 85 °C
Storage temp. range	
Sealing	Non-washable
Net weight	Approx. 0.067g (CVS-04B) Approx. 0.13 g (CVS-08B)

■ ELECTRICAL CHARACTERISTICS

Contact rating Non-switching Switching Minimum	DC50 V 100 mA DC6 V, 100 mA DC24 V, 25 mA DC20 mV 1 μA
Contact resistance	200 mΩ maximum
Insulation resistance	100 MΩ (DC100 V) minimum
Dielectric strength	AC250 V, 60 s

■ MECHANICAL CHARACTERISTICS


Operating force	3 N {0.306 kgf} maximum
Stop strength	6 N {0.61 kgf}, 60 s
Solderability	245 ± 3 °C, 2 ~ 3 s
Soldering heat	Reflow : 255 °C (Peak temperature) Please refer to the profile below
	Manual soldering : 350 ± 10 °C, 3 ~ 4 s
Shear (Adhesion)	5 N {0.51 kgf} 10 s
Substrate bending	Width 90 mm, bend 3 mm, 5 s, 1 time
Pull-off strength	5 N {0.51 kgf} 10 s

{ } : Reference only

■ ENVIRONMENTAL CHARACTERISTICS

Vibration	Amplitude 1.5 mm (P-P) or Acceleration 98 m/s ² , 10-500 Hz, 3 directions for 10 cycles each
Shock	490 m/s ² , 11 ms 6 directions for 3 times each
Load life	Continuous load 1000 cycles, DC6 ± 0.5 V, 100 ± 10 mA
Humidity	-10 ~ 65 °C, Relative humidity 0 ~ 96 %, 24 h for 10 cycles
High temp. exposure	85 °C, 96 h
Low temp. exposure	-40 °C, 96 h
Thermal shock	-40 (0.5 h) ~ 85 °C (0.5 h), 5 cycles


Reflow profile for soldering heat evaluation

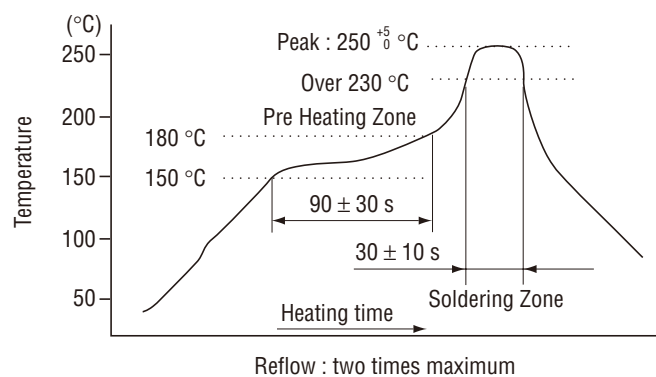

SLIDE SWITCHES (1 mm PITCH)


OUTLINE DIMENSIONS

● CVS-04B

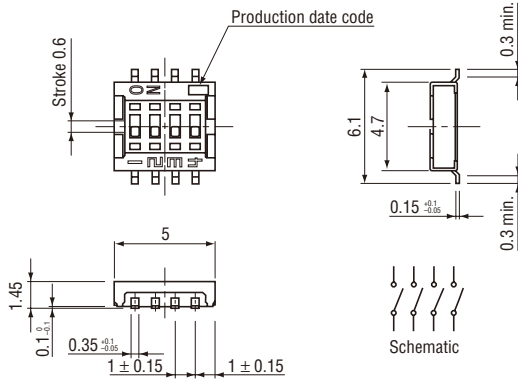

Unless otherwise specified, tolerance : ± 0.3 (Unit : mm)


● CVS-08B

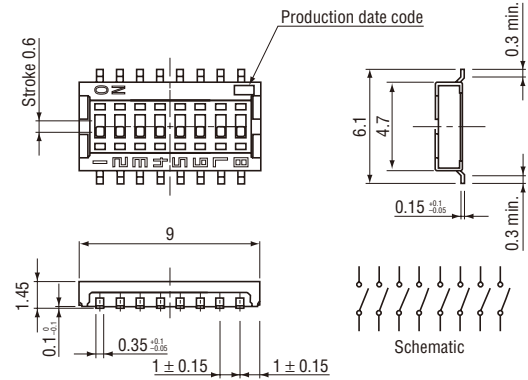


RECOMMENDED P.C.B. PAD OUTLINE DIMENSIONS

(Unit : mm)

● CVS-04B



● CVS-08B



SLIDE SWITCHES (1 mm PITCH)

PACKAGING SPECIFICATIONS


<Taping packaging specifications>

- Taping version is packaged in 2000 pcs. per reel. Orders will be accepted for units of 2000 pcs., i.e., 2000, 4000, 6000 pcs., etc.
- Taping version is boxed with two reels.

Maximum number of consecutive missing pieces = 2

Leader length and reel dimension are shown in the diagrams below:

● Embossed tape dimensions

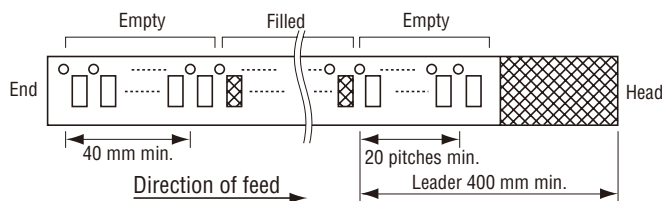


● Reel dimensions


(Conforms to JIS C 0806-3)

(In accordance with EIAJ ET-7200A)


(Unit: mm)

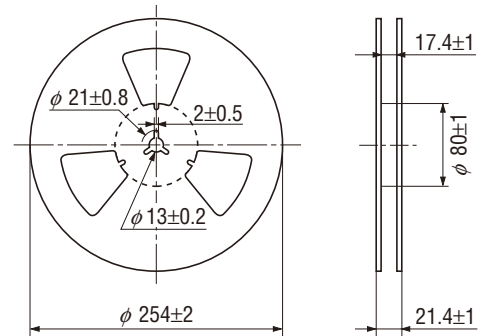

● CVS-04B

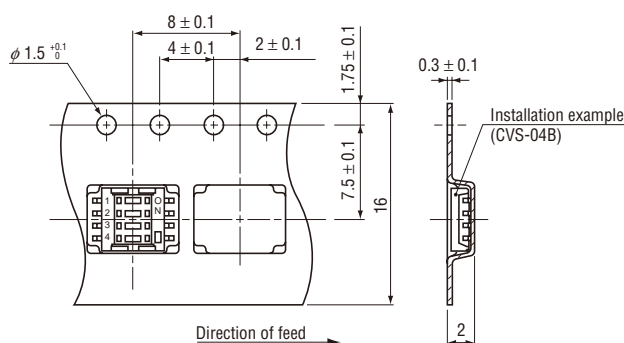

● CVS-08B

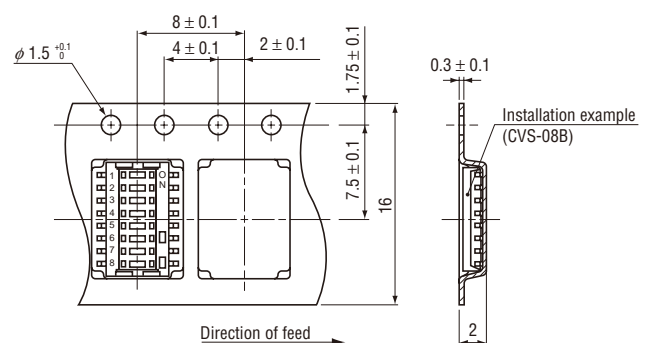

<Vinyl pack packaging specifications>

- The smallest unit of bulk in vinyl bag is 10 pcs. per pack. Orders will be accepted for unit of minimum 10 pcs., i.e., 10, 20, 30 pcs., etc.
- Boxing of bulk in vinyl bags is performed with 100 pcs. (standard 500 pcs.) per box.