


ROTARY CODED SWITCHES

S-8000


RoHS compatible

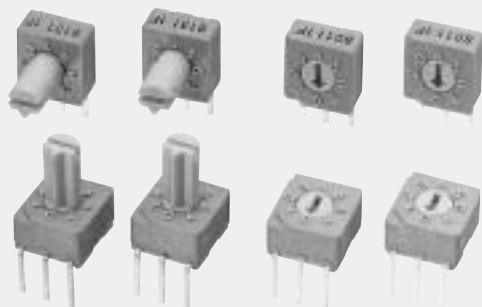

FEATURES

- Lead-free soldering
- 3 bits 8 positions type
- Protection against dust and washable after soldering
- DIP-pin configuration : 2.54 mm pitch

INTERNAL STRUCTURE

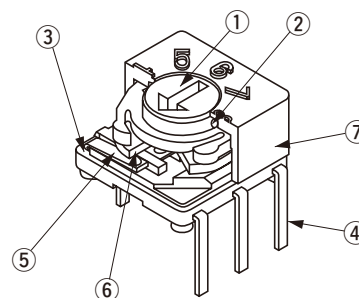

Part name	Material	Flammability
① Rotor	POM (polyoxymethylene)	UL-94HB
② "O" ring	Silicone rubber	
③ Base	PBT (Polybutyleneterephthalate)	
④ Terminal pin	Copper alloy, Gold-plated	—
⑤ Contact		
⑥ P.C.B.	Gold-plated epoxy board	
⑦ Housing	PBT (Polybutyleneterephthalate)	UL-94HB

CFCs, Halon, Carbon tetrachloride and designated bromic flame retardant PBBs and PBBs are not used in our products.

PART NUMBER DESIGNATION

Series name	S	-	8	0	1	0	W	Form of packaging
Shape of rotor								W : Tray packaging Blank : Bulk in vinyl bag
0 : Without knob 1 : With knob (extended shaft)								Setting position
Code format								0 : Top setting 1 : Side setting
1 : Real code 3 : Complementary code								

LIST OF PART NUMBERS

Shape		Form of packaging	Binary coded octal		Pieces in package
			Real code	Complementary code	
Top setting	Without knob	Tray packaging	S-8010W	S-8030W	50 pcs./tray
		Vinyl pack	S-8010	S-8030	50 pcs./pack
	With knob	Tray packaging	S-8110W	S-8130W	50 pcs./tray
		Vinyl pack	S-8110	S-8130	50 pcs./pack
Side setting	Without knob	Tray packaging	S-8011W	S-8031W	50 pcs./tray
		Vinyl pack	S-8011	S-8031	50 pcs./pack
	With knob	Tray packaging	S-8111W	S-8131W	50 pcs./tray
		Vinyl pack	S-8111	S-8131	50 pcs./pack

※ : Verify the above part numbers when placing orders.
Tray version can be supplied only in tray units.

S-8000

ROTARY CODED SWITCHES

STANDARD SPECIFICATIONS

Circuit type	BCO (Real code, complementary code)
Operating temperature range	-25 ~ 70 °C
Storage temperature range	
Sealing	Washable by "O" ring
Net weight	Approx. 0.27 g (S-8010, S-8030) Approx. 0.34 g (S-8110, S-8130) Approx. 0.33 g (S-8011, S-8031) Approx. 0.40 g (S-8131, S-8111)

ELECTRICAL CHARACTERISTICS

Contact rating Non-switching Switching Minimum	DC50 V 100 mA DC5 V 100 mA DC20 mV 1 μ A
Contact resistance	100 m Ω maximum
Insulation resistance	1000 M Ω (DC100 V) minimum
Dielectric strength	AC250 V, 60 s

MECHANICAL CHARACTERISTICS

No. of positions	8
Adjustment torque	36 mN·m {367 gf·cm} maximum
Stepping angle	45°
Terminal strength	10 N {1.02 kgf} minimum
Solderability	245 \pm 3 °C, 2 ~ 3 s
Soldering heat	Flow : 260 \pm 3 °C as the temperature in a pot of molten solder, immersion from head of terminal to backside of board, 5 ~ 6 s, two times maximum
	Manual soldering : 380 \pm 10 °C, 3 ~ 4 s

{ } : Reference only

ENVIRONMENTAL CHARACTERISTICS

Vibration	Amplitude 1.5 mm or Acceleration 98 m/s ² , 10-500-10 Hz, 3 directions for 2 h each
Shock	490 m/s ² , 11 ms 6 directions for 3 times each
Load life	10000 steps minimum DC5 V, 100 mA
Humidity (Steady state)	40 °C, Relative humidity 90 ~ 95 %, 240 h
High temperature exposure	70 °C, 96 h
Low temperature exposure	-25 °C, 96 h
Thermal shock	-25 (0.5 h) ~ 70 °C (0.5 h), 5 cycles

CODE FORMAT

No. of positions			0	1	2	3	4	5	6	7
Code	Real code	4					●	●	●	●
		2			●	●			●	●
		1		●		●		●		●
	Complementary code	$\overline{4}$	●	●	●	●				
		$\overline{2}$	●	●			●	●		
		$\overline{1}$	●		●		●		●	


● ... Contact closed

S-8000 ROTARY CODED SWITCHES


OUTLINE DIMENSIONS

Unless otherwise specified, tolerance: ± 0.3 (Unit: mm)


- S-8010 (Real code)
- S-8030 (Complementary code)

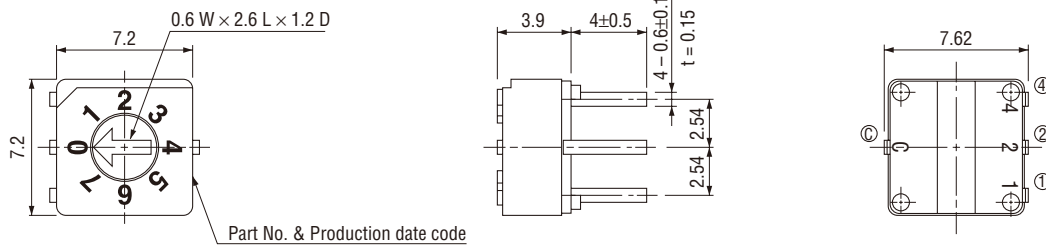


- S-8011 (Real code)
- S-8031 (Complementary code)

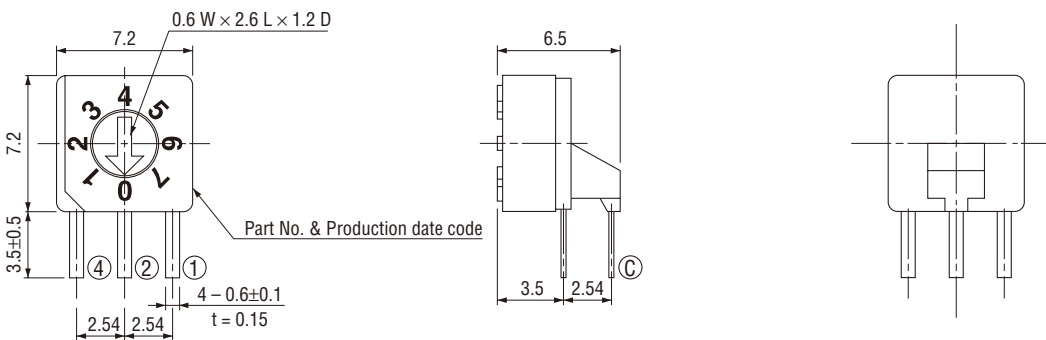

- S-8110 (Real code)
- S-8130 (Complementary code)

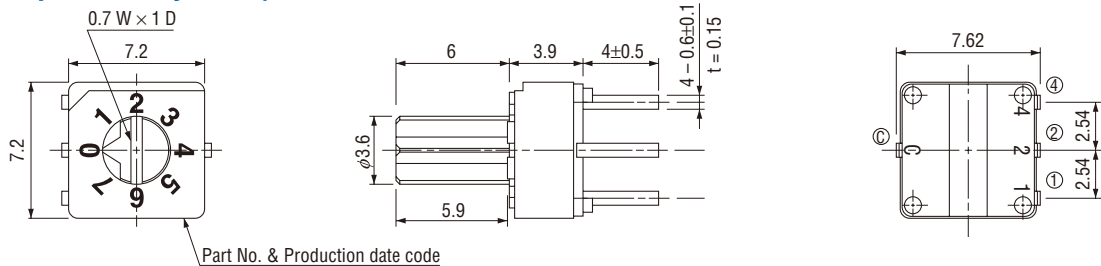

- S-8111 (Real code)
- S-8131 (Complementary code)

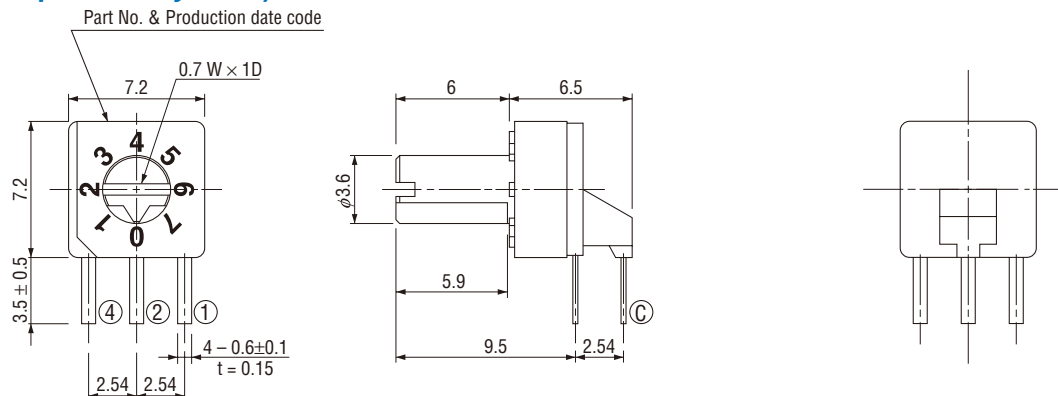

S-8000

ROTARY CODED SWITCHES

■ TERMINAL CONNECTION / P.C.B. THROUGH HOLE DIMENSIONS

(Unit: mm)

	Top setting	Side setting
Terminal pin layout (Bottom view)	<p>Real code Complementary code</p>	<p>Operating face of real code Operating face of complementary code</p>
P.C.B. dimensions (Bottom view)		

■ PACKAGING SPECIFICATIONS

<Tray packaging specifications>

- Tray version is packaged in 50 pcs. per tray. Orders will be accepted for units of 50 pcs., i. e., 50, 100, 150 pcs. etc.
- Tray version is boxed with 10 trays.

<Vinyl pack specifications>

- The smallest unit of bulk in vinyl bag packaging is 10 pcs. per pack.
Orders will be accepted for unit of minimum 10 pcs., i.e., 10, 20, 30 pcs., etc.
- Boxing of bulk in vinyl bags is performed with 50 pcs. (standard 100 pcs.) per box.