


RECOMMENDED PANEL LAYOUT

POS.	CONNECTED TERMINAL #	SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5
6-7	7-8	B-1	NONE	1-3

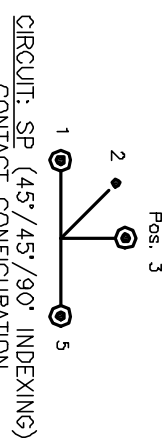

LEGEND
 • =Detent Positions (45° or 90°)
 ⊙ =Key pull possible in these positions

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1KV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
7. MATERIALS:

CONTACTS: Silver Plated Cu (Q Contact material)
 TERMINALS: GOLD Plated Cu (Q Contact material)
 MOUNTING NUT: Nickel Plated zinc alloy
 CONTACT SPRING: Piano Wire
 KEYS (2): Brass with code no. A126
 LOCK: Bright Ni plated zinc alloy with Ni facing
 TUMBLER Mechanism: 4-disc tumbler cylinder.

A	13055	RELEASED FOR PRODUCTION	4/17/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
K0130V-A126				
SCALE	DATE	DR	DWG	REV
1:1	4/17/03	AR	K200231	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

