

MATERIAL SPECIFICATIONS:

ContactsSilver clad copper with gold flash
 Case MaterialThermoset
 Actuator MaterialNickel plated copper alloy
 TerminalsCopper with gold flash
 Terminal SealMolded in


TYPICAL PERFORMANCE CHARACTERISTICS:

Contact Rating6 A @ 125 VAC, 3 A @ 250 VAC
 Initial Contact Resistance.....10 Milliohms max.
 Contact TimingBreak-before-make
 Insulation Resistance1,000 Megohms min.
 Dielectric Strength1,500 Volts RMS @ sea level
 Actuation Force1.3 to 2.7 lbs.
 Actuator Travel140" (3.56)
 Life Expectancy50,000 Actuations

ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature.....-4°F to +176°F (-20°C to +80°C)
 Storage Temperature.....-40°F to +176°F (-40°C to +80°C)

Notice: O-ring on shoulder and inside moveable shaft provides splashproof seal.

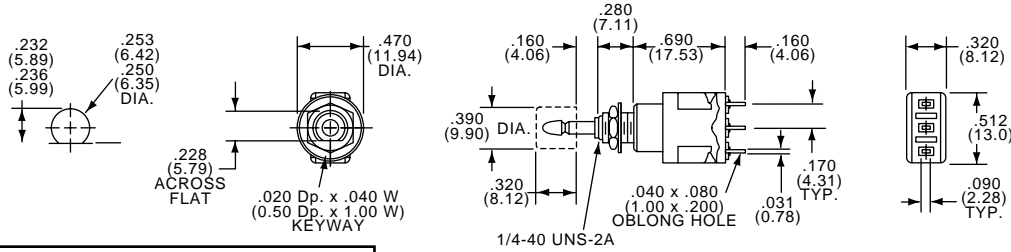


Model	Type	Act. Code P. M9	Action
MPE106D	SPDT	23	Push on/Push off
MPE106F	SPDT	19	Momentary

Cap not supplied, order separately (See Cap Model C22 and C23 on page D45.)

SPDT



MPE106D

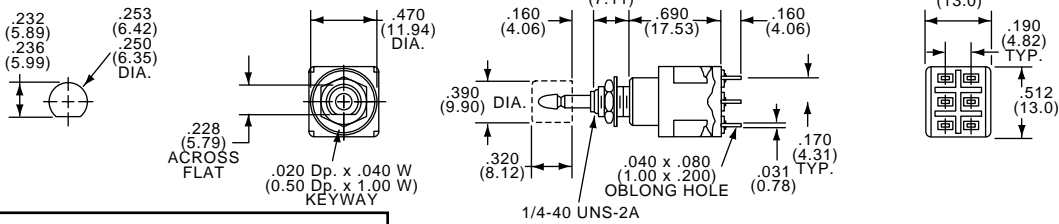


Model	Type	Act. Code P. M9	Action
MPE206N	DPDT	24	Push on/Push off
MPE206R	DPDT	20	Momentary

Cap not supplied, order separately (See Cap Model C22 and C23 on page D45.)

DPDT



MPE206N

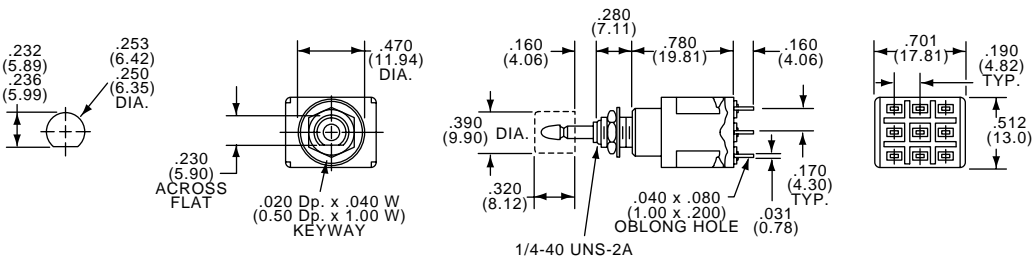


Model	Type	Act. Code P. M9	Action
MPE306D	3PDT	25	Push on/Push off
MPE306F	3PDT	21	Momentary

Cap not supplied, order separately (See Cap Model C22 and C23 on page D45.)

3PDT



MPE306F

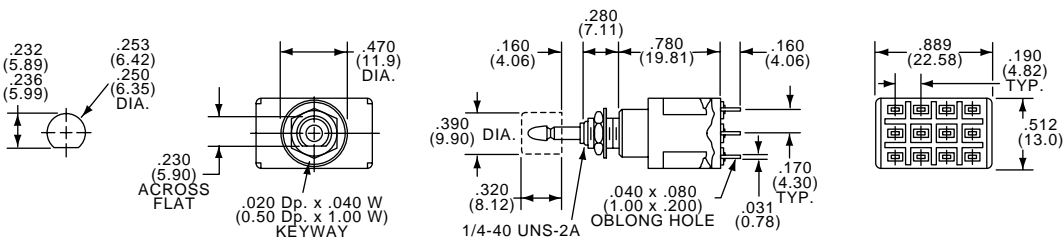

Model	Type	Act. Code P. M9	Action
MPE406N	4PDT	26	Push on/Push off
MPE406R	4PDT	22	Momentary

Cap not supplied, order separately (See Cap Model C22 and C23 on page D45.)

4PDT



MPE406N

Need more technical information?

Consult your Thomas & Betts sales office listed on the back cover

Thomas & Betts
 8155 T&B Blvd.
 Memphis, TN 38125
 (901) 252-5000 FAX (901) 252-1380