



RECOMMENDED P.C.B. LAYOUT



SWITCH FUNCTION	<DN>
DN	1-3
	1-2

< > =MENTARY

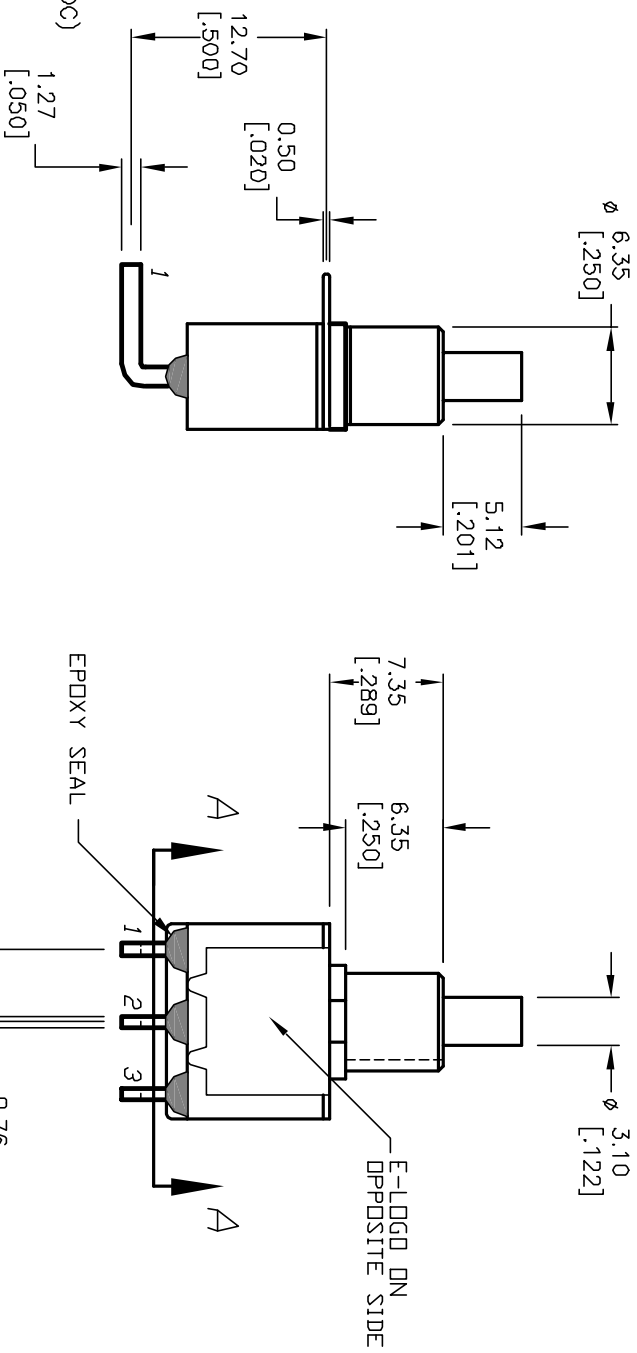

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.4(VA) @20V max. (AC or DC)
 5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Gold plate over Nickel plate.
 6. CONTACT RESISTANCE: 10mΩ-ohms initial @2-4VDC
 7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
 8. INSULATION RESISTANCE: 1,000M ohm min.
 9. DIELECTRIC STRENGTH: 1000V RMS @sea level
 10. OPERATING TEMP.: -30°C to +85°C

REV.	ECN No.	REVISION AND REDRAWN	DATE	CHKD	SCALE	DATE	DR	DWG	REV
C	12339	REVISED AND REDRAWN	8/1/02	CJB	2:1	8/1/02	CJB	T711003	C
DESCRIPTION					TITLE				
700 SP-7 B20 M6 R E (GOLD CONTACTS)					E-SWITCH®				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									