


RECOMMENDED P.C.B. LAYOUT




SWITCH FUNCTION	
DN	<DN>
1-3	1-2

NOTES:

() = MOMENTARY

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC or DC max.
- ▲ 5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY w/GOLD plate over Nickel plate.
6. CONTACT RESISTANCE: 10mILLI-ohms initial @2-4VDC
7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to +85°C
11. ▲ DENOTES CRITICAL PARAMETER.

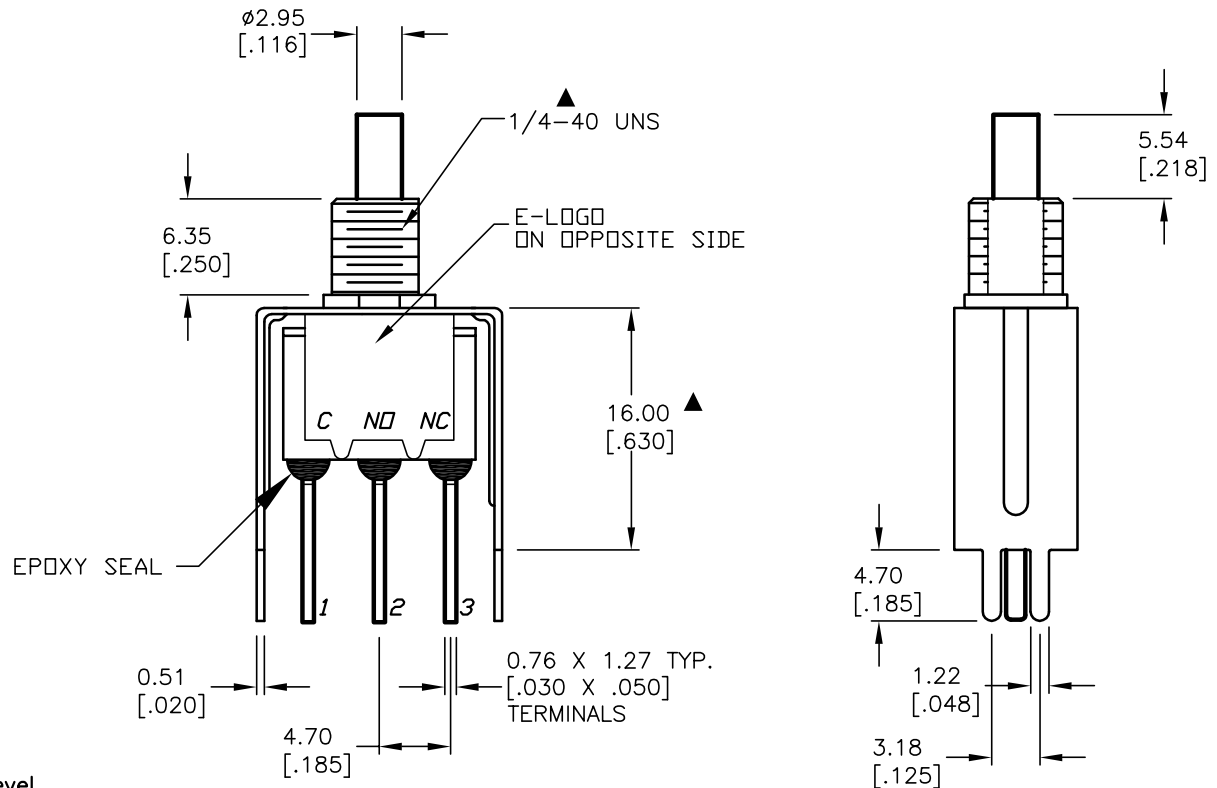

E-SWITCH®

TITLE					700SP7B21VS3RE				
SCALE	DATE	DR	DWG	REV					
2:1	9/15/03	AR	T711046	A					

B	13447	RELEASED FOR PRODUCTION	9/15/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED