


RECOMMENDED PANEL LAYOUT  
SCALE 1:1




CIRCUIT: SPDT

SWITCH FUNCTION	
ON	<ON>
1-3	1-2

( ) = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 1A @120VAC OR DC
- ▲ 5. FIXED TERM. & MOVING CONTACT:  
COPPER ALLOY W/SILVER PLATE
6. ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK  
CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000M OHM MIN.
8. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to 85°C

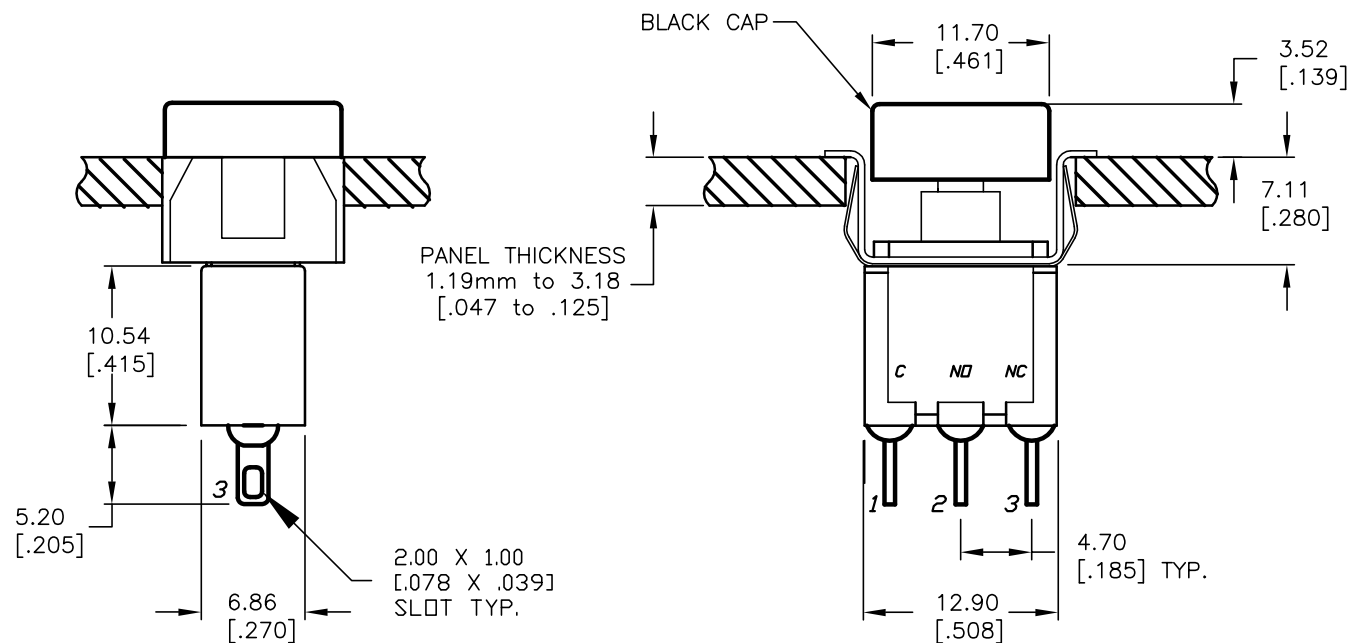

**E-SWITCH®**

TITLE

700SP7M1QEAP1BLK

SCALE

2:1

DATE

8/10/04

DR

AR

DWG

T711901

REV

A

A	14221	RELEASED FOR PRODUCTION	8/10/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED