

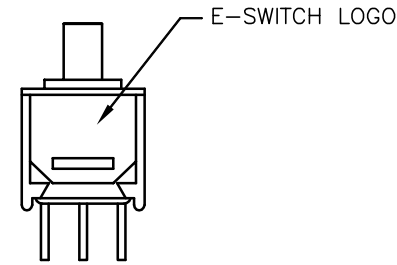


RECOMMENDED PCB LAYOUT

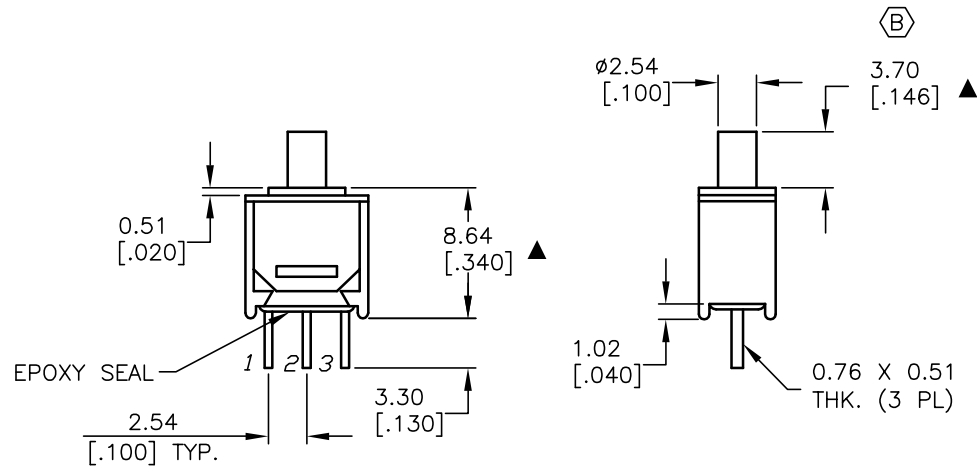

CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION	
ON	<ON>
2-1	2-3

< > = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA max. @20VAC or DC.
5. FIXED TERM. & MOVING CONTACT:
▲ Copper Alloy w/Gold plate over NICKEL plate.
6. CONTACT RESISTANCE: 20mILLI-ohms initial @2-4VDC.
7. ELECTRICAL LIFE: 60,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

B	13412	CORRECT ACTUATOR LENGTH	8/29/03	AR
A	13191	RELEASED FOR PRODUCTION	6/6/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
800SP8B10M2RE				
SCALE	DATE	DR	DWG	REV
2:1	6/6/03	AR	T822033	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED