



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120V or 28VDC;
1A @250VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/SILVER plate.
6. CONTACT RESISTANCE:
10mILLI-Ohms initial @2-4VDC.
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C



SWITCH FUNCTION	
DN	(DN)
2-1	2-3

() = MOMENTARY

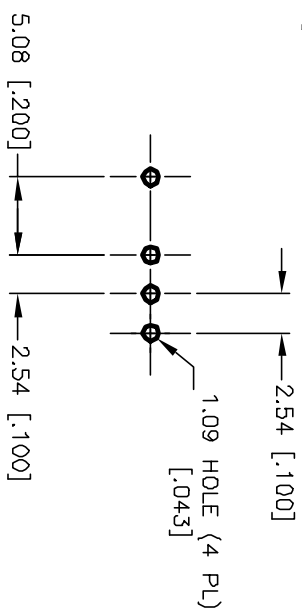

RECOMMENDED P.C.B. LAYOUT

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
A	11607	RELEASED FOR PRODUCTION	6/18/02	CJB	2:1	6/18/02	CJB	XT0098P	A
<p>E-SWITCH®</p> <p>800 SP-8 B7 M7 Q E /C1 BLK</p>									
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p>									