


CONTACT CONFIGURATION



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X:XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @120VAC or 28VDC max.  
1A @250VAC
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/Ag plating
6. ELECTRICAL LIFE: 60,000 make-and-break cycle  
at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.

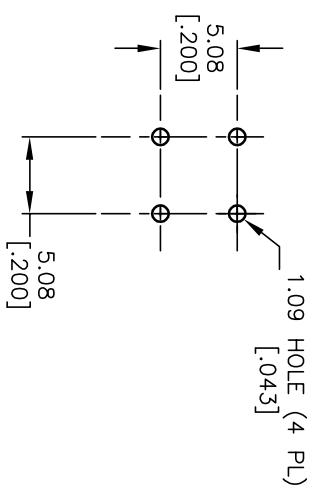

RECOMMENDED P.C.B. LAYOUT

A	13337	RELEASED FOR PRODUCTION	7/31/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE	DR	DWG	REV
800SP9B7M6QE2BLK		2:1		7/31/03	AR	XT0067P	A



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED