
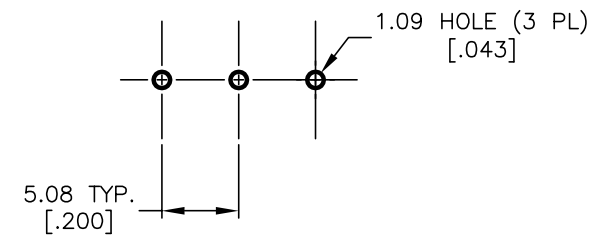


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 VA max. @20 VAC or DC max.
- ▲ 5. FIXED TERMINAL & MOVING CONTACT:  
COPPER ALLOY W/GOLD PLATE OVER  
NICKLE PLATE.
6. ELECTRICAL LIFE: 60,000 make-and-break cycle  
at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.



B	14165	CHANGE PART NUMBER	7/14/04	AR
A	14050	RELEASED FOR PRODUCTION	6/2/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

<b>E-SWITCH®</b>				
TITLE 800SP9B7M7REC1BLK				
SCALE 2:1	DATE 6/2/04	DR AR	DWG XT0126P	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED