


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @120VAC;
1A @250VAC
5. FIXED TERMINAL & MOVING CONTACT:
Copper alloy w/Silver plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycle
at full load.
7. CONTACT RESISTANCE: 10milli-Ohms max., Typical @2-4VDC
8. INSULATION RESISTANCE: 1,000Mega-Ohms
9. DIELECTRIC STRENGTH: 1,000 V RMS @sed level.
10. OPERATING TEMP.: -30°C to 85°C

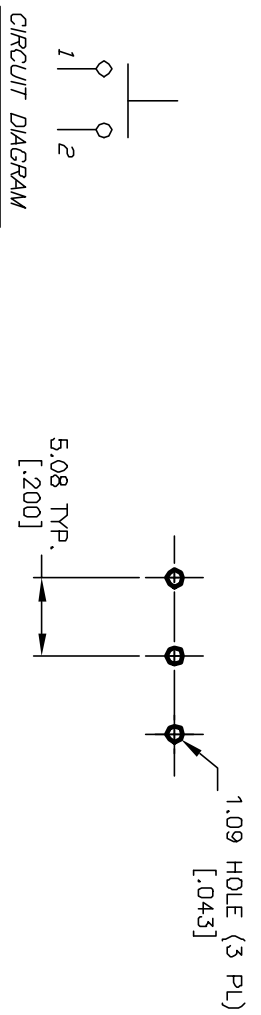

E-SWITCH®

TITLE	800 SP-9 B8 M7 QE		
SCALE	2:1	DATE	11/5/02
DR	CJB	DWG	T811048

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12539	RELEASED FOR PRODUCTION	11/5/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED