


RECOMMEND P.C.B. LAYOUT

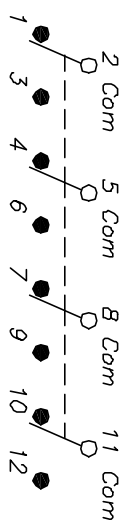

CIRCUIT: 4PDT
CONTACT CONFIGURATION

CONNECTED TERM. #	FUNCTION	POS.
2-1,5-4,8-7,11-10	NORMALLY CLOSED	POS. 1
2-3,5-6,8-9,11-12	NORMALLY OPEN	POS. 2
2,5,8,11	COMMON	

E-SWITCH®

TL4201 EE Y A

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 0.1A @30VDC
4. TRAVEL TO MAKE: 1.34±0.38
TOTAL TRAVEL: 2.50±0.38
TRAVEL TO LATCH POSITION: 150±0.38
5. ACTUATION FORCE: 250 +100/-50gf
6. ELECTRICAL LIFE: 10,000 Cycles Make & Break
CYCLES at Full Load.
7. DESIGNATE MAJOR DIMENSIONS

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
E	11231	CHANGE PART DESCRIPTION	2-8-01	CJB	2:1	2/08/01	CJB	P010552	E
TITLE THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED									