




RECOMMENDED PANEL MOUNT  
SCALE 1:1  
7mm MAX. THICKNESS



CIRCUIT: SPST

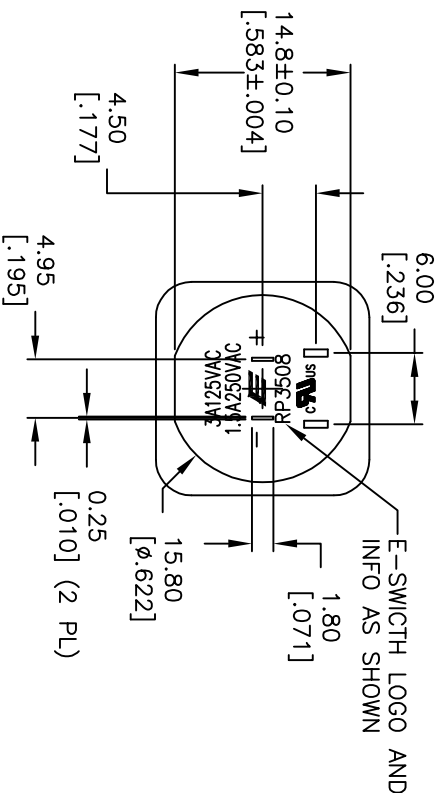

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X:X=±0.4  
X:XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 3A 125V, 1.5A 250V AC, UL & CUL APPROVED
  5. CONTACT RESISTANCE: 50m ohm max.
  6. INSULATION RESISTANCE: DC 500V 100Mega Ohm min.
  7. DIELECTRIC STRENGTHS: AC 1500V 1 minute
  8. LED: RED 3VDC
  9. ▲ DENOTES CRITICAL PARAMETER.
  10. 2002/95/EC (ROHS) COMPLIANT



RP3508BBLKREDRE DNS

C	17687	CHANGED ACTUATOR LENGTH	9/18/07	BF
B	14157	UPDATE DIMS, TITLE, ADD LOGO	7/9/04	AR
A	13213	RELEASED FOR PRODUCTION	6/13/03	AR
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

SCALE	DATE	DR	DWG	REV
1.5:1	9/18/07	BF	F130412	C