





Parts List				
ITEM	QTY	PART NUMBER	DESCRIPTION	
1	1	F060619	LAKEEV11	
2	1	F051601	P16 PLASTIC TERM. PROTECTOR	
3	1	F050420	12VDC RED LED	
4	1	F051702	25MM RING	
5	1	F060204	25MM RED LENS	

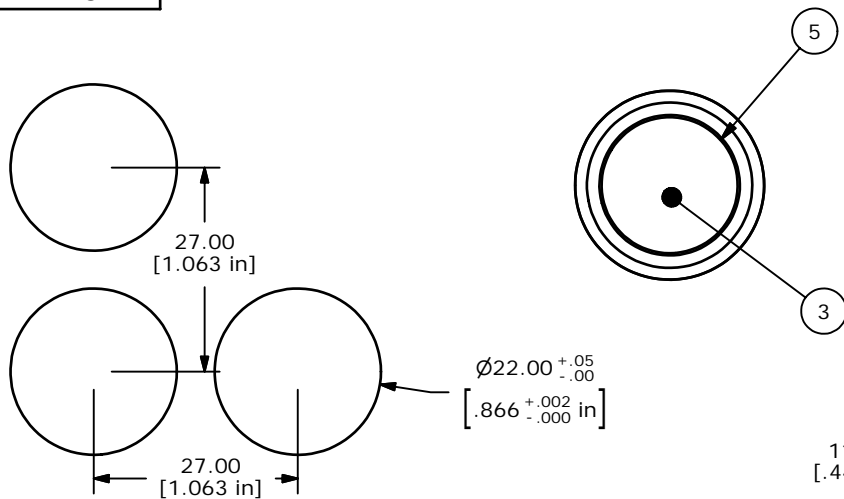


RECOMMEND PANEL MOUNTING



SPST  
CONTACT CONFIGURATION

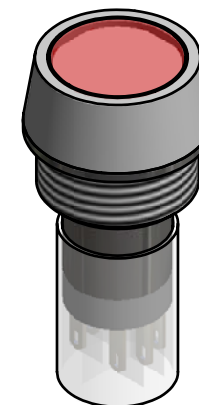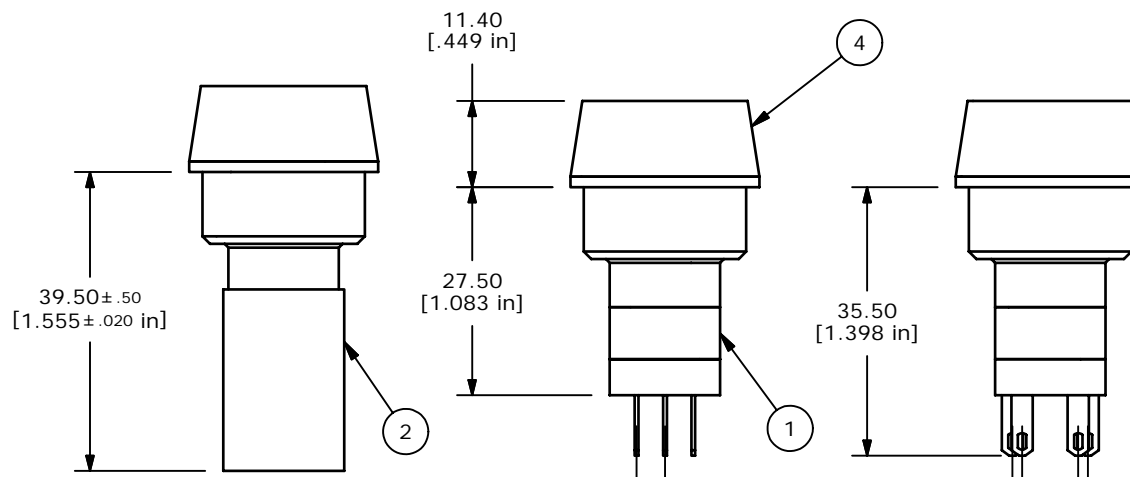

ISOMETRIC



- NOTES:
1. ALL DIMENSIONS IN MM [INCH].
  2. GENERAL TOLERANCE: 0.0±0.4  
0.00±0.25
  3. TERM. NOS. FOR REF. ONLY.
  4. RATING: 5A @250VAC  
8A @125VAC  
.2A @250VDC  
6A @24VDC
  5. ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
  6. INSULATION: 1,000 MΩ MIN.
  7. DIELECTRIC STRENGTH: 2000V FOR 1 MIN
  8. OPERATING TEMP: -25°C TO 55°C
  9. LENS COLOR: RED
  10. LAMP VOLTAGE: 12VDC LED

**E-SWITCH®**

TITLE LAKEEV11JREDRED

A	15695	RELEASED FOR PRODUCTION	1/19/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

SCALE	DATE	DR	DWG	REV
1:1	1/19/2006	PH	XF0666P	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED