


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 7A@125V, 4A@250 VULCUL, & VDE APPROVED
 5. CONTACT MATERIAL: Terminals, Copper Alloy w/Silver plate. Contacts, Copper Alloy w/Tin Oxide
 6. CONTACT RESISTANCE: 100milli-ohms TYP. MAX Initial
 7. DIELECTRIC STRENGTH: 1500V for 1min 3000V between poles
 8. ELECTRICAL LIFE: 6,000 Cycles
 9. OPERATING FORCE: 550±150gf TYP.
 10. TRAVEL: FULL:5.5, LOCK:4.0

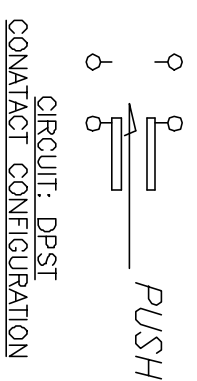

E-SWITCH®

B		RELEASED FOR PRODUCTION		7/15/02		CJC		TITLE		P227 EE 1A 18B	
A		DESCRIPTION		DATE		CHKD		SCALE		DATE	
REV.		ECN No.		DATE		CHKD		SCALE		DATE	
B		RELEASED FOR PRODUCTION		7/15/02		CJC		TITLE		P227 EE 1A 18B	
A		DESCRIPTION		DATE		CHKD		SCALE		DATE	
REV.		ECN No.		DATE		CHKD		SCALE		DATE	
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p>											
DR		CB		DWG		P030121		REV		A	