SHEET 1 OF 1



CIRCUIT DIAGRAM

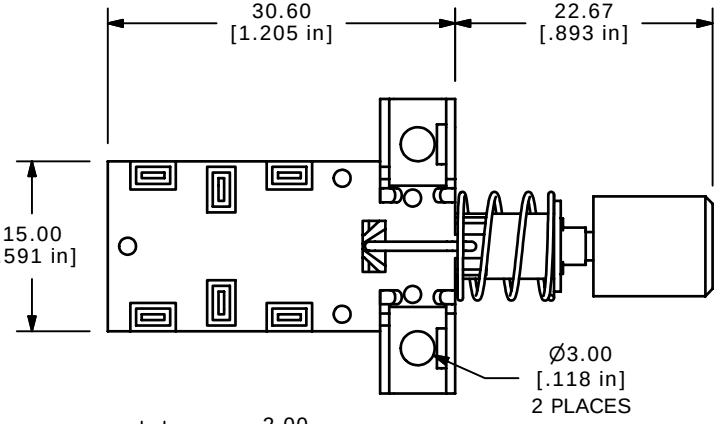

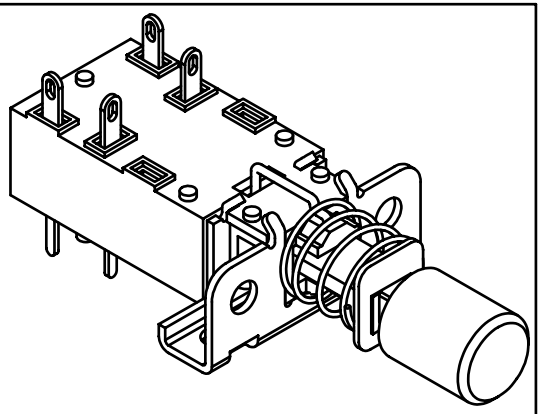

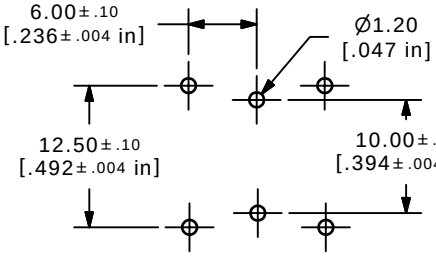

MOUNTING HOLE LAYOUT

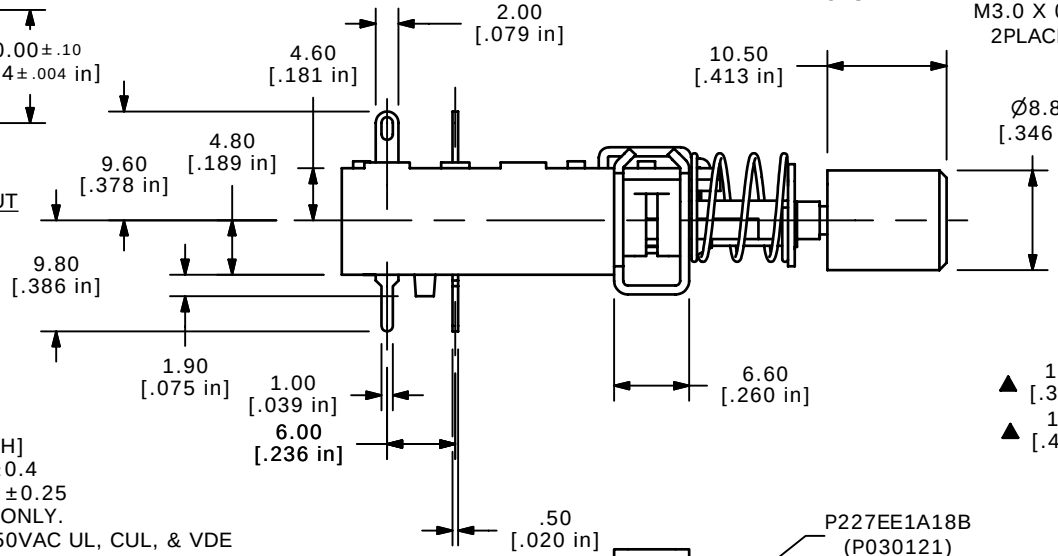

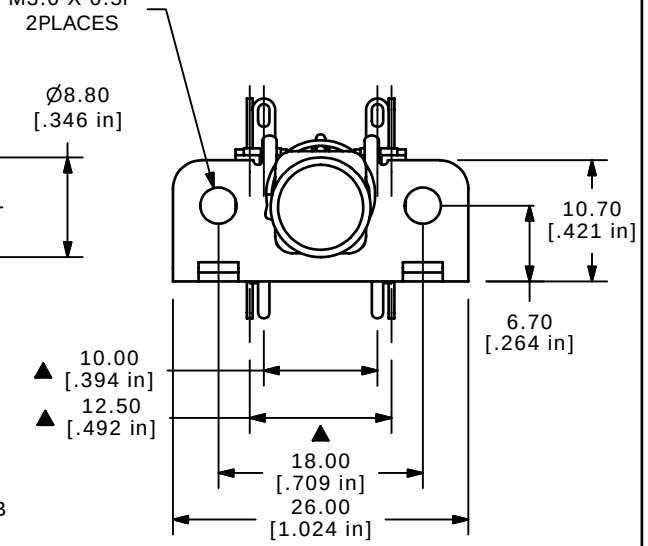

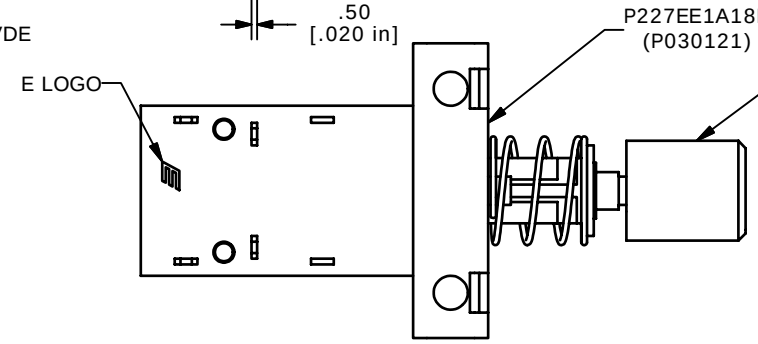

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 7A@125VAC, 4A@250VAC UL, CUL, & VDE APPROVED
▲ 5. CONTACT MATERIAL:
   TERMINALS, COPPER ALLOY SILVER PLATE.
   CONTACTS, COPPER ALLOY W/TIN OXIDE
6. CONTACT RESISTANCE: 100MILLI-OHMS MAX.
7. DIELECTRIC STRENGTH: 1000VAC for 1min
8. ELECTRICAL LIFE: 6,000 CYCLES
9. OPERATING FORCE: 550±150gf TYP.
10. TRAVEL: FULL:5.5±0.2mm, LOCK: 4.0±0.2mm
11. ▲DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	16183	RELEASED FOR PRODUCTION	7/11/06	BK

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE P227EE1A18BTAGBLK

SCALE	DATE	DR	DWG	REV
1.5	07/11/06	BK	XP0291A	A