


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X:XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 7A@125V, 4A@250 VULCUL, & VDE APPROVED
 5. CONTACT MATERIAL: Terminals, Copper Alloy W/Silver plate, Contacts, Copper Alloy W/Tin Oxide
 6. CONTACT RESISTANCE: 100mΩ—ohms TYP. MAX Initial
 7. DIELECTRIC STRENGTH: 1500V for 1min 3000V between poles
 8. ELECTRICAL LIFE: 6,000 Cycles
 9. OPERATING FORCE: 550±150gf TYP.
 10. TRAVEL: FULL:5.5, LOCK:4.0
 11. ▲ DENOTES CRITICAL PARAMETER.

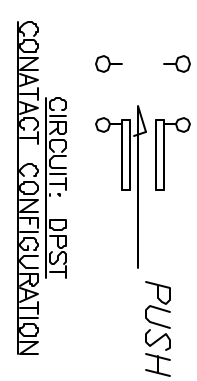

E-SWITCH®

A		13307	RELEASED FOR PRODUCTION	7/21/03	AR	TITLE	
REV.	ECN No.		DESCRIPTION	DATE	CHKD	P227EE1A20A	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						SCALE	1.5:1
						DATE	7/21/03
						DR	AR
						DWG	P030127
						REV	A