


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 7A@125V, 4A@250 VUL,CUL, & VDE APPROVED
 5. CONTACT MATERIAL: Terminals, Copper Alloy w/Silver plate. Contacts, Copper Alloy w/Tin Oxide
 6. CONTACT RESISTANCE: 100milli-ohms TYP. MAX Initial
 7. DIELECTRIC STRENGTH: 1500V for 1min 3000V between poles
 8. ELECTRICAL LIFE: 6,000 Cycles
 9. OPERATING FORCE: 550±150gf TYP.
 10. TRAVEL: FULL:5.5, LOCK:4.0

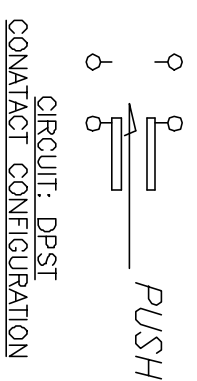

E-SWITCH®

B	12306	REVISED NOTES, REMOVED P.C.B.	7/15/02	CB	TITLE	SCALE	DATE	DR	DWG	REV
A	10821	RELEASED FOR PRODUCTION	10/19/01	CJC	P227 EE 14 20B	1.5:1	10/19/01	CJC	P030119	B
REV.	ECN No.	DESCRIPTION	DATE	CHKD						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED										