



RECOMMENDED PANEL MOUNT


SCALE 1:1  
7mm MAX. THICKNESS



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A 125V, 1.5A 250V AC UL & CUL APPROVED
5. CONTACT RESISTANCE: 50m ohm max.
6. INSULATION RESISTANCE: DC 500V 100Mega Ohm min.
7. DIELECTRIC STRENGTHS: AC 1500V 1 minute
8. LED: RED 3VDC
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT

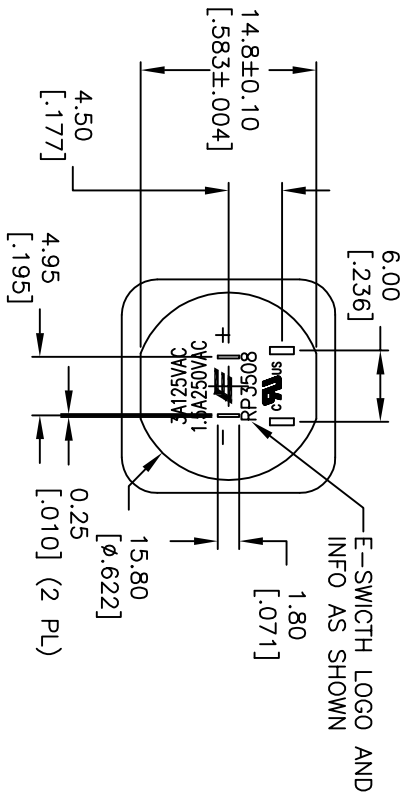

C	17678	CHANGED ACTUATOR DIM. TO 5.50	9/13/07	BF
B	14157	UPDATE DIMS, TITLE, ADD LOGO	7/9/04	AR
A	13718	RELEASED FOR PRODUCTION	1/15/04	AR
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED



RP3508ABLKREDRE DNS

SCALE	1.5:1	DATE	9/13/07	DR	BF	DWG	F130416	REV	C
-------	-------	------	---------	----	----	-----	---------	-----	---