

59060 Stainless Steel Threaded Barrel Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- Stainless steel threaded barrel with retaining nuts
- M8 thread
- Choice of normally open or high voltage contacts
- Customer defined sensitivity
- Choice of cable length and connector


Benefits

- Robust construction makes this sensor well suited to harsh industrial environments
- Simple installation and adjustment using supplied retaining nuts
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium

Applications

- Position and limit
- Security systems
- Linear actuator
- Industrial process control

DIMENSIONS (in) mm

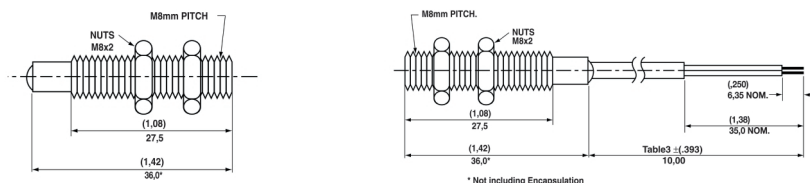

| SCHEMATICS | Switch Type |
|------------|----------------------|
| | White Brown |
| | Black Blue Red |
| | White Brown |

CUSTOMER OPTIONS - Switching Specifications

| TABLE 1 | | | Normally Open | Normally Open High Voltage | Change Over | Normally Closed |
|--------------|------------------|-------------|------------------|----------------------------|-----------------|-----------------|
| Contact Type | | | 1 | 2 | 3 | 4 |
| Switch Type | Power | Watt - max. | 10 | 10 | 5 | 5 |
| Voltage | Switching | Vdc - max. | 200 | 300 | 175 | 175 |
| | Breakdown | Vdc - min. | 250 | 450 | 200 | 200 |
| Current | Switching | A - max. | 0.5 | 0.5 | 0.25 | 0.25 |
| | Carry | A - max. | 1.2 | 1.5 | 1.5 | 1.5 |
| Resistance | Contact, Initial | Ω - max. | 0.2 | 0.2 | 0.2 | 0.2 |
| | Insulation | Ω - min. | 10 ¹⁰ | 10 ¹⁰ | 10 ⁷ | 10 ⁷ |
| Capacitance | Contact | pF - typ. | 0.3 | 0.2 | 0.3 | 0.3 |
| Temperature | Operating | °C | -40 to +105 | -20 to +105 | -40 to +105 | -40 to +105 |
| | Storage | °C | -65 to +105 | -65 to +105 | -65 to +105 | -65 to +105 |
| Time | Operate | ms - max. | 1.0 | 1.0 | 3.0 | 3.0 |
| | Release | ms - max. | 1.0 | 1.0 | 3.0 | 3.0 |
| Shock | 11ms 1/2 sine | G - max. | 100 | 100 | 50 | 50 |
| Vibration | 50-2000 Hz | G - max. | 30 | 30 | 30 | 30 |


CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

| TABLE 2 | | | | | | | | |
|---|------------------|-----------------------------|------------------|-----------------------------|------------------|-----------------------------|------------------|-----------------------------|
| Sensitivity Options:- Activate Distances are approximate using Hamlin 57060 actuator as illustrated Switch AT before modification | | | | | | | | |
| Select Option | S | | T | | U | | V | |
| Switch Type | Pull In AT Range | Activate Distance d (in) mm | Pull In AT Range | Activate Distance d (in) mm | Pull In AT Range | Activate Distance d (in) mm | Pull In AT Range | Activate Distance d (in) mm |
| 1 Normally Open | 12-18 | (.472) | 17-23 | (.354) | 22-28 | (.276) | 27-33 | (.217) |
| 2 High Voltage | | 12.0 | | 9.0 | | 7.0 | | 5.5 |
| 3 Change Over | | (.413) | | (.295) | | (.236) | | |
| 4 Normally Closed | 15-20 | 10.5 | 20-25 | 7.5 | 25-30 | 6.0 | | |

| TABLE 3 | |
|---|----------------------|
| Cable Type:- 24 AWG 7/32 PVC 105°C DOUBLE INSULATED | |
| Standard Lengths | |
| SELECT OPTION | CABLE LENGTH (in) mm |
| 01 | (3,94) 100 |
| 02 | (11,81) 300 |
| 03 | (19,69) 500 |
| 04 | (29,53) 750 |
| 05 | (39,37) 1000 |

| TABLE 4 | | |
|-----------------------|---|--|
| Termination Options:- | | |
| SELECT OPTION | DESCRIPTION (2 WIRE VERSIONS ILLUSTRATED) | |
| A or F | Tinned or untinned leads | |
| B | Crimped terminals | |
| C | 6.35mm fastons | |

ORDERING INFORMATION

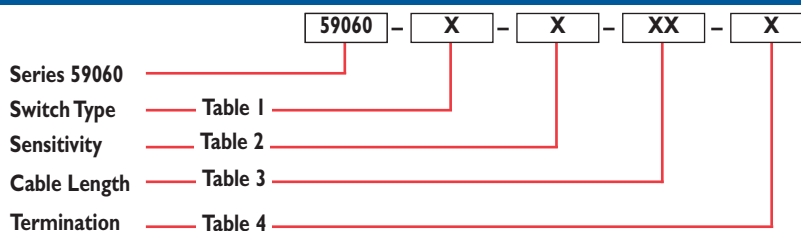

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
 Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
 Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com
 Hamletrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.