





RECOMMENDED P.C.B. LAYOUT
SCALE 1X

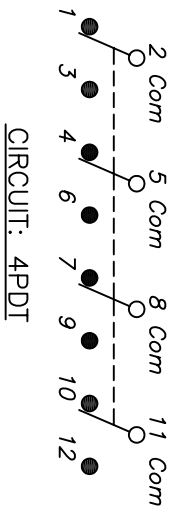

| SWITCH FUNCTION | | |
|----------------------|--------|-----------------------|
| PDS. 1 | PDS. 2 | PDS. 3 |
| DN | NONE | (DN) |
| 2-3,5-6 8-9,11-12 | DPEN | 2-1, 5-4 8,7 11-10 |

(DN) = MOMENTARY

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.4 VOLT-AMPS MAX. @20V MAX. AC OR DC.
 5. CONTACT MATERIAL: GOLD PLATING.
 6. ELECTRICAL LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 7. INSULATION RESISTANCE: 1,000M OHM MIN.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. 2002/95/EC (ROHS) COMPLIANT

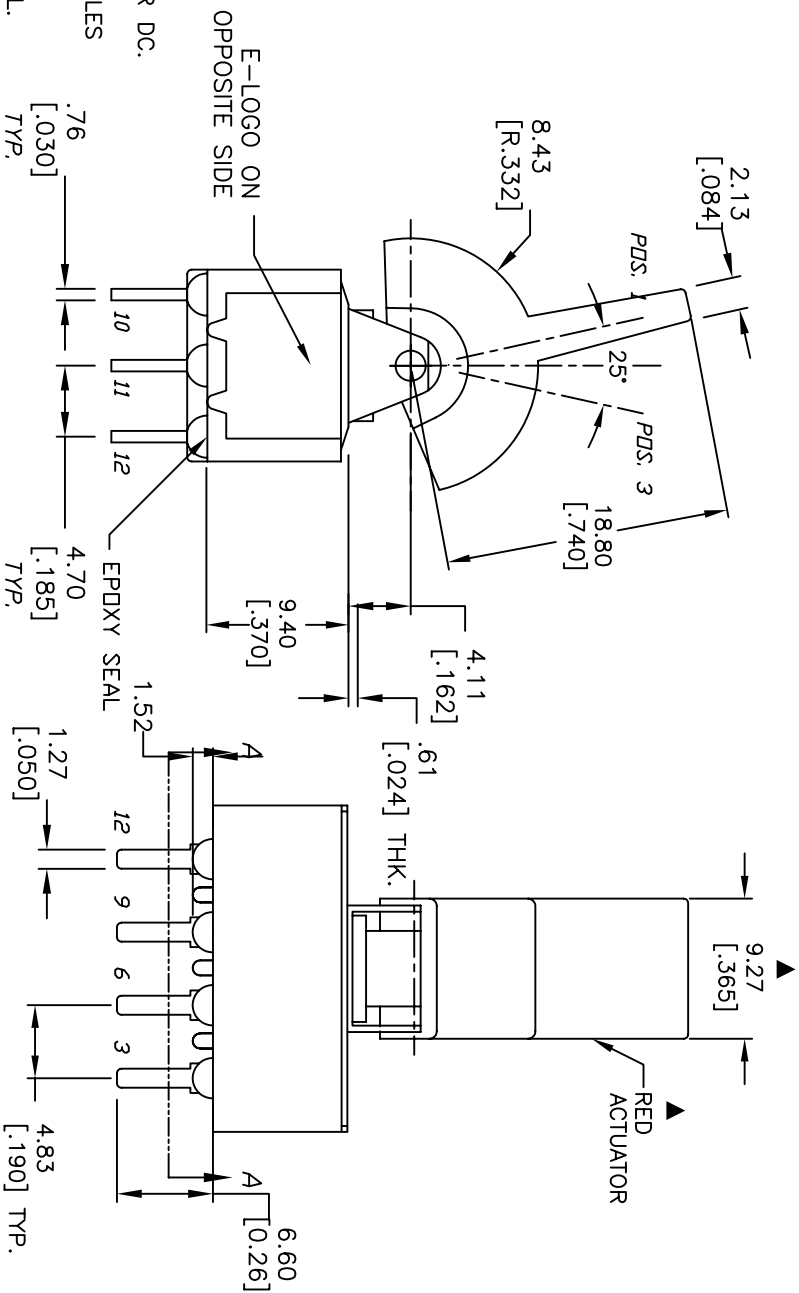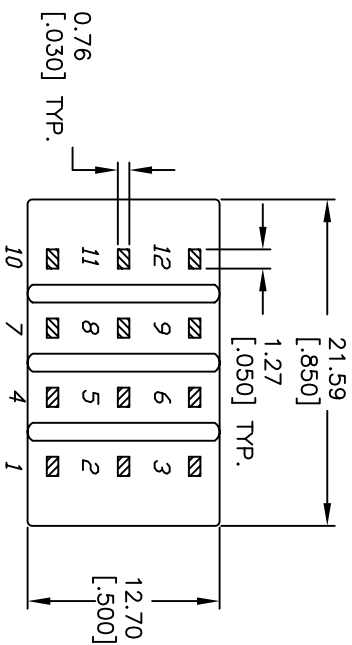

| REV. | ECN No. | DESCRIPTION | DATE | CHKD |
|------|---------|--------------------------------|---------|------|
| B | 17432 | 6.35 DIM TO 6.60, ADD NOTE 11. | 7/3/07 | TN |
| A | 14170 | RELEASED FOR PRODUCTION | 7/16/04 | AR |

| TITLE | SCALE | DATE | DR | DWG | REV |
|-----------------|-------|--------|----|---------|-----|
| 3004P2J2REDM2RE | 2:1 | 7/3/07 | TN | T346013 | B |



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED