




RECOMMENDED PCB HOLES



▲ SWITCH FUNCTION

PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3,5-6	OPEN	2-1,5-4

CONTACT CONFIGURATION

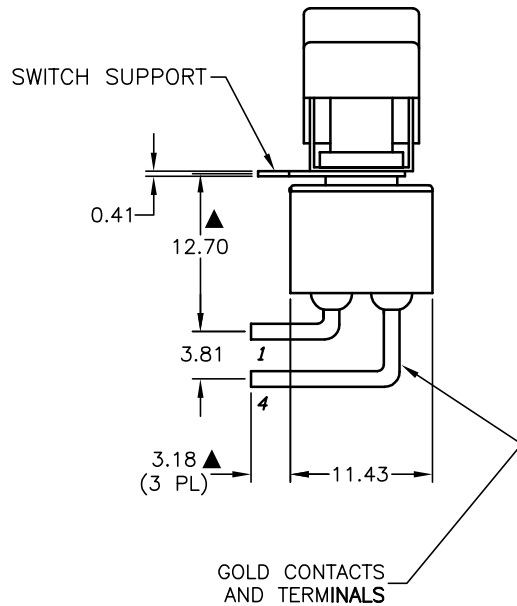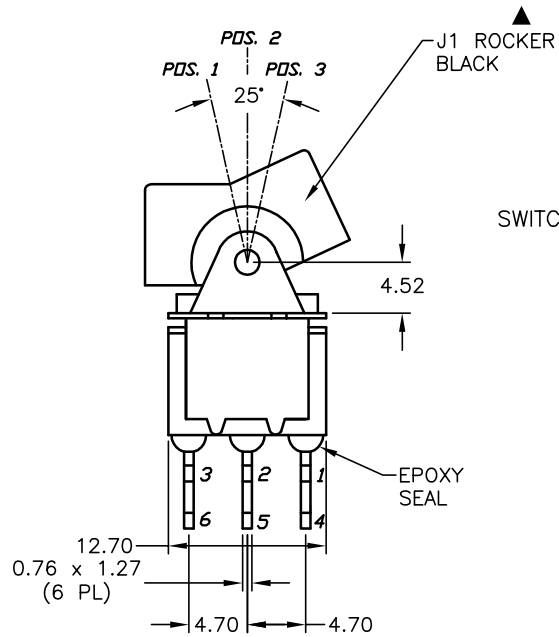

- NOTES:
- ALL DIMENSIONS IN MM
 - GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - RATING: .4VA MAX. @ 20V(AC or DC) MAX.
 - ▲ 5. CONTACTS: GOLD FLASH OVER SILVER PLATED COPPER.
 - ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
 - INSULATION RESISTANCE: 1,000 Mega-ohm min.
 - DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 - OPERATING TEMP.: -30°C to 85°C
 - ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®				
TITLE				
300AWDP1J1BLKM6RE				
REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13948	RELEASED FOR PRODUCTION	4/22/04	AR
SCALE				
2:1		DATE		DR
		4/22/04		AR
DWG			REV	
T301006			A	
<small>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</small>				