



RECOMMENDED PCB LAYOUT



| SWITCH FUNCTION | | |
|-----------------|--------|--------|
| POS. 1 | POS. 2 | POS. 3 |
| DN | DNF | DN |
| 2-3 | OPEN | 2-1 |

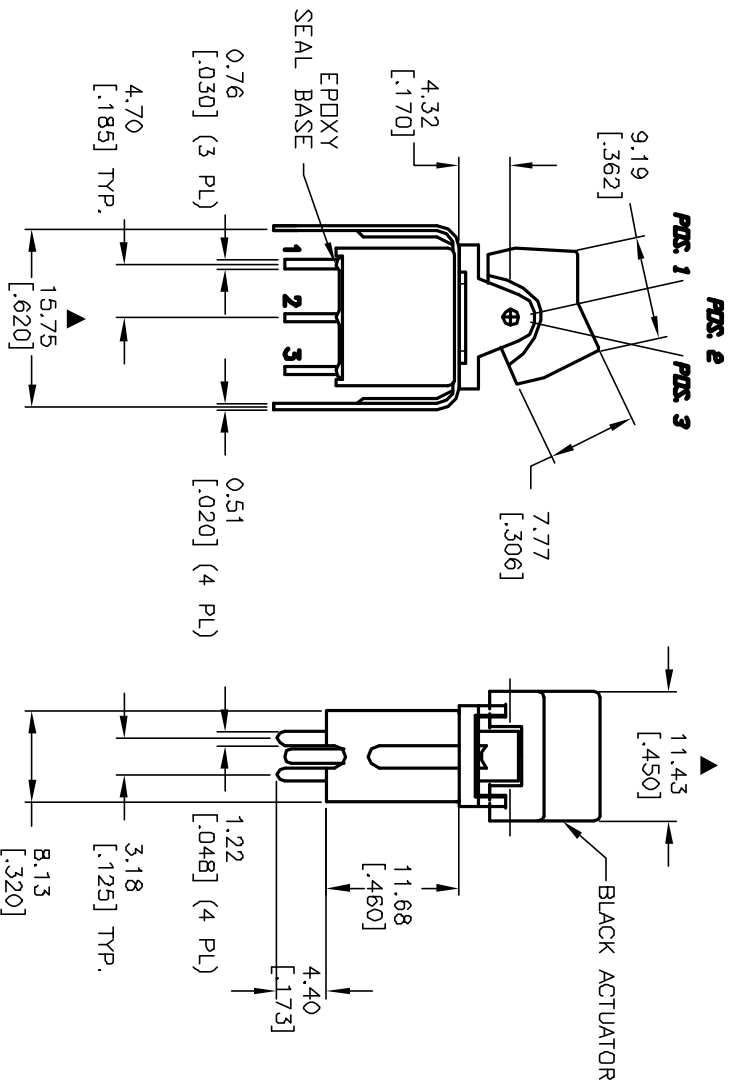

- NOTES:**
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 0.4 VA MAX. ● 20V MAX. AC OR DC
 5. FIXED TERMINAL/MOVING CONTACT: COPPER ALLOY W/GOLD PLATING OVER NICKLE PLATING
 6. ELECTRICAL LIFE: 30,000 make & break cycles @ FULL LOAD.
 7. INSULATION RESISTANCE: 1000MEGA-OHMS min.
 8. DIELECTRIC STRENGTH: 1000V RMS @ SEA LEVEL
 9. OPERATING TEMPERATURE: -30°C to +85°C
 10. ▲ DENOTES CRITICAL PARAMETER.

| | | | | | | | | | | | | |
|---|---------|-------------------------|--------|------|--------------------|--|--|-------|--------|----|---------|-----|
| A | 13190 | RELEASED FOR PRODUCTION | 6/6/03 | AR | TITLE | | | SCALE | DATE | DR | DWG | REV |
| REV. | ECN No. | DESCRIPTION | DATE | CHKD | 300AWSP3J5BLKVS2RE | | | 1.5:1 | 6/6/03 | AR | T301353 | A |
| <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED</p> | | | | | | | | | | | | |

