



RECOMMENDED PCB LAYOUT

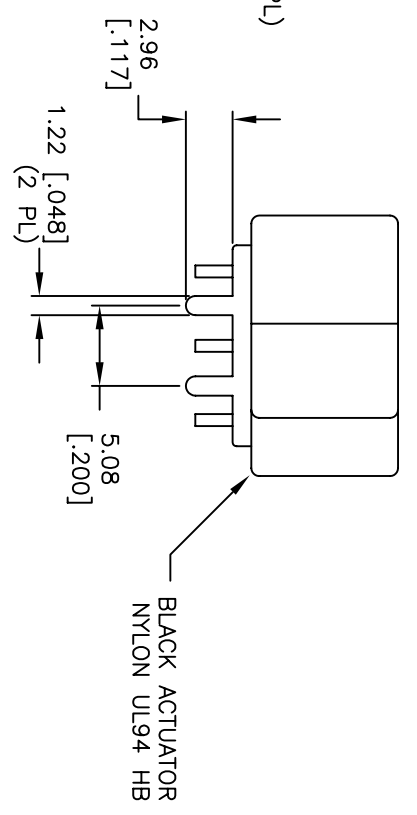

\*\*SHOWN IN MOMENTARY POSITION FOR OVERALL HEIGHT




CIRCUIT: SPST

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	DFFF	<DN>
2-3	OPEN	2-1

NOTES: (< >)=Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC or DC
- ▲5. MATERIAL: FIXED TERMINAL & MOVING CONTACT  
Copper Alloy w/GOLD plate over Nickel plate.
6. CONTACT RESISTANCE: 10mILLI Ohms max initial @2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -50°C to 85°C
11. 2002/95/EC (ROHS) COMPLIANT

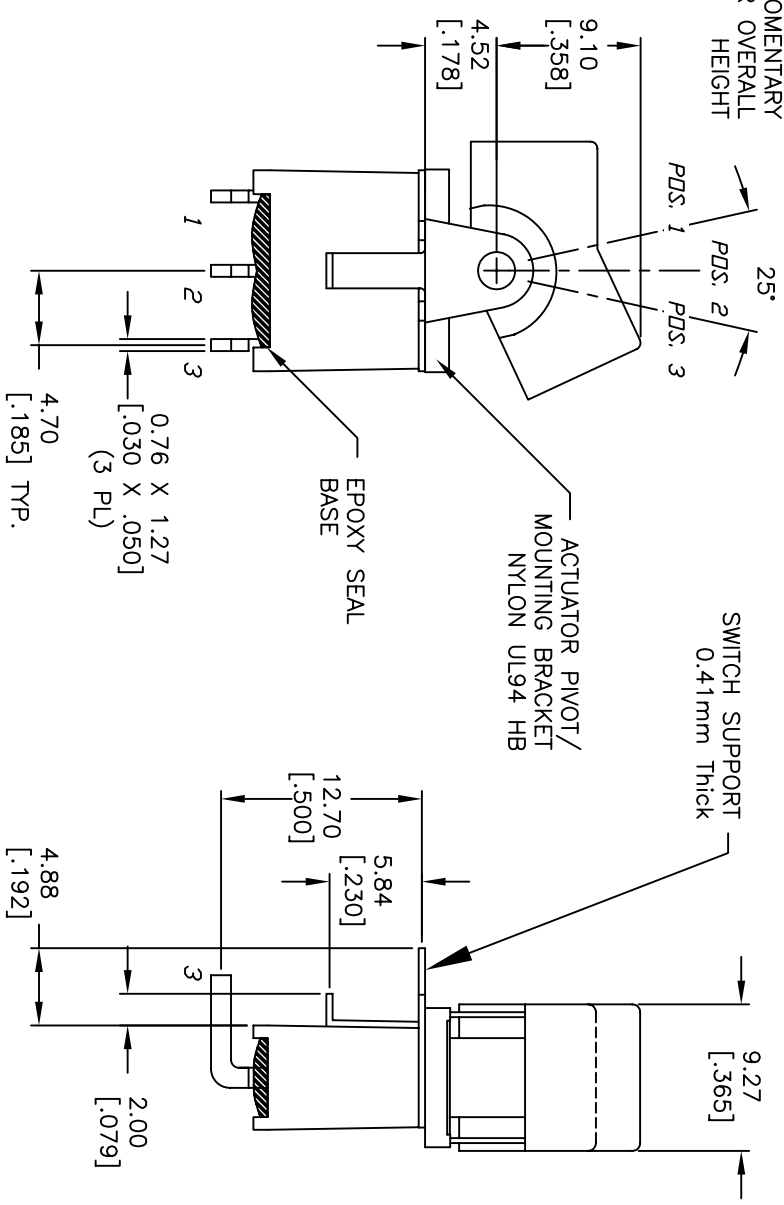

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
B	17407	FIXED TITLE	6/21/07	TN
A	12098	RELEASED FOR PRODUCTION		

TITLE	SCALE	DATE	DR	DWG	REV
300A WSP4 J1M6RE	2:1	6/21/07	TN	T301429	B



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED