


RECOMMENDED PANEL MOUNTING




CIRCUIT: SPDT

CONTACT CONFIGURATION

| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| PDS. 1          | PDS. 2 | PDS. 3 |
| (DN)            | OFF    | (DN)   |
| 2-3             | OPEN   | 2-1    |

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. FIXED AND MOVING CONTACTS: SILVER PLATED COPPER ALLOY
5. CONTACT RATING: 5 AMPS W/RESISTIVE LOAD @ 120VAC or 28DC  
2 AMPS W/RESISTIVE LOAD @ 250VAC
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
9. OPERATION TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

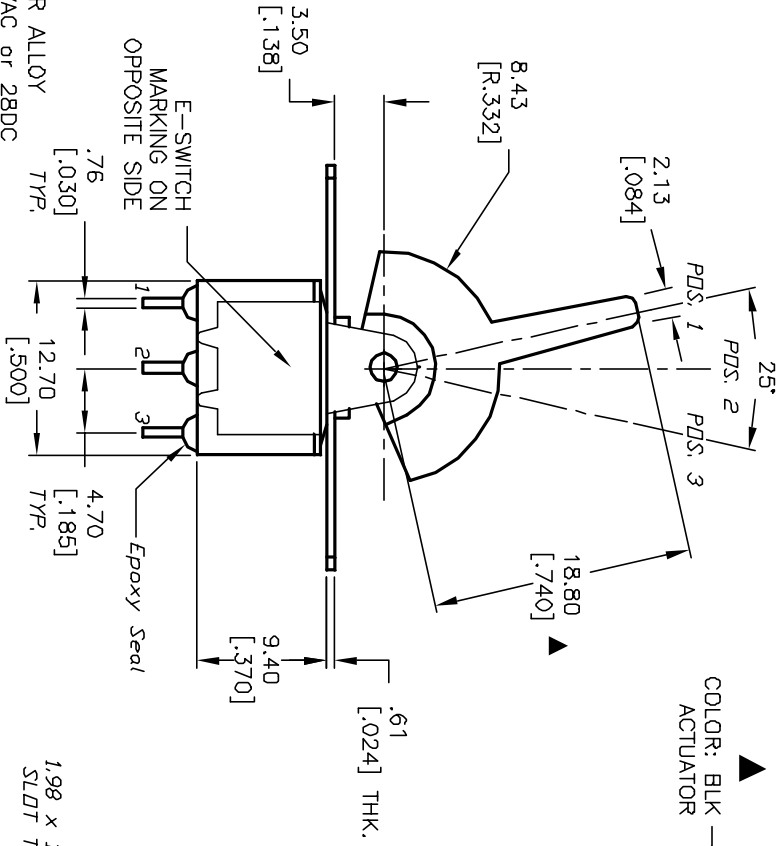

COLOR: BLK ACTUATOR

**E-SWITCH®**

300SP4R2BLKM1QE

| REV. | ECN No. | DESCRIPTION             | DATE    | CHKD |
|------|---------|-------------------------|---------|------|
| A    | 13074   | RELEASED FOR PRODUCTION | 4/23/03 | AR   |

| TITLE           |  | SCALE | DATE    | DR | DWG     | REV |
|-----------------|--|-------|---------|----|---------|-----|
| 300SP4R2BLKM1QE |  | 2:1   | 4/23/03 | AR | T314068 | A   |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED