




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF (B)	ON (B)
2-3, 5-6	OPEN	2-1, 5-4


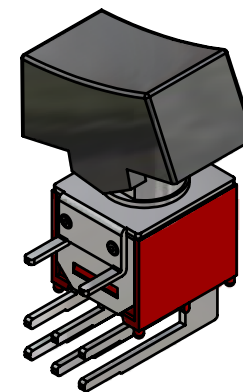


NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ PLATING MATERIAL: SILVER
- RATING: 1A @250VAC
3A @120VAC OR 28VDC
- ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

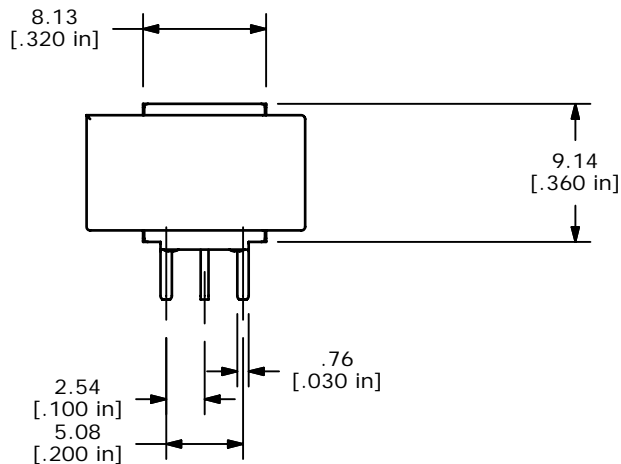

ISOMETRIC

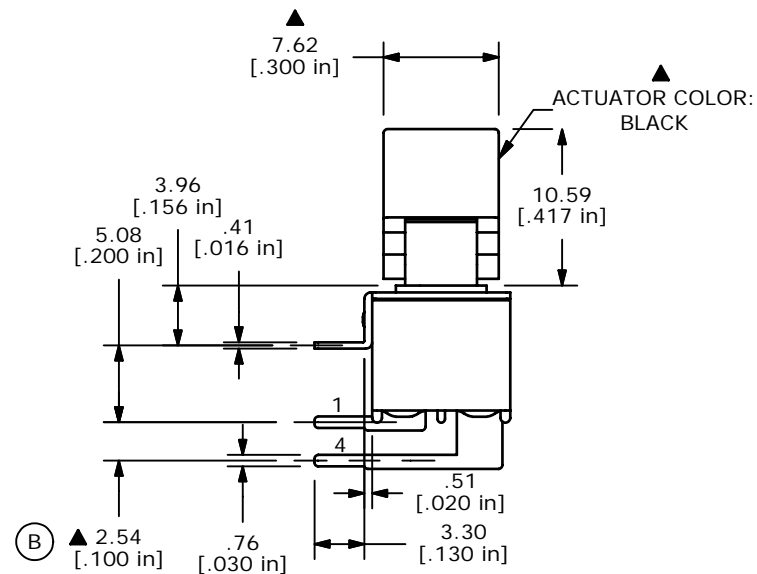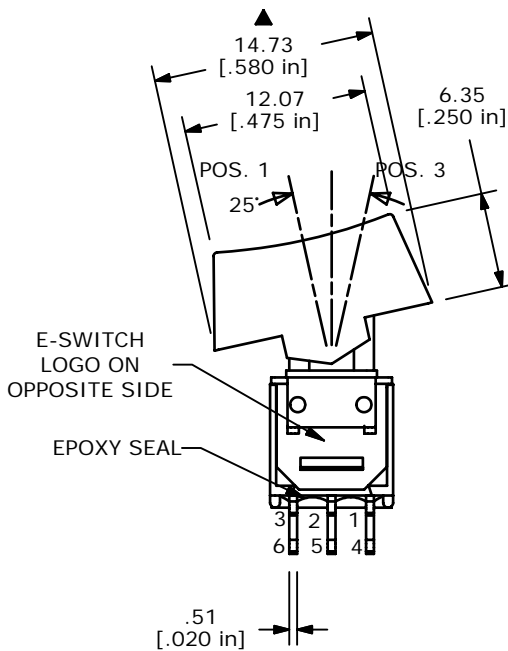

B	15219	CHANGES NOTED WITH (B)	8/30/05	PH
A	15079	RELEASED FOR PRODUCTION	7/11/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 400MDP3R1BLKM6QE

SCALE 2:1	DATE 7/11/2005	DR JB	DWG T408002	REV B
-----------	----------------	-------	-------------	-------