
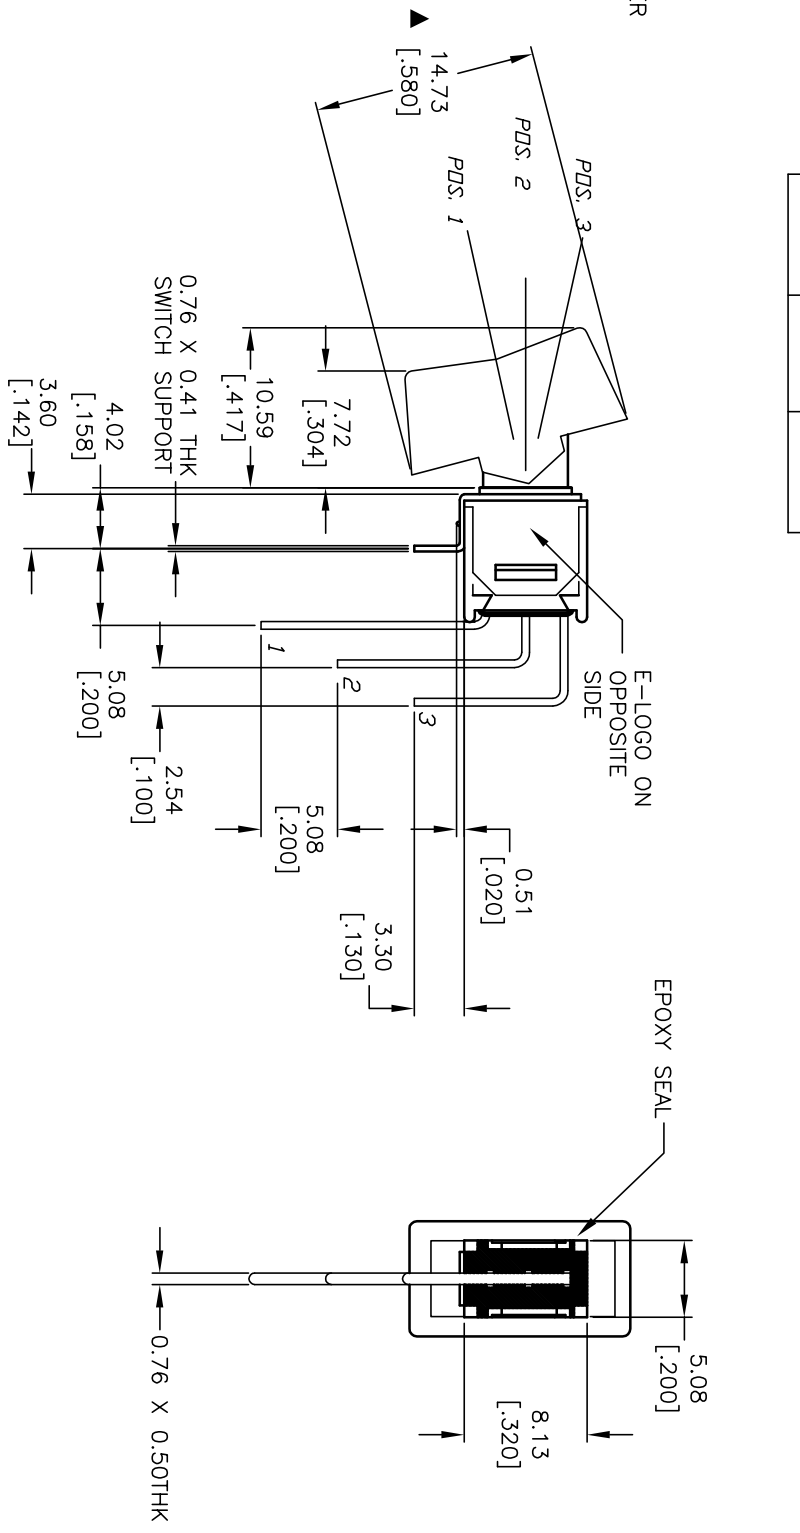


CIRCUIT: SPDT  
CONTACT CONFIGURATION

RECOMMENDED P.C.B. LAYOUT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	OFF	DN
2-3	OPEN	2-1

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 3A @120VAC, OR 28VDC 1A @250VAC
  5. FIXED TERMINAL/MOVING CONTACT MATERIAL: COPPER ALLOY w/SILVER PLATING
  6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
  7. INSULATION RESISTANCE: 1,000 M ohm min.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  9. OPERATING TEMP. -30°C to +85°C
  10. ▲ DENOTES CRITICAL PARAMETER.

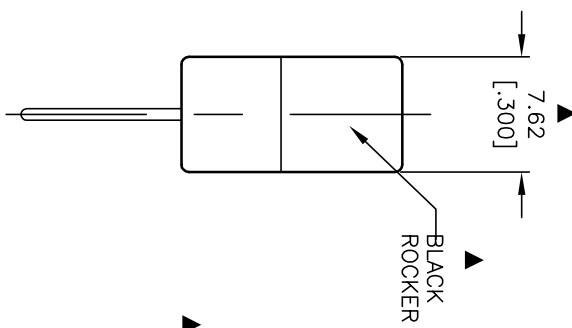

**E-SWITCH®**

A	14323	RELEASED FOR PRODUCTION	9/16/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
400MSP3R1BLKM7QE				
SCALE	DATE	DR	DWG	REV
2:1	9/16/04	AR	T413005	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED