

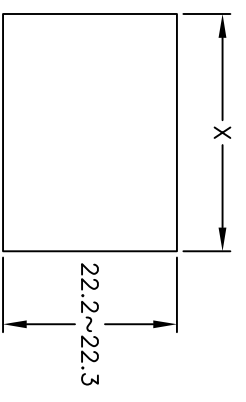


PANEL THICKNESS	X dimension
0.75~1.25 [0.30~0.49]	30.0 +0.2 [1.181]
1.25~2.0 [0.49~0.79]	30.2 +0.2 [1.189]
2.0~3.0 [0.79~1.18]	30.6 +0.2 [1.205]




RECOMMENDED PANEL MOUNTING
NOT TO SCALE

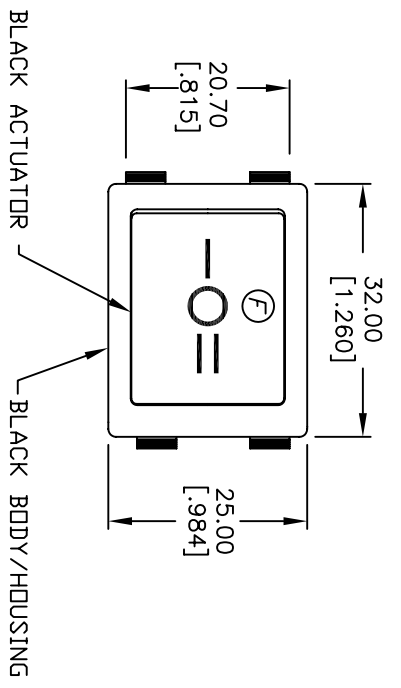

CIRCUIT: DPDT
ON-OFF-ON

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 15A @125VAC;
10A @250VAC. (Normal Conditions)
 5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plated.
TERMINAL: Copper Alloy w/Silver plate
 6. ELECTRICAL LIFE: ≥10,000 cycles
 7. MECHANICAL LIFE: 30,000 cycles
 8. CONTACT RESISTANCE: <20 mΩ-Ohms initial
 9. DIELECTRIC STRENGTH: >1,500V AC 1min
>3,000V between poles.

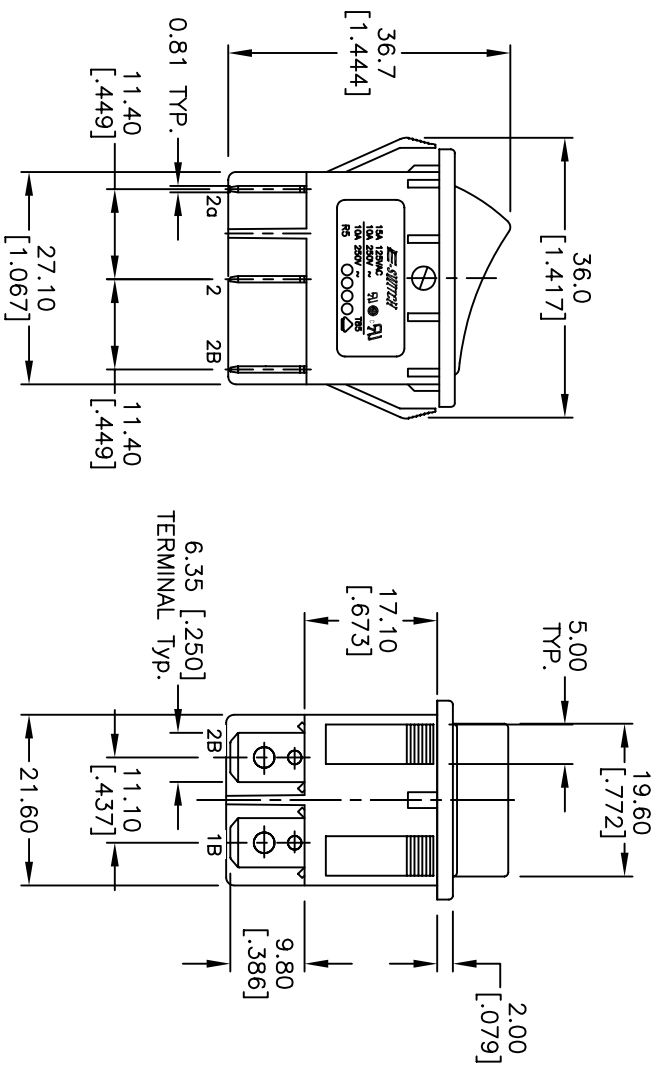

REV.	ECN NO.	DESCRIPTION	DATE	CHKD	PH
F	15241	REVISED SWITCH ON OFF ON	9/6/05		PH
E	12835	REV. NT4 TO CURRENT SPECS	2/25/03		CJB
D	12776	REVISED PANEL CUTOUT	1/29/03		CJB
C	12725	REVISED NOTE 4	1/13/03		CJB
B	12296	REVISED /ADD NOTES 5-9	10/10/02		CJB

TITLE		SCALE	DATE	DR	DWG	REV
RSD BLK BLK C F 0		1:1	7-13-00	GLG	M050211	F

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED